PVM-6041QM

SERVICE MANUAL

AEP Model

Chassis No. SCC-F09D-A



SPECIFICATIONS

Video signal

Color system	PAL, SECAM, NTSC3.58, NTSC4.43
Resolution	250 TV lines
Frequency response	6.0 MHz (−3.0 dB) at all inputs
Synchronization	AFC time constant 1.0 msec.

Picture performance

Normal scan	6% over scan of CRT effective screen area
Underscan	3% underscan of CRT effective screen area
H. linearity	Less than 7.0% (typical)
V. linearity	Less than 7.0% (typical)
Convergence	Central area: 0.50 mm (typical) Peripheral area: 0.60 mm (typical)
Raster size stability	H: 1.0%, V: 1.5%
High voltage regulation	3.0%
Color temperature	D65

Inputs and Outputs

Inputs	VIDEO IN: BNC connector 1 Vp-p ±6 dB, sync negative AUDIO IN: phono jack, −5 dBs, less than 47 kohms R/R-Y, G/Y, B/B-Y: BNC connector R, G, B channels: 0.7 Vp-p, ±6 dB Sync on green: 0.3 Vp-p, negative,75 ohms terminated R-Y, Y, B-Y channels: 0.7 Vp-p, ±6 dB (standard color bar signal of 100% chrominance) EXT SYNC IN: BNC connector Composite sync 4 Vp-p, ±6 dB, negative
Loop-through outputs	VIDEO OUT: BNC connector, 75 ohms terminated AUDIO OUT: phono jack
Remote input	REMOTE: 8-pin mini DIN connector (See the pin assign ment on the right side of this page)
Audio Output level	0.5 W

General

Power consumption	40 W at AC operation 40 W at DC operation
Power requirements	100 – 240 V AC, 50/60 Hz 12 V DC, with the Sony (NP-1A/1B) battery pack (not supplied) or AC-500/500CE AC power adaptor (not supplied)
Operating temperature range	0 – 35°C
Storage temperature range	−10 – +40°C
Humidity	0 – 90%

— Continued on next page —

TRINITRON® COLOR VIDEO MONITOR

SONY®

Dimensions	Approx. 146 × 173 × 352.5 mm (w/h/d) (5¾ × 6⅞ × 14 inches) not incl. projecting parts and controls
Weight	Approx. 5.5 kg (12 lb 2 oz) not incl. battery packs
Accessory supplied	AC power cord (1) Cable with an 8-pin connector AC Plug holders (1 set)

Pin Assignment

REMOTE connector (8-pin mini DIN)

Pin No.	Signal
1	Blue only
2	H/V delay
3	GND
4	INT/EXT SYNC
5	–
6	Underscan/normal scan
7	RGB/Y R-Y B-Y
8	RGB/LINE

For remote control, connect the pin of the desired function to pin 3 (GND).

Design and specifications are subject to change without notice.

TABLE OF CONTENTS

(CAUTION)

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.
THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

SECTION 1
GENERAL

1-1. FEATURES

Four color systems available

The monitor can display PAL, SECAM, $NTSC_{3.58}$ and $NTSC_{4.43}$* signals. The appropriate color system is selected automatically.

* A signal of $NTSC_{4.43}$ is used for playing back NTSC recorded video cassettes with a video tape recorder/player especially designed for use with this system.

Blue only picture

The picture can be displayed in blue and black only. This facilitates hue adjustment and the observation of video noise.

Analog RGB/component input connectors

Analog RGB or component (Y, R-Y, and B-Y) signals from video equipment can be input through these connectors.

Beam current feedback circuit

The built-in beam current feedback circuit assures stable white balance.

Comb filter

When NTSC video signals are received, a comb filter activates to increase the resolution, resulting in fine picture detail without color spill or color noise.

Automatic termination of BNC connectors

The rear BNC input connectors are internally terminated 75 ohms when nothing is connected to the output connector (VIDEO OUT). However, this impedance limit is automatically removed when a cable is plugged into the output connector, and the signal is looped-through as it is.

EIA standard 19-inch rack mounting

By using an MB-507 mounting bracket (not supplied), the monitor can be mounted in an EIA standard 19-inch rack. For details on mounting, see the instruction manual of the MB-507.



1-2. LOCATION AND FUNCTION OF PARTS AND CONTROLS

Front

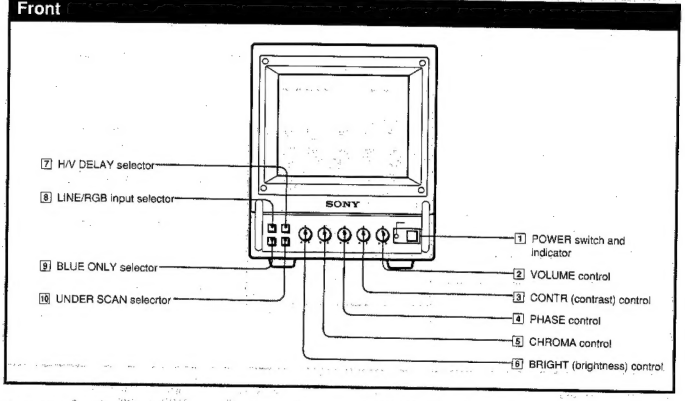

1 POWER switch and indicator
Depress to turn the monitor on. The indicator will light up in green.
The POWER indicator also functions as the battery indicator. When the internal battery becomes weak or the power supplied through the DC12V IN jack decreases, the indicator flashes.

2 VOLUME control
Turn this control clockwise or counterclockwise to obtain the disired volume.

3 CONTR (contrast) control
Turn clockwise to make the contrast stronger and counterclockwise to make it weaker.

4 PHASE control
Turn clockwise to make the skin tones greenish and counterclockwise to make them purplish.

5 CHROMA control
Turn clockwise to make the color intensity stronger and counterclockwise to make it weaker.

Note

- The PHASE and CHROMA control settings have no effect on an analog RGB signal.
- The PHASE control has no effect on component signals.
- The PHASE control setting is effective only for the NTSC system.

6 BRIGHT (brightness) control
Turn clockwise for more brightness and counterclockwise for less.

7 H/V DELAY selector
Depress this button to observe the horizontal and vertical sync signals at the same time. The horizontal sync signal is displayed in the left quarter of the screen; the vertical sync signal is displayed near the center of the screen.

8 LINE/RGB input selector
Select the program to be monitored. Keep this button released (LINE) for a signal fed through the LINE connectors. Depress this button (RGB) for a signal fed through the RGB/COMPONENT connectors.

9 BLUE ONLY selector
Depress this button to turn off the red and green signals. A blue signal is displayed as an apparent monochrome picture on the screen. This facilitates "chroma" and "phase" control adjustments and the observation of video noise.

10 UNDER SCAN selector
Depress this button for underscanning. The display size is reduced by approximately 3% so that four corners of the raster are visible.

Rear



11 LINE connectors
To monitor the signal fed through these connectors, keep the LINE/RGB selector on the front panel released (LINE).
VIDEO IN (BNC): Connect to the video output of a video camera, VCR or other video equipment.
VIDEO OUT (BNC): Loop-through output of the VIDEO IN connector. Connect to the video input of a VCR or another monitor.
AUDIO IN (phono jack): Connect to the audio output of a VCR or a microphone (through a suitable microphone amplifier).
AUDIO OUT (phono jack): Loop-through output of the AUDIO IN connector. Connect to the audio input of a VCR or another monitor.

12 SYNC INT/EXT (sync internal/external) selector
Select the internal or external sync.

13 RGB/COMP (RGB/component) selector
Select the RGB or component (Y, R-Y and B-Y) signal. Keep the LINE/RGB input selector on the front panel depressed (RGB), otherwise the RGB/COMP selector does not function.

14 REMOTE connector (8-pin mini DIN)
Connect to a remote controller. For the pin assignment of this connector, see "Specifications" on page 5.

15 DC 12V IN jack (XLR, 4 pin)
Connect the Sony AC-500/500CE AC power adaptor (not supplied).

16 RGB/COMPONENT input connectors
R/R-Y, G/Y, B/B-Y, (BNC), AUDIO (phono):
To monitor a signal fed through these connectors, depress the LINE/RGB selector on the front panel (RGB).

To monitor the analog RGB signal
Connect to the analog RGB signal outputs of a video camera. Set the RGB/COMP selector to RGB.

To monitor the component signal
Connect to the R-Y/Y/B-Y component signal outputs of a Sony Betacam video camera. Set the RGB/COMP selector to COMP (component).

SYNC (BNC):
To operate the monitor on an external sync, connect the reference signal from a sync generator. Set the SYNC INT/EXT selector to EXT (external).

17 V HOLD (vertical hold) control
Turn to stabilize the picture if it rolls vertically.

18 AC IN socket
Connect the supplied AC power cord to this socket and to a wall outlet.

19 EJECT button
Press the EJECT button upwards to remove the battery pack.

20 BATTERY compartment
Insert the NP-1A/1B battery pack (not supplied).

1-3. POWER SOURCES

House Current

Connect the supplied AC power cord to the AC IN socket and to a wall outlet.



When the AC power cord is plugged into the AC IN socket, the battery pack (if installed) or the AC power adaptor (if connected) is automatically disconnected.

To connect an AC power cord securely with AC plug holders

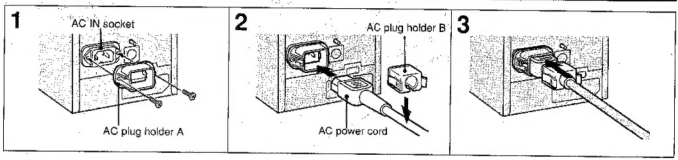

1 Remove the AC IN socket screws and then use them to attach AC plug holder A (supplied) to the AC IN socket.

2 Plug the power cord to the AC IN socket. Then, attach the supplied AC plug holder B on top of the AC power cord.

3 Slide AC plug holder B over the cord until it connects with AC plug holder A.

To remove the AC power cord
Pull out AC plug holder B by squeezing the left and right sides.

Rechargeable Battery



To remove the battery pack, press the EJECT button upwards.

For charging, use the BC-1WA battery charger (not supplied) for the NP-1A or the BC-1WB for the NP-1B.

Note

Make sure that the AC power cord and the AC power adaptor are disconnected from the monitor. Otherwise, the monitor cannot operate on the battery pack.

SECTION 2
DISASSEMBLY

2-1. CABINET REMOVAL

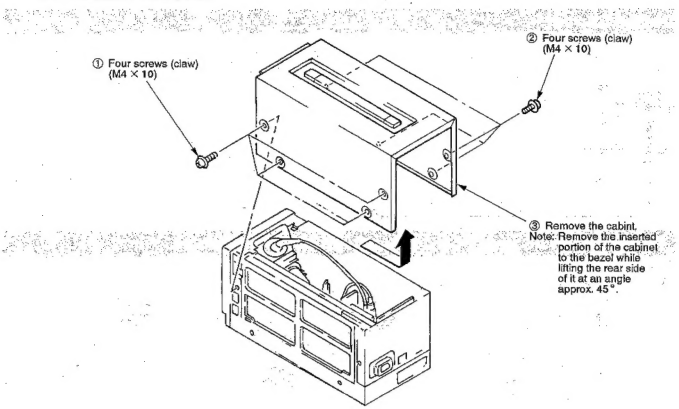

2-2. B BOARD REMOVAL

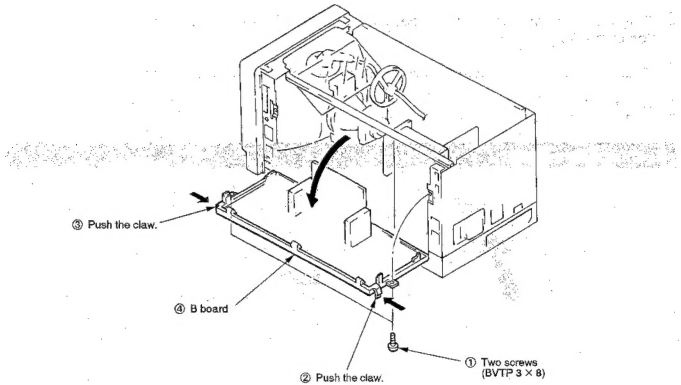

2-3. SWITCHING REGULATOR REMOVAL

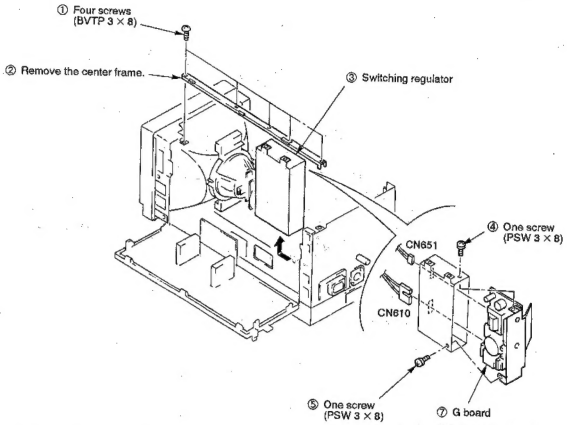

2-4. D BOARD REMOVAL

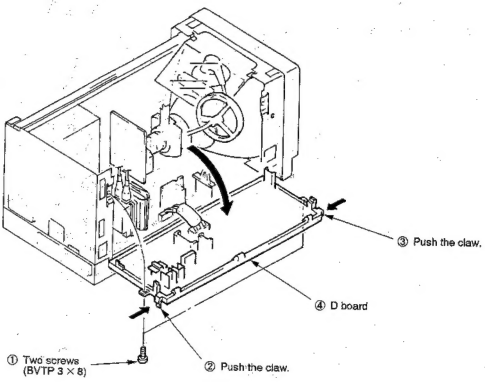

2-5. P BOARD REMOVAL

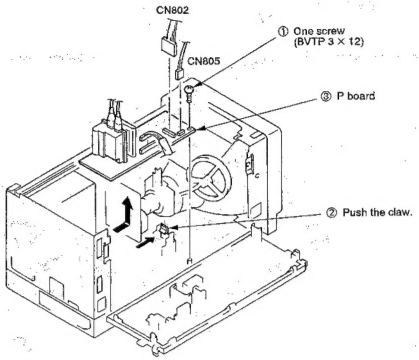

2-6. REAR ASSY REMOVAL

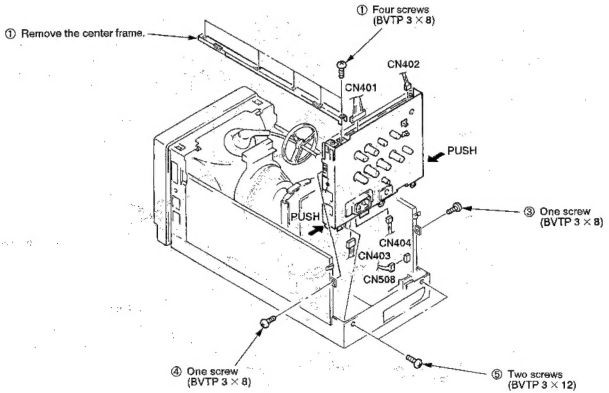

2-7. HB AND FC BOARDS REMOVAL

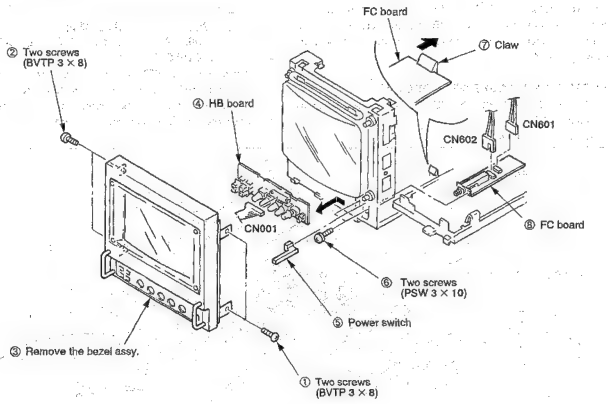

2-8. PICTURE TUBE REMOVAL

Note : Caution for ANODE CAP installation.
When you replace PICTURE TUBE or FBT, remove RTV on ANODE CAP so that PICTURE TUBE and FBT can be separated. Please adhere picture tube and anode cap in accordance with the following procedure.

ADHERING PROCEDURE OF ANODE CAP.

1. Clean PICTURE TUBE ANODE CAP with ethnaol to remove original RTV.
2. Dry clean face with air.
3. Use KE-490RTV (RTV silicone adhesive, SHIN-ETSU CHEMICAL).

Part. No.	Description
7-322-065-19	Silicone (RTV) KE-490W

4. Install ANODE CAP.
5. Adeguately apply RTV to the entire picture tube anode area, place the anode cap onto the picture tube and push it down securety so that no air pockets remain beneath the cap.
6. Dry more than 12 hours at room temperature.

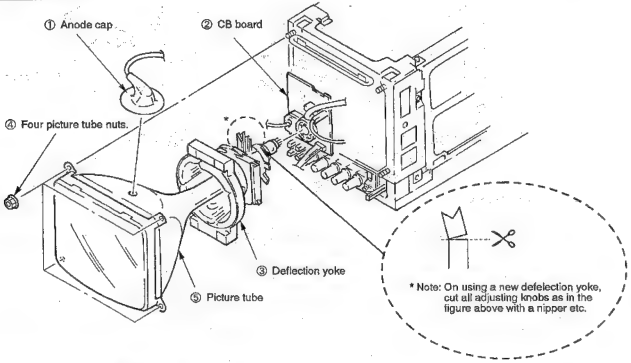

- **REMOVAL OF ANODE-CAP**
- **REMOVING PROCEDURES**

① Turn up one side of the rubber cap in the direction indicated by the arrow ⓐ.



② Using a thumb pull up the rubber cap firmly in the direction indicated by the arrow ⓑ.



③ When one side of the rubber cap is separated from the anode button, the anode-cap can be removed by turning up the rubber cap and pulling up it in the direction of the arrow ⓒ.

HOW TO HANDLE AN ANODE-CAP

① Don't hurt the surface of anode-caps with sharp shaped material!
② Don't press the rubber hardly not to hurt inside of anode-caps!
A metal fitting called as shatter-hook terminal is built in the rubber.
③ Don't turn the foot of rubber over hardly!



SECTION 3
SET-UP ADJUSTMENTS

- The following adjustments should be made when a complete realignment is required or a new picture tube is installed.
- These adjustments should be performed with rated power supply voltage unless otherwise noted.

The control and switch below should be set as follows unless otherwise noted:

CONTRAST control 80%
BRIGHTNESS control 50%

Perform the adjustments in order as follows:

3-1. Beam Landing
3-2. Convergence
3-3. Focus
3-4. White Balance

Note: Test equipment Required.

1. Color Bar/Pattern Generator
2. Degausser
3. Color Analyzer (Minolta)
4. Luminance Level Meter

3-1. BEAM LANDING

Precaution

1. Set the side of the unit with the PICTURE TUBE so that it faces east or west in order to reduce the influence of external magnetic force.
2. Turn the power switch for the unit ON and erase the magnetic force using a degausser.

(1) Beam Landing

1. Receive an entirely white signal with the pattern generator.
   CONTRAST ..... MAX.
   BRIGHTNESS ..... set easy to observe
2. Adjust the white balance, G2 voltage and convergence roughly.
3. Loosen the deflection yoke mounting screw, and set the purity control to the center as shown in Fig.3-1.
4. Switch over the pattern generator to green.
5. Move the deflection yoke backward, and adjust with the purity control so that green is in the center and blue and red are at the sides, evenly. (Fig.3-2)
6. Move the deflection yoke forward, and adjust so that the entire screen becomes green. Repeat 5 to 7 as to red and blue.
7. When landing at the corners is not right, correct by using the magnet. (Fig.3-3)
8. When the position of the deflection yoke is determined, tighten it with a deflection yoke mounting screw.

CAUTION; When correction magnet is used, be sure to degauss the unit.





Fig.3-1

Fig.3-2

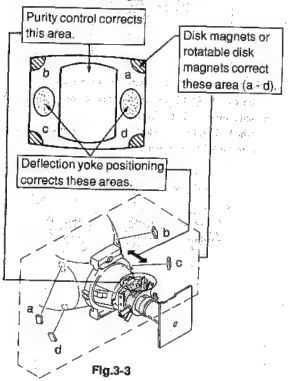

Fig.3-3

3-2. CONVERGENCE

(1) Horizontal and vertical Static Convergence Adjustment on the Center of Screen.

- Before starting, perform V. SIZE, V. CENT, H.SIZE, H.CENT and Screen Distortion Adjustment rightly.

(Static Convergence Adjustment)

1. Receive a dot signal, setting BRIGHTNESS minimum and set CONTRAST to normal.
2. Adjust H.STAT VR to coincide red, green and blue dots on the center of screen. (Horizontal movement)
3. Adjust V.STAT magnet to coincide red, green and blue dots on the center of screen. (Vertical movement)



* If the red, green and blue dots do not coincide on the center of screen with H.STAT VR, perform adjustment using V.STAT at the same time while tracking.
(Tilt the V.STAT magnet and adjust static convergence to open or close the V.STAT magnet.)



4. When the V.STAT magnet is moved in the direction of arrow A and b, red, green and blue dots move as shown below.

① When moving the V.STAT Magnet open or close.



② When moving the V.STAT magnet counterclockwise.



③ When moving the V.STAT magnet clockwise.



④ When tilt the V.STAT magnet and open or close.



* If the red and green dots do not coincide with blue dot, adjustment with BMC (6-poles) magnet.

5. HMC and VMC correction for BMC (6-Poles) magnet.

① HMC (Horizontal Misconvergence) correction and motion of the Electron Beam with the BMC (6-poles) magnet.



② VMC (Vertical Misconvergence) correction and motion of the Electron Beam with the BMC (6-poles) magnet.





(2) Horizontal and Vertical Dynamic Convergence Adjustment at the Environs of the Screen (Dynamic Convergence Adjustment)

1. When there is misconvergence at the sides of screen, adjust for best convergence as follows by moving the deflection yoke.
2. Loosen deflection yoke screw. Remove deflection yoke spacers. Move the deflection yoke for best convergence. Tighten the deflection yoke screw. Install three deflection yoke spacers.

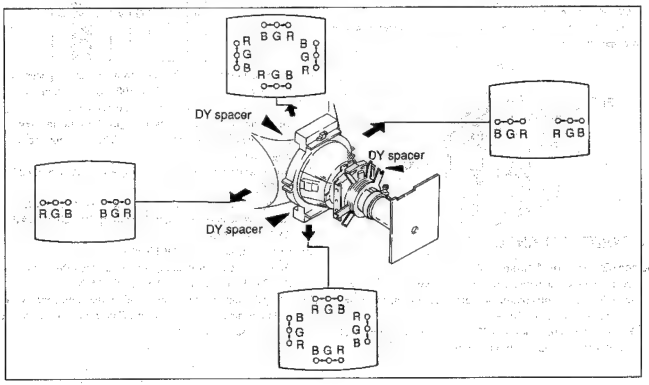

Screen-corner Convergence





3-3. FOCUS

1. Receive the broadcast.
2. CONTRAST → Normal
3. Adjust FOCUS control so that the focus on the center of screen becomes to the best.



3-4. WHITE BALANCE

[Screen (G2) Voltage Adjustment]

1. Receive a dot signal with the pattern generator.
2. Adjust R. G. B cut-off controls so that respective cathode voltage against ground becomes 103V DC.
3. Observing the screen, adjust SCREEN control so that the background of the dot signal is bright dimly.



[White Balance]

1. Receive a color-bar pattern signal with the pattern generator. (Make black and white screen by chroma switch off.)
2. • BRIGHTNESS 50%
   • CONTRAST ..... Minimum
   • CHROMA 50%
   • DRIVE control ..... Mechanical center
   • BKG control ..... Mechanical center
3. Adjust RV118 (SUB BRT) on B board so that the blue stripe portion on the color-bar pattern signal is bright dimly.



4. Receive an entirely white signal from the pattern generator.
5. CONTRAST ..... 70% (90 degree clockwise from mechanical center.)
6. Using the luminance level meter, adjust the luminance level of the pattern generator becomes 3 Nits. (The condition the screen is bright dimly.)
7. Adjust white balance at cut-off using RV119 (G-C/O) and RV121 (B-C/O).
8. Change the all-white signal luminance level to 100 IREs.
9. Adjust white balance at high-light using RV120 (G-GAIN) and RV121 (B-GAIN).
10. Change the unit to blue ONLY mode.
11. Adjust white balance (at high-light) in blue ONLY mode using RV124 *R-GAIN/BL) and RV125 (G-GAIN/BL).
12. Using the luminance level meter, adjust the luminance level of the pattern generator becomes 8 Nits. Confirm that white balance at cut-off is satisfactory..

MEMO

SECTION 4
SAFETY RELATED ADJUSTMENTS

4-1. SAFETY RELATED ADJUSTMENTS

B+ ADJUSTMENT AND B+ MAX CHECK FOR SERVICING (⊟ RV651)

The following adjustments should always be performed when replacing the following components (marked with ◪ on the schematic diagram).

◪ on G board : (Power supply block)
IC601, IC651, PH601, C654, R653, R655, R656, R657, RV651.

1. Input the AC power supply voltage $240V^{+1}_{-0}$ V.
2. Input the monoscope signal.
3. Set as follows.
   - CONTRAST 80%
   - BRIGHTNESS 50%
4. Connect the digital multimeter to RY1601 pin-⑦ on the D board.
5. Adjust RV651 on the G board so that the +B voltage becomes 40.0 ± 0.1 V.
6. After adjusting RV651, fix it with an epoxy.
7. Input the AC power supply voltage $240V^{+1}_{-0}$ V.
8. Input the dot signal.
9. Set as follows.
   - CONTRAST .....Minimum
   - BRIGHTNESS .....Minimum
10. Check that the B+ voltage is below 41.9V.
    If it is above this value, repeat from step 1.

B+ MAX IN DC POWER INPUT MODE, CONFIRMATION (⊟ RV1603)

The following adjustments should always be performed when replacing the following components (marked with ◪ on the schematic diagram).

◪ on D board :
Q1601, Q1602, Q1603, D1601, D1602, D1603, D1604, D1605, C1601, C1602, R1601, R1602, R1603, R1604, R1605, R1606, R1607, R1608, R1629, R1628, R1630, RV1601, RV1603.

1. Supply DC $12V^{+0.4}_{-0}$ V from DC 12V IN connector.
2. Receive a dot signal.
3. • CONTRAST .....Minimum
   • BRIGHTNESS .....Minimum
4. Connect a digital multimeter to C1605 positive + side of D board.
5. Turn RV1601 on the D board fully clockwise. Confirm that the voltage of C1605 + pin is less than 41.9V DC.
6. If step 5 is not satisfied, readjust the RV1603. After adjusting, fasten RV1603 in place with epoxy.

HOLD-DOWN CIRCUIT CONFIRMATION (⊟ RV833) AND READJUSTMENTS

The following adjustments should always be performed when replacing the following components (marked with ◪ on the schematic diagram).

◪ on D board:
IC502, Q833, Q834, Q835, Q836, D835, D836, C519, C843, C844, C845, C846, C847, C848, RV833, R523, R850, R851, R852, R853, R854, R855, R856, R857, R858, R859, R861, R862, R863.
◪ on P board:NL801,T802 (FBT),C814.

1. Receive an entire white signal.
2. • CONTRAST.....Maximum
   • BRIGHTNESS .....Maximum
3. Connect a digital multimeter to the TP85 (CN503 pin-Ⓑ).
4. Confirm the voltage is 14.1 ± 3.0V DC.
5. Receive a dot signal.
6. Connect an ammeter between D board CN503 pin-Ⓑ and P board CN801 pin-Ⓑ.
7. Adjust BRIGHTNESS and CONTRAST so that the current is I_{ABL} = 160 ± 30 μA.
8. Apply an external DC voltage gradually to TP85. When the voltage becomes 18.5V ± 0.1V DC, confirm the HOLD-DOWN circuit operates immediately and raster disappears.
9. When external DC voltage at TP85 becomes 17.5V ± 0.1V DC, confirm the HOLD-DOWN circuit doesn't operate.
10. Receive an entire white signal.
11. Adjust with BRIGHTNESS and CONTRAST controls so that the current is I_{ABL} = 520 ± 30 μA.
12. Apply DC voltage of 17.8V ± 0.1V to TP85. Confirm the HOLD-DOWN circuit operates immediately and raster disappears.
13. With the same set-up as steps 10 and 11, supply 16.8V ± 0.1V DC to TP85. Confirm that the HOLD-DOWN circuit doesn't operate.
14. When above specifications are not satisfied, readjust RV833. After adjusting, fasten RV833 in place with epoxy.

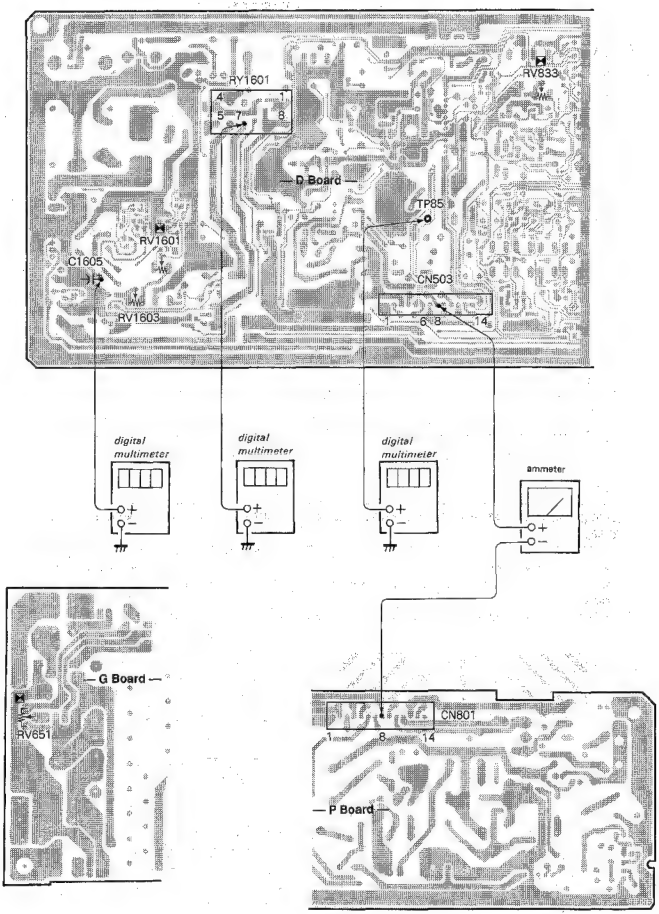
RV1601
4
5
7
8
RV833
D Board
TP85
RV1601
C1605
CN503
RV1603
1
8
14
digital multimeter
digital multimeter
digital multimeter
ammeter
G Board
RV651
CN801
1
8
14
P Board

SECTION 5
CIRCUIT ADJUSTMENTS

5-1. D BOARD ADJUSTMENTS

—D BOARD (COMPONENT SIDE)—

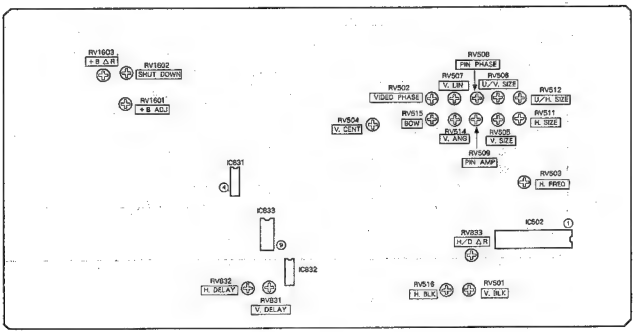

HORIZONTAL OSCILLATION FREQUENCY ADJUSTMENT (RV503)

1. Receive a monoscope signal.
2. Connect pin-① of IC502 to ground with 100μF/16V electrolytic capacitor.
3. Adjust RV503 (H.FREQ) so that the screen streaming to stops.



SCREEN PHASE ADJUSTMENTS (RV502, RV512, RV516)

1. Receive a monoscope signal.
2. Set U/S (Under Scan) switch to Under mode.
3. • CONTRAST ..... Minimum
   • BRIGHTNESS ..... Maximum.
4. Adjust RV512 (U/H. SIZE) so that the white frame of monoscope signal becomes visible.
5. Adjust RV516 (H.BLK) for minimum BLKG width so that all the deflection area becomes visible.
6. Adjust RV502 (VIDEO PHASE) so that the monoscope's white frames should have equal width.



H.V BLK ADJUSTMENTS (RV501,RV516)

1. Receive a monoscope signal.
2. Set U/S (Under Scan) switch to Under mode.
3. • CONTRAST ..... Minimum
   • BRIGHTNESS ..... Maximum.
4. V. BLK Adjustment (RV501)

(I) Adjust RV501(V. BLK) so that the upper side white frame of monoscope signal is not blanked.



5. H. BLK Adjustment (RV516)

(I) Adjust with RV516 (H. BLK) so that the left end white vertical line of the white frame of monoscope signal is not blanked as following figure.



VERTICAL DEFLECTION PART ADJUSTMENTS (RV504, RV505, RV506, RV507)

1. Receive a monoscope signal.
2. • CONTRAST 70%
   • BRIGHTNESS 50%
3. Adjust RV505 (V. SIZE) so that the vertical size of monoscope signal becomes 12 frames.



4. Adjust RV507 (V.LIN) the vertical linearity.



5. Adjust RV504 (V. CENT) the vertical position.



6. V. SIZE ADJUSTMENT (RV505)

(I) Adjust RV505 (V. SIZE) so that the vertical size of monoscope signal becomes 11.75 +0.2 frames.

7. V.SIZE IN UNDERSCAN MODE ADJUSTMENT (RV506)

(I) Set U/S (Under Scan) switch to Under mode.

(2) Adjust the Under V.SIZE with RV506 (U/V. SIZE) as follows.



HORIZONTAL DEFLECTION PART ADJUSTMENTS (RV508, RV509, RV511, RV514, RV515, RV801/P board)

1. Receive a monoscope signal.
2. • CONTRAST 70%
   • BRIGHTNESS 50%
3. H. CENT Adjustment (RV801 on P board)

(I) Adjust RV801 on P board (H. CENT) the horizontal position.



4. H. SIZE Adjustment (RV511)

(I) Adjust RV511 (H. SIZE) the horizontal size of 16 frames of monoscope signal.



5. PIN AMP, PIN PHASE, V. ANG, BOW ADJUSTMENTS (RV508 RV509, RV514, RV515)

Adjust RV514 (V. ANG) and RV515 (BOW) to correct vertical angular distortion and bow distortion. Adjust RV509 (PIN AMP) and RV508 (PIN PHASE) so that vertical lines become straight.

- V. ANG (RV514)

- BOW (RV515)

- PIN AMP (RV509)

- PIN PHASE (RV508)

6. H. SIZE ADJUSTMENT (RV511)

(1) Adjust RV511 (H. SIZE) so that the horizontal size becomes 16 ± 0.2 frames.

7. UNDERSCAN MODE H.SIZE ADJUSTMENT (RV512)

(1) Set U/S (Under Scan) switch to Under mode.

(2) Adjust RV512 (U/H. SIZE) the Under H. SIZE as shown in the figure.



H V DELAY ADJUSTMENT (RV831, RV832)

1. Receive a monoscope signal.
2. • CONTRAST 70%
   • BRIGHTNESS 50%
3. Set H V DELAY switch to DELAY mode.
4. H. DELAY Adjustment (RV832)

(1) Connect an oscilloscope to pin ④ of IC831.

(2) Adjust RV832 (H. DELAY) to becomes 41 ± 1 μsec.



5. V. DELAY Adjustment (RV831)

(1) Connect an oscilloscope to pin ⑨ of IC833.

(2) Adjust RV831 to become 8.0 ± 0.4msec as follows.



SHUT-DOWN VOLTAGE ADJUSTMENT (RV1602)

1. Fully rotate RV1602 in the direction that does not shut-down.
2. Supply a 9.4V $^{+0.1}_{-0}$V voltage to the C1602 side of L1602 on the D board.
3. Turn AC power switch ON.
4. Rotate D board RV1602 (SHT DOWN) slowly to the point that shuts-down the unit.

B+ VOLTAGE DURING DC OPERATE MODE, ADJUSTMENT (RV1601)

1. Supply DC12V±0.2V to DC 12V IN connector.
2. Receive a monoscope signal.
3. • CONTRAST 80%
   • BRIGHTNESS 50%
4. Connect a digital voltmeter to C1605 + positive side on D board.
5. Adjust RV1601 on the D board for 40.0±0.1V DC.

5-2. B BOARD ADJUSTMENTS

-B BOARD (COMPONENT SIDE)-

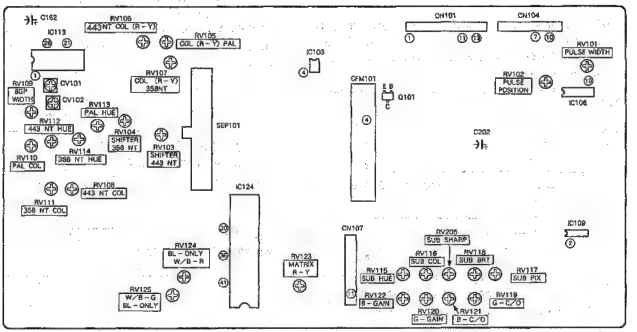

-B BOARD (CONDUCTOR SIDE)-

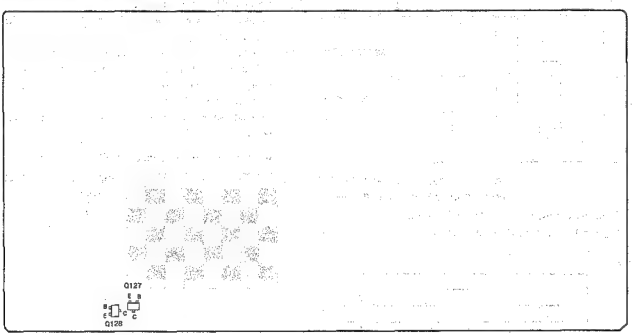

PRIMARY COLOR MATRIX ADJUSTMENT (RV115, RV116, RV123)

1. Supply component color bar signal (75% chroma color bar) to the equipment so that Y signal is supplied to EXT SYNC and R-Y signal to R-Y connectors. Operate the equipment in external sync mode.
2. Connect oscilloscope to IC124 pin-㉔ (B-OUT).
3. Adjust RV115 (SUB HUE) to obtain the Blue output as shown in figure.



4. Supply component color bar signal (75% color bar) to the component input connector to feed R-Y and B-Y signals. Operate the equipment in internal SYNC mode.
5. Connect oscilloscope to IC124 pin-㉚ (SUB-COL). Adjust RV116 (SUB-COL) so that waveform peaks should have the same level.



(Adjust so that the first and the 4th peaks should have the same level.)

6. Connect oscilloscope to IC124 pin-㊶ (R-OUT).
7. Adjust RV123 ((R-Y)-IN) so that waveform peaks should have the same level.



BURST GATE PULSE WIDTH ADJUSTMENT (RV109)

1. Receive color bar signal.
2. Connect dual trace oscilloscope to CN104 connector pin-⑩ (COMP-SYNC) and IC113 (M51279) pin-① (BGP-WIDTH). Adjust RV109 (BGP-WIDTH) to obtain the relationship as shown in the figure.



VXO ADJUSTMENT (CV101,CV102)

1. 3.58MHz VXO adjustment (CV101)

(1) Receive NTSC color bar signal.
(2) Connect +5V power line to IC113 pin-㉘ (ID-FILT-REF) via a 4700Ω resistor.
(3) Ground IC109 pin-② by connecting it to ground.
(4) Ground C162 – negative side by connecting it to ground.
(5) Connect frequency counter to IC113 pin-㉑. Adjust CV101 (358FO) for 3579545±20Hz.
(This adjustment can be alternatively done by observing screen as below.)

Adjust color synchronization by CV101 (358FO).



Adjust so that color stripes disappear and the hue change is stabilized extremely.

2. 4.43MHz VXO adjustment (CV102)
(1) Receive PAL colour bar signal.
(2) Connect +12V power line to IC109 pin-②.
(3) Connect frequency counter to IC113 pin-㉑. Adjust CV102 (443FO) for 4433619±20Hz.
(This adjustment can be alternatively done by observing screen as below.)

Adjust colour synchronization by CV102(443FO).



Adjust so that colour stripes disappear and the hue change is stabilized extremely.

NTSC COMB FILTER ADJUSTMENT (RV1,T1/CFM101 BOARD)

1. Receive NTSC 3.58 color bar signal.
2. Connect an oscilloscope to C202 – negative side.
3. Confirm the Y OUT is 0.78±0.5 Vp p.
4. Confirm the residual chroma is 32 mVp-p below. If it is above 35 mVp p, adjust with RV1 and T1 on CFM201 board while tracking.



NTSC COLOR DEMODULATION ADJUSTMENT (RV114,RV111,RV104,RV107)

1. NTSC 3.58MHz - HUE adjustment (RV114)
(1) Supply NTSC color bar signal including burst and R-Y component. (For example, Tektronix 1410SG output color bar signal with B-Y component removed.)
(2) Connect an oscilloscope to Q128 emitter (B-Y OUT).
(3) Adjust RV114 (358NT - HUE) so that all the waveform peaks should have equal amplitude (look flat) except burst. (Level difference should be less than 10mV p-p.)

2. NTSC 3.58MHz - COLOR adjustment (RV111)
(1) Receive NTSC 3.58 color bar signal.
(2) Connect an oscilloscope to IC124 pin-㉚ (B-OUT).
(3) Adjust RV111(358NT-COL) so that waveform peaks should have the same level (most flat).



3. NTSC 3.58MHz - COLOR (R-Y) adjustment (RV104, RV107)
(1) Receive the color bar signal.
(2) Connect an oscilloscope to the Q127 emitter (R-Y OUT), and adjust RV104 (358NT-SHIFT) so that the output of the burst section (B-Y axis signal output) becomes 0.
(3) Connect an oscilloscope to IC124 pin-㉛ (R-OUT). Adjust RV107 (358NT-COL (R-Y)) so that the level difference should be minimum.



NTSC 4.43MHZ COLOR DEMODULATION ADJUSTMENT (RV108,RV112,RV103,RV106)

1. NTSC 4.43MHz - COLOR adjustment (RV108,RV112)
(1) Receive NTSC 4.43 color bar signal (75% color bar).
(2) Connect an oscilloscope to IC124 pin-㉜ (B-OUT).
(3) Adjust RV108 (443NT-COL) so that waveform peaks should have the same level (most flat).

(4) When cyan and magenta have level difference, adjust RV112 (443NT-HUE) and RV108 (443NT-COL) alternatively to remove, by tracking.



2. NTSC 4.43MHz - COLOR (R-Y) adjustment (RV103, RV106)
(1) Receive the NTSC 4.43 color bar signal (75%, chroma color bar).
(2) Connect an oscilloscope to the Q127 emitter (R-Y OUT), and adjust RV103(443NT-SHIFT) so that the output of the burst section (B-Y axis signal output) becomes 0.
(3) Connect an oscilloscope to IC124 pin-㊶ (R-OUT). Adjust RV106 (443NT-COL (R-Y)) so that the level difference should be minimum.



(Adjust for B=D. [less than 20mV] Also level difference between B and C should be less than 60mV.)

PAL COLOR DEMODULATION ADJUSTMENT (RV113,RV2/SEP101, RV110,RV105,RV205)

1. PAL PHASE Adjustment (RV113,RV2/SEP101)
(1) Receive the special PAL color-bar.
(2) Connect an oscilloscope to emitter of Q127 (R-Y OUT).
(3) Adjust RV113 (PAL-PHASE) so that B-Y (0/180°) anti-PAL portion (in the R-Y demodulated output) becomes "0" (flat) as following figure.



(4) Connect an oscilloscope to emitter of Q128 (B-Y OUT).
(5) Adjust RV2 inside SEP101 so that R-Y (90°/90°) anti-PAL portion (in B-Y demodulated output) becomes "0" (flat) as following figure.



(For the adjustments of (3) and (5), it is also possible to set the color level to MAX with the chroma adjusting knob of the unit and erase the color of the anti-pal signal section.)

2. PAL COLOR ADJUSTMENT (RV110)
(1) Receive PAL color bar signal (75% color bar).
(2) Connect an oscilloscope to IC124 pin-㊱ (B-OUT).
(3) Adjust RV110 (PAL-COL) so that waveform peaks should have the same level (most flat).



3. PAL-COLOR-(R-Y) ADJUSTMENT (RV105)
(1) Connect an oscilloscope to IC124 pin-㊶ (R-OUT).
(2) Adjust RV105 (PAL-COL-(R-Y)) so that waveform peaks should have the same level (most flat).



(Adjust for B=D. [less than 20mV] Also level difference between B and C should be less than 60mV.)

SUB-SHARP ADJUSTMENT (RV205)

(1) Receive a sweep signal (or multi-burst).
* • Bandwidth should be more than 10MHz (flat).
  • Composite sync should be included.
  • Turn burst off.
(2) Connect an oscilloscope to IC124 pin-㊳ (G-OUT).
(3) Adjust RV205 (SUB-SHARP) as shown.

Example of sweep signal output waveform

[specification]
6MHz/0.5MHz=0±0.5dB

CHROMA H PULSE POSITION ADJUSTMENT (RV101,RV102)

(1) Receive the SECAM color bar signal.
(The left edge of the screen should not be colored.)
(2) Set to the under-scan mode.
(3) Adjust RV101 (PLUSE-WIDTH) until the point immediately before the color on the left edge of the screen disappears.
(4) Release the under-scan mode.
(5) Set the HV DELAY mode.
(6) Adjust RV102 (PULSE-POSI) untill the point immediately before the rising color of the image after back porch diappears.

Note : If image phase adjustment or HV DELAY amount adjustment during HV DELAY is performed after completing the adjustment in this section, re-adjustments will be required. Therefore, performed this adjustment after the two mentioned have been performed.

5-3. S BOARD ADJSUTMENTS

—S BOARD (COMPONENT SIDE)—



SECAM (T1101,L1102,L1103)

1. Receive SECAM color-bar.
2. Bell Filter Adjustment (T1101)

(1) Connect an oscilloscope to IC1101 pin-㉔.

(2) Adjust T1101 (Bell Filter) so that the chroma waveform becomes smooth. (Uneven level should be minimum.)



3. Color Balance Adjustment (L1102,L1103)

(1) Connect an oscilloscope to pin-⑨ (R-Y) of CN1101 connector.

(2) Adjust L1102 (R-Y) so that the non-colored portion level becomes flat.



(3) Connect an oscilloscope to pin-⑧ (B-Y) of CN1101 connector.

(4) Adjust L1103 (B-Y) so that the non-colored portion level becomes flat.

(5) When adjusting the color level of the unit to MAX or MIN using the chroma adjusting knob, check that the white balance of the colorless section does not change.

DEMODULATION LEVEL ADJUSTMENT (RV1101,RV1102)

1. Receive SECAM color-bar.
2. Connect an oscilloscope to IC124 pin-㉜ (B-OUT).
3. Adjust S board RV1101 (SEC-COL) so that waveform peaks should have the same level (most flat).



4. Connect an oscilloscope to IC124 pin-㊶ (R-OUT).
5. Adjust S board RV1102 (SEC-COL (R-Y)) so that the level difference should be minimum.



(Adjust for B=D. [less than 20mV] Also level difference between B and C should be less than 60mV.)

SECTION 6
DIAGRAMS

6-1. FRAME SCHEMATIC DIAGRAM

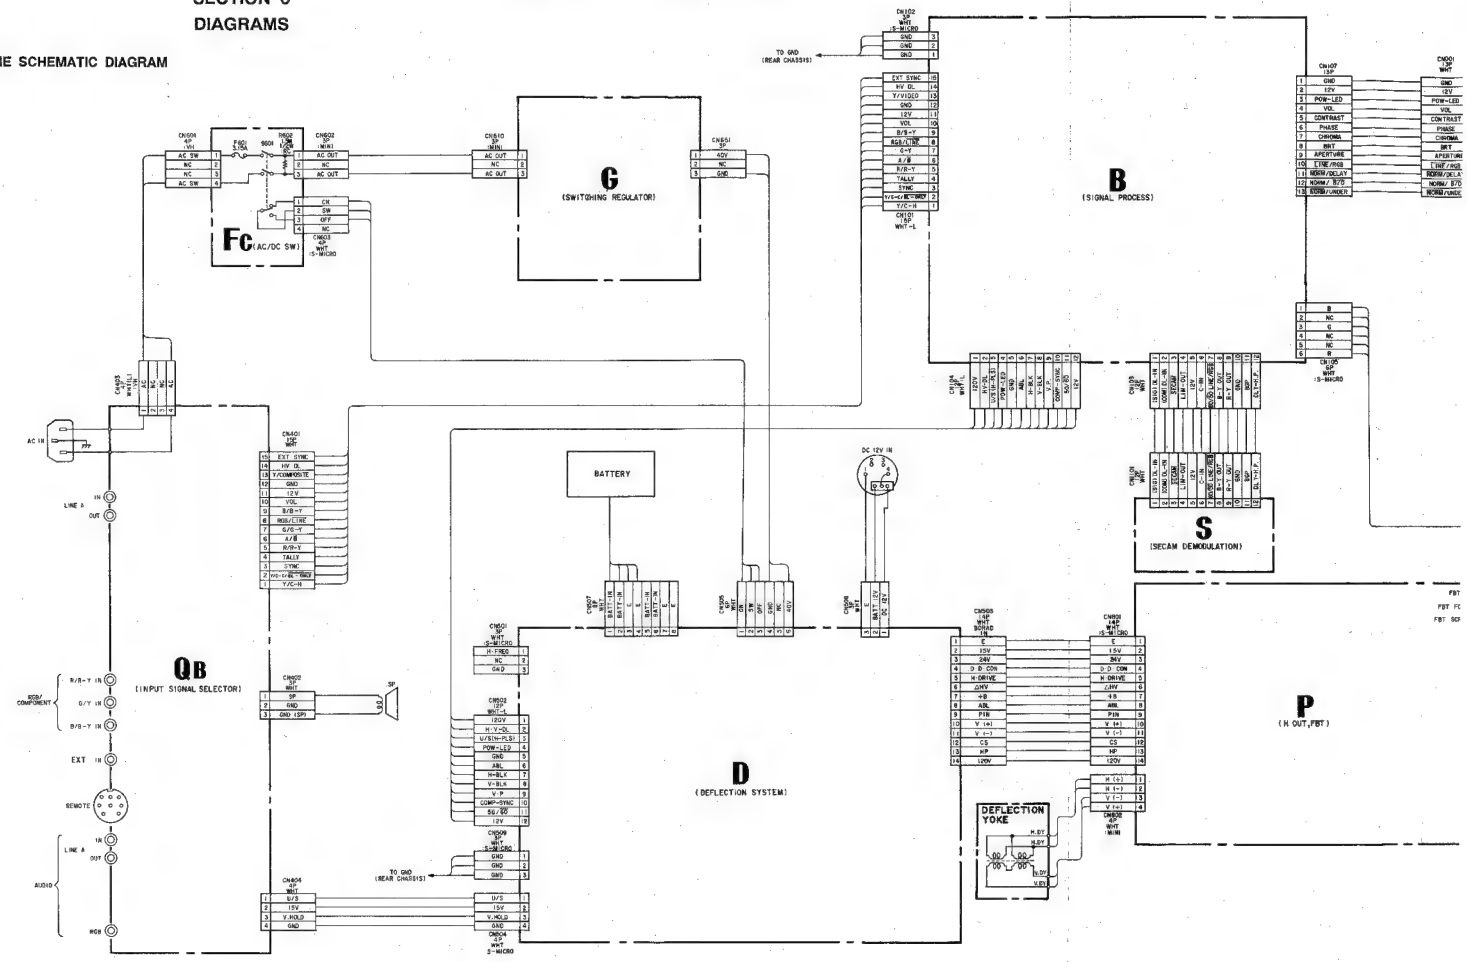

PVM-6041QM

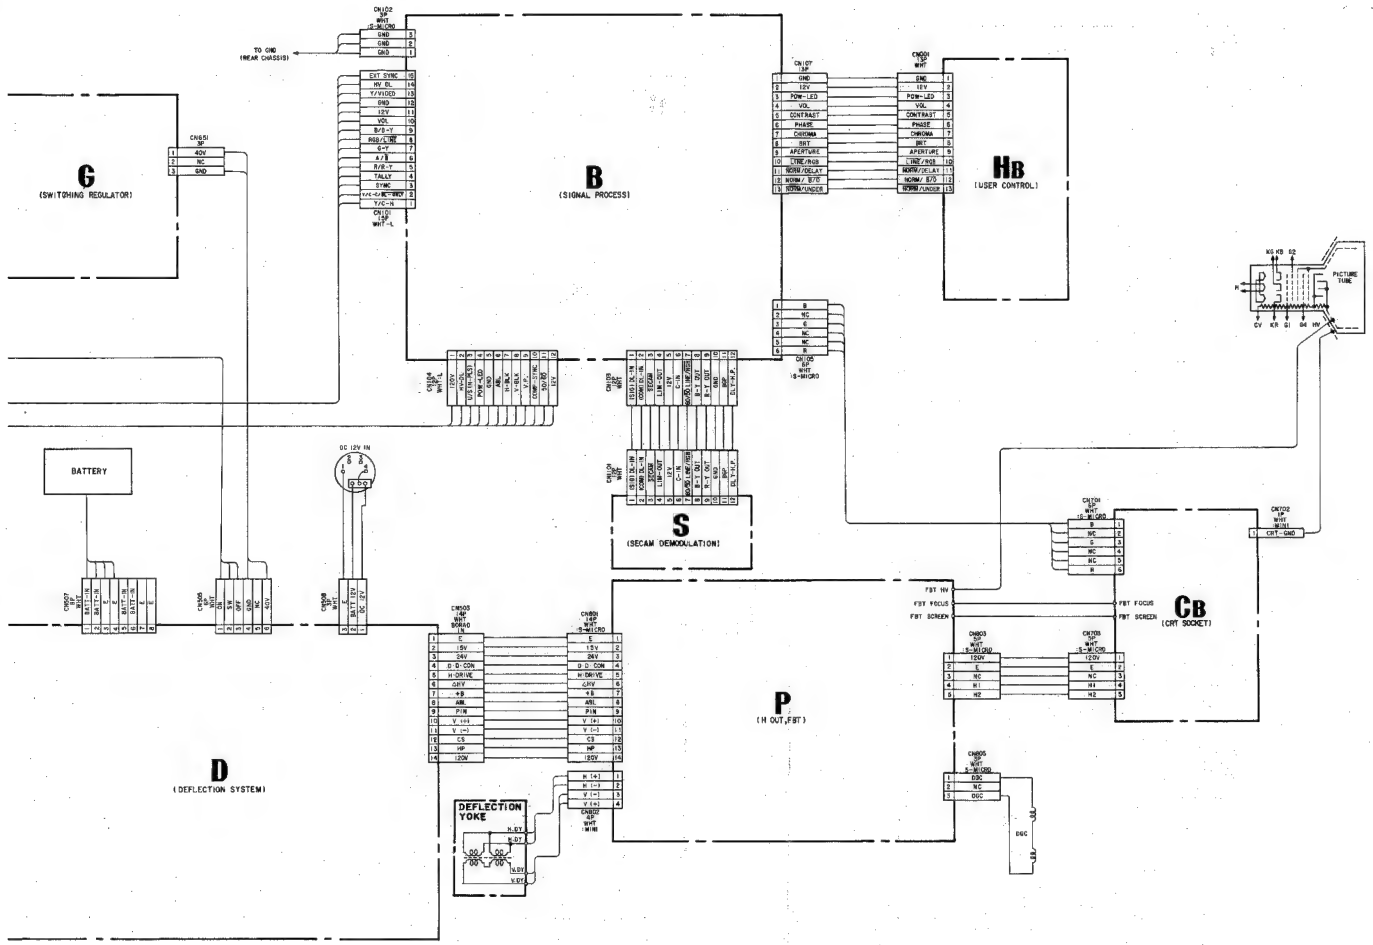
G
(SWITCHING REGULATOR)
B
(SIGNAL PROCESS)
HB
(USER CONTROL)
S
(SECAM DEMODULATION)
P
(H OUT,FBT)
CB
(CRT SOCKET)
D
(DEFLECTION SYSTEM)
BATTERY
DC 12V IN
DEFLECTION YOKE
TO GND (REAR CHASSIS)
PICTURE TUNE
FBT HV
FBT FOCUS
FBT SCREEN
CRT-GND

6-2. BLOCK DIAGRAM (1)

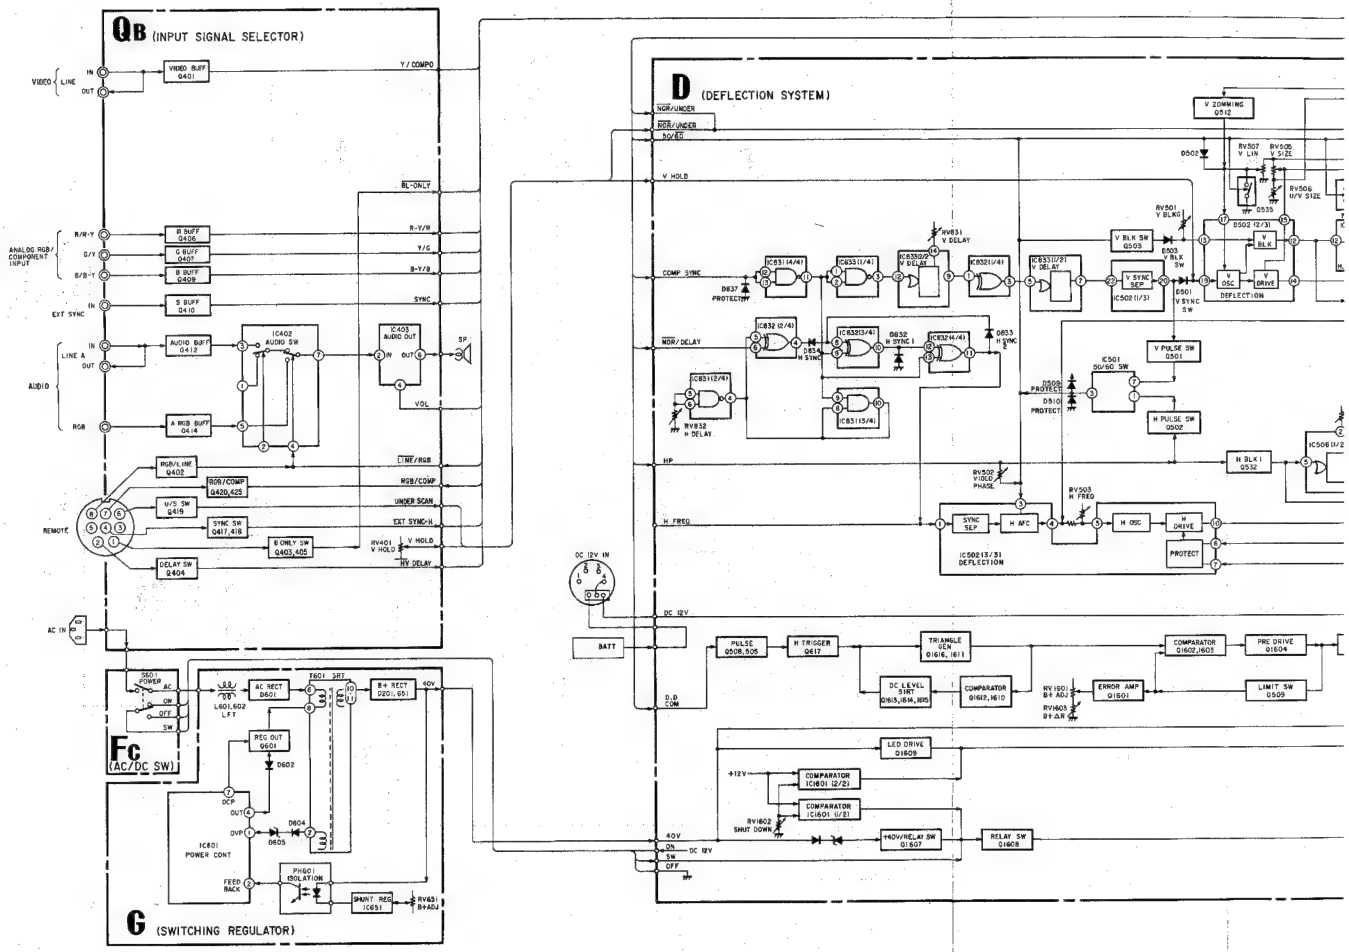

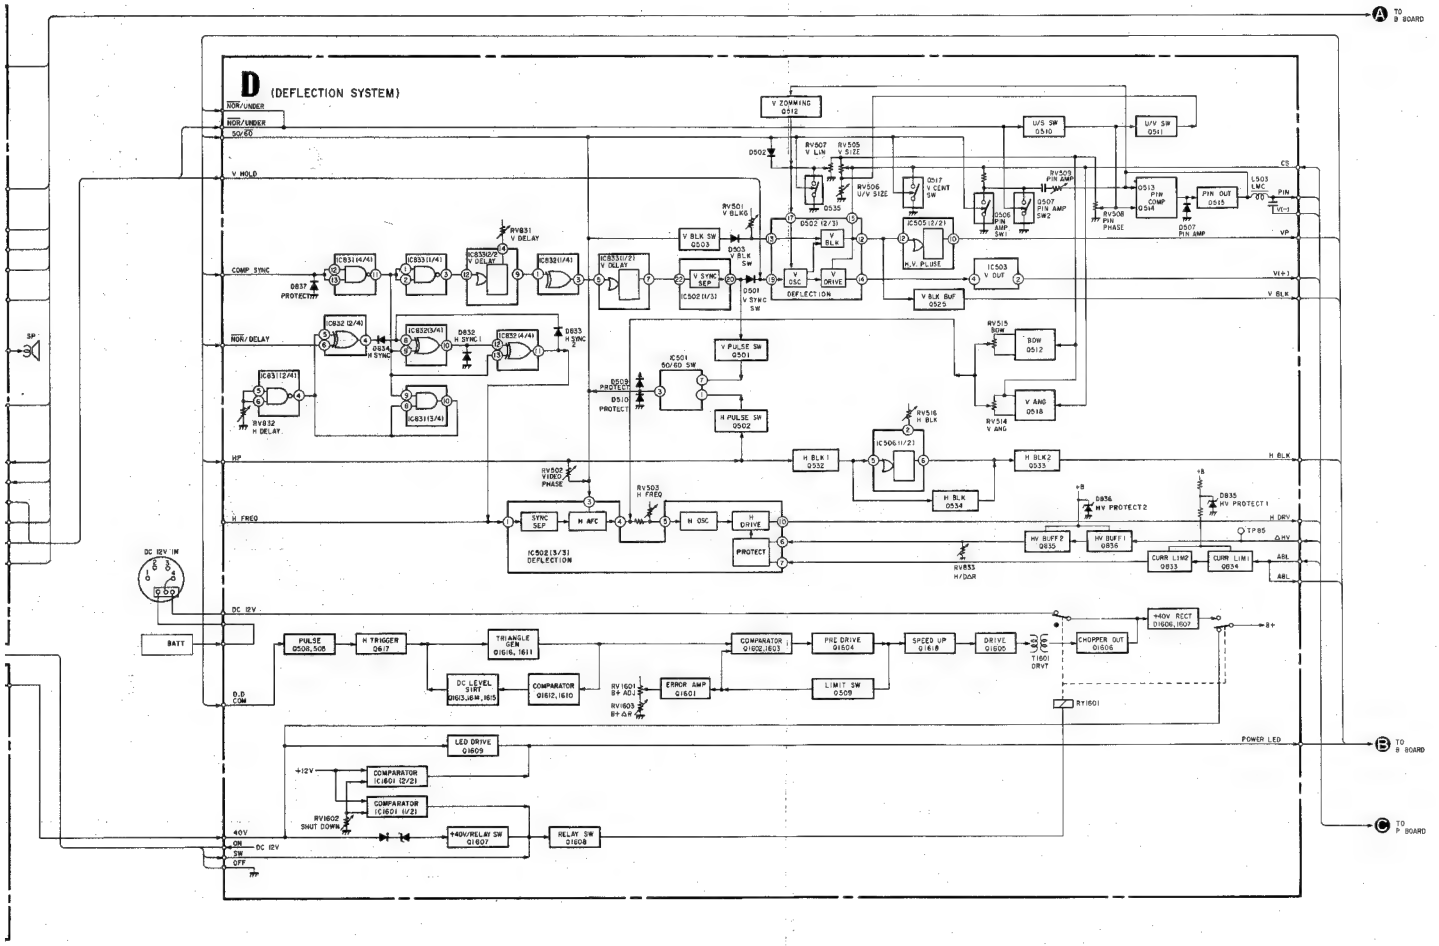
D (DEFLECTION SYSTEM)
NOR/UNDER
50/60
V HOLD
COMP SYNC
NOR/DELAY
HP
H FREQ
DC 12V
D.D COM
40V
ON
SW
OFF
DC 12V IN
BATT
SP
V ZOMMING Q512
UVS SW Q510
UVI SW Q511
V BLK SW Q503
V SYNC SEP IC502(1/3)
V OSC
V DRIVE
DEFLECTION
V BLK BUF Q525
V PULSE SW Q501
H PULSE SW Q502
H BLK 1 Q532
H BLK 2 Q533
H BLK Q534
SYNC SEP
H AFC
H OSC
H DRIVE
PROTECT
IC502(3/3) DEFLECTION
BOW Q512
V AMP Q518
PIN COMP Q514
PIN OUT Q515
HV BUFF 2 Q835
HV BUFF 1 Q836
CURR LIM2 Q833
CURR LIM1 Q834
PULSE Q508,509
H TRIGGER Q617
TRIANGLE GEN Q1616,1611
DC LEVEL SHIFT Q1613,1614,1615
COMPARATOR Q1612,1610
ERROR AMP Q1601
COMPARATOR Q1602,1603
PRE DRIVE Q1604
SPEED UP Q1618
DRIVE Q1605
LIMIT SW Q509
CHOPPER OUT Q1606
+40V RECT Q1606,1607
RY1601
LED DRIVE Q1609
COMPARATOR IC1601 (2/2)
COMPARATOR IC1601 (1/2)
+40V/RELAY SW Q1607
RELAY SW Q1608
POWER LED
TO P BOARD
TO B BOARD
TO P BOARD

6-3. BLOCK DIAGRAM (2)

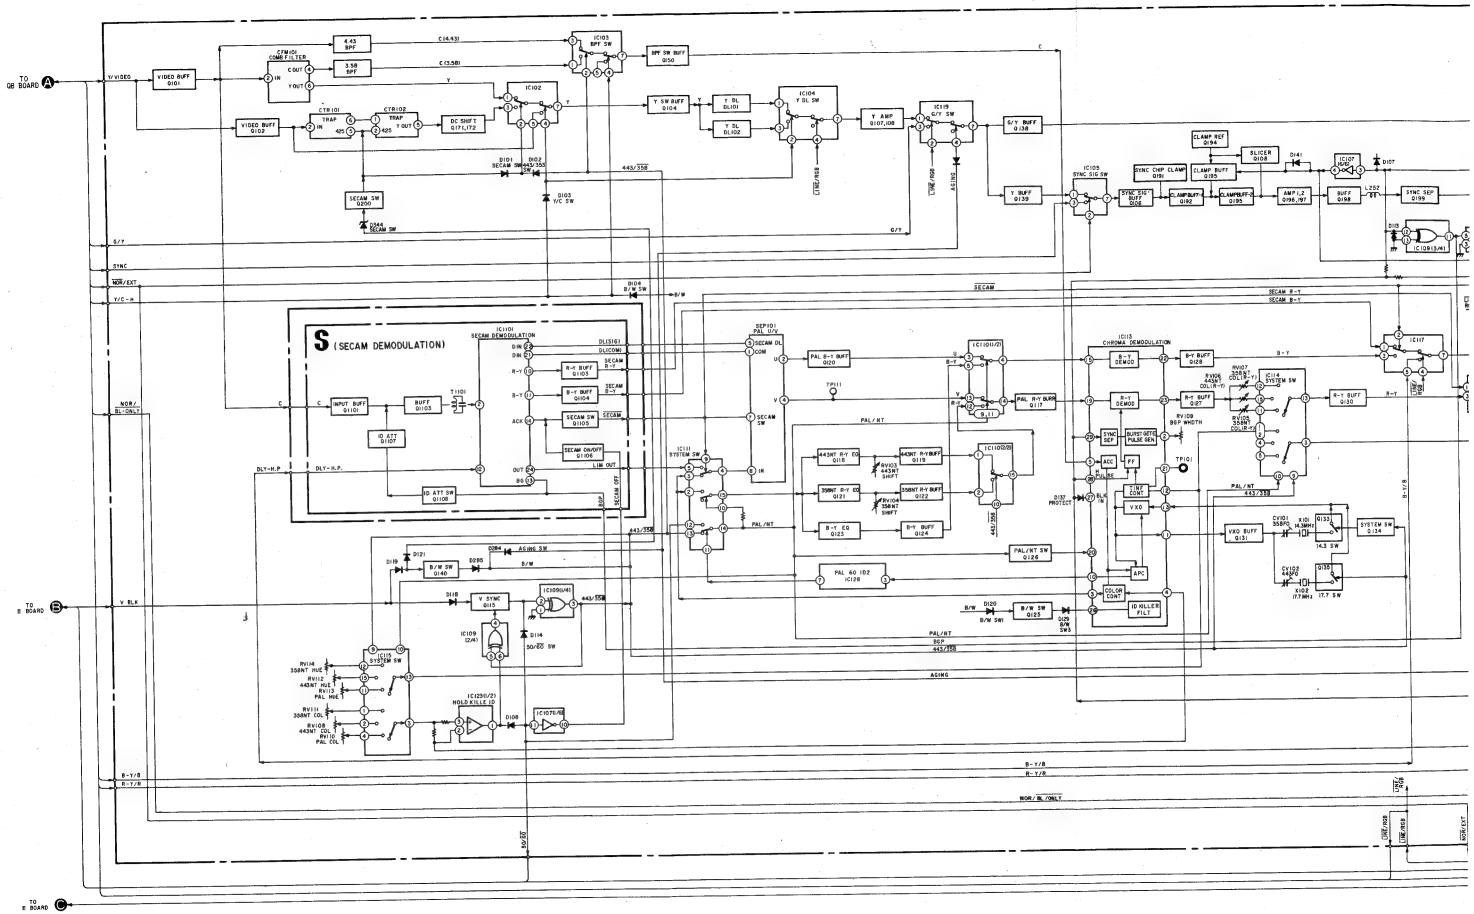

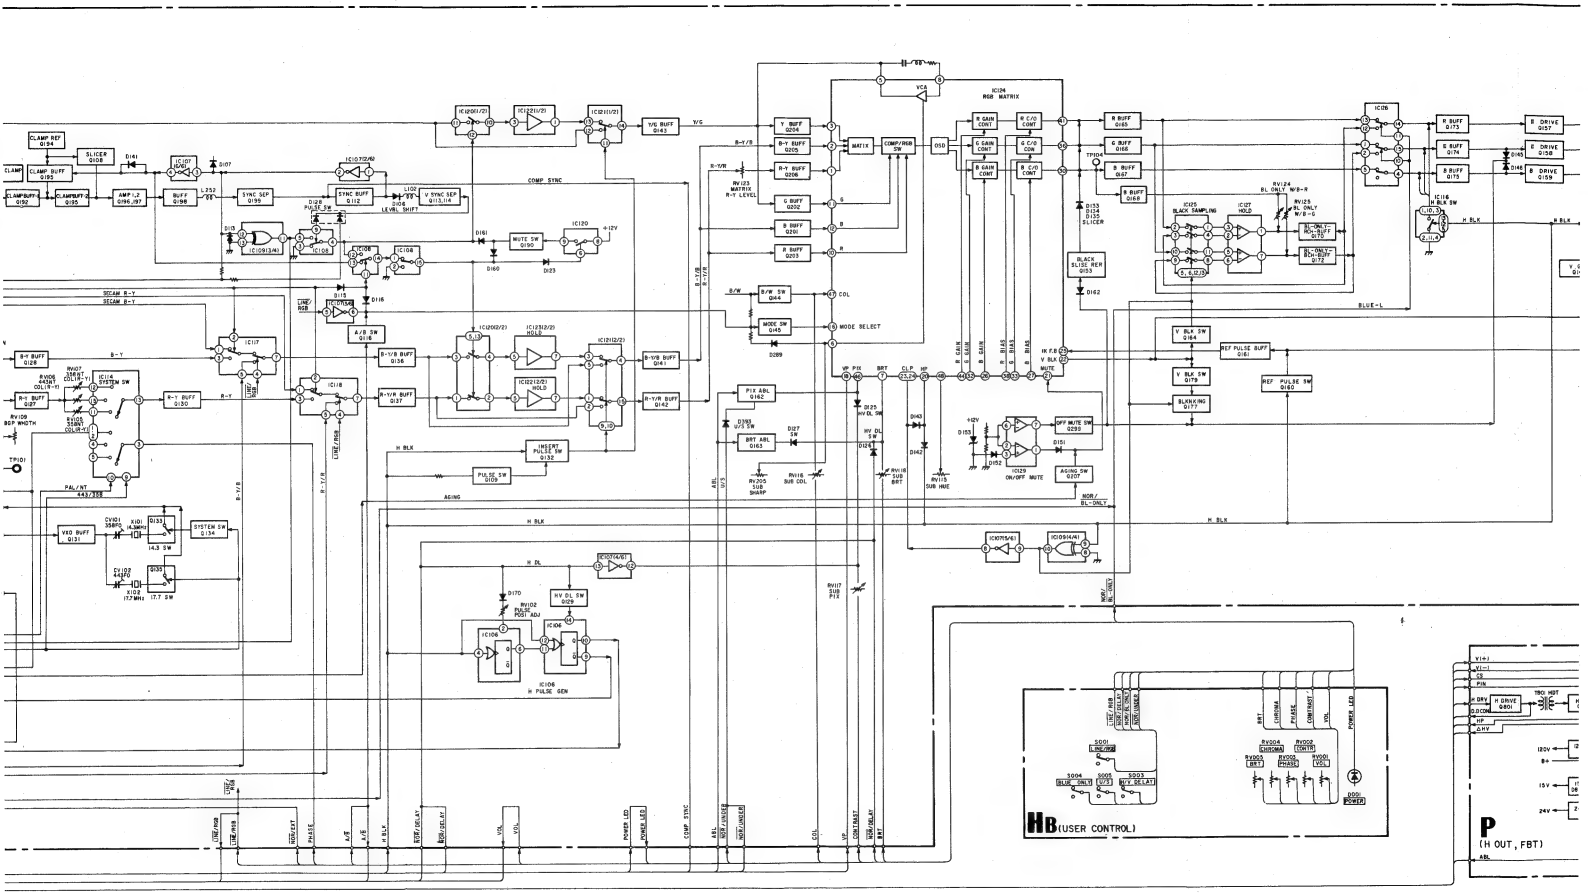
CLAMP REF Q194
SLICER Q108
CLAMP BUFF Q195
CLAMP BUFF Q192
AMP Q196,197
BUFF Q198
SYNC SEP Q199
SYNC BUFF Q112
V SYNC SEP Q113,114
COMP SYNC
MUTE SW Q190
SECAM B-Y
SECAM R-Y
A/B SW Q116
B-Y BUFF Q128
R-Y BUFF Q127
SYSTEM SW Q134
VCO BUFF Q131
14.3 SW
17.7 SW
B-Y/B BUFF Q136
R-Y/R BUFF Q137
B-Y/B BUFF Q161
R-Y/R BUFF Q162
INSERT PULSE SW Q132
PULSE SW Q109
H BLK
AGING
Y BUFF Q204
B-Y BUFF Q205
R-Y BUFF Q206
G BUFF Q202
B BUFF Q201
R BUFF Q203
MATRIX
COMP/RGB SW
B/W SW Q144
MODE SW Q145
MODE SELECT
PIX ABL Q162
BRT ABL Q163
H DL
H PULSE GEN
IC124 RGB MATRIX
R GAIN CONT
G GAIN CONT
B GAIN CONT
R C/O CONT
G C/O CONT
B C/O CONT
R BUFF Q165
G BUFF Q166
B BUFF Q167
BLACK SLICE REF Q153
IC125 BLACK SAMPLING
IC127 HOLD
BL ONLY R/B-R
BL ONLY R/B-G
V BLK SW Q164
BLANKING Q177
REF PULSE BUFF Q161
REF PULSE SW Q160
OFF MUTE SW Q299
IC129 ON/OFF MUTE
AGING SW Q207
NOR/BL-ONLY
BLUE-L
R BUFF Q173
G BUFF Q174
B BUFF Q175
B DRIVE Q157
B DRIVE Q158
B DRIVE Q159
IC116 H BLK SW
H BLK
SD01 LINE/RGB
SD02 NOR/BL-ONLY
SD03 BLY DELAY
SD04 BLUE ONLY
SD05 V/S
RV204 CONTRAST
RV202 PHASE
RV201 BRT
RV203 VOL
POWER LED
HB (USER CONTROL)
H DRIVE Q801
P
(H OUT, FBT)
ABL

PVM-6041QM

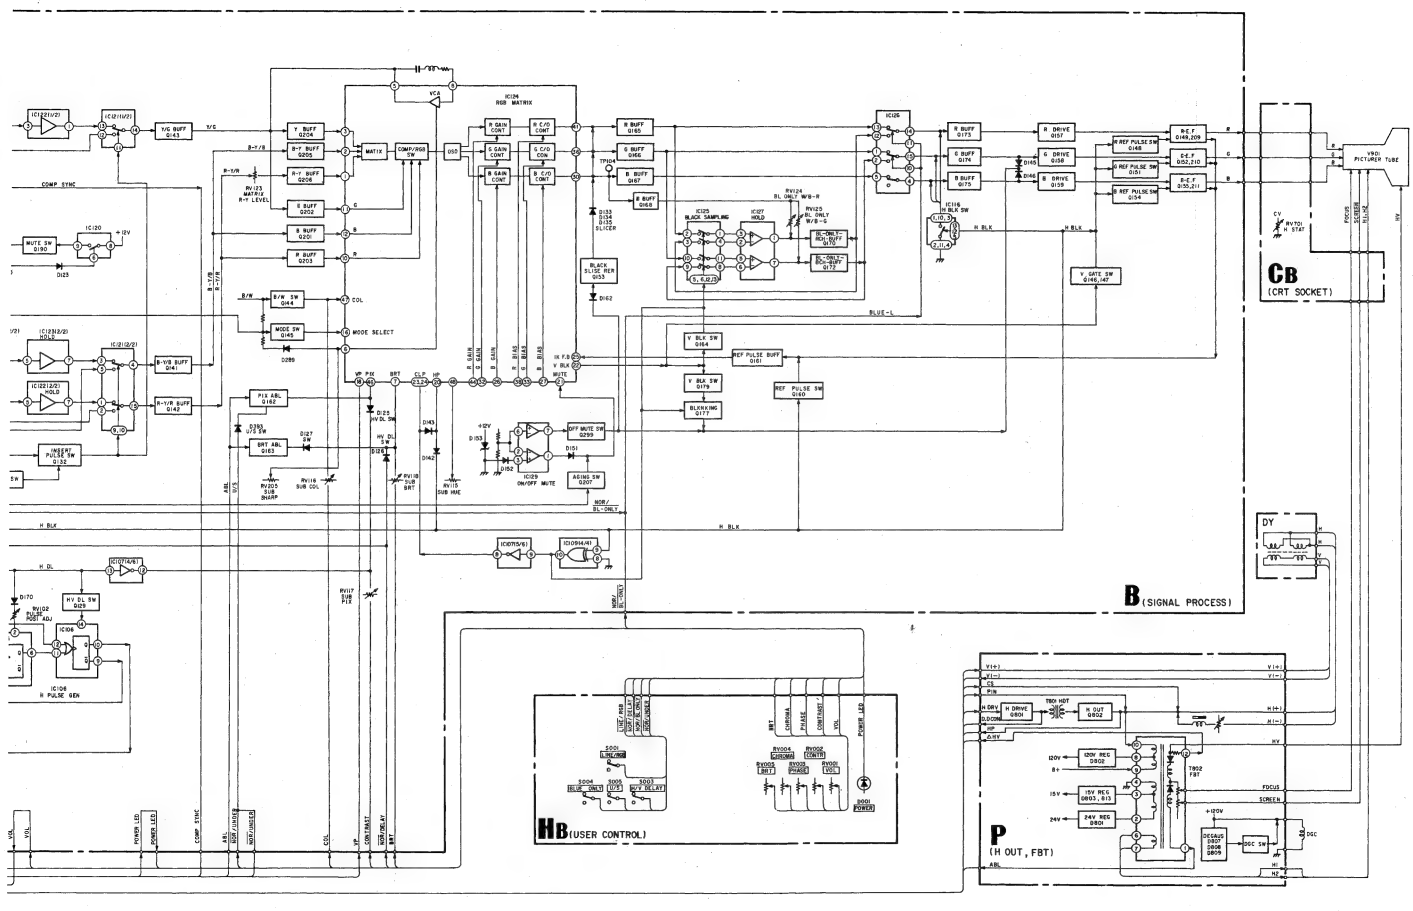
CB
(CRT SOCKET)
B
(SIGNAL PROCESS)
HB
(USER CONTROL)
P
(H OUT, FBT)
DY
VRD1
PICTURE TUBE
IC124
RGB MATRIX
IC125
IC126
IC116
IC120
IC104
H PULSE GEN
IC109
ON/OFF MUTE
IC075/61
IC094/41
IC106
MATRIX
COMP/PDS SW
OSD
BLACK SAMPLING
BLACK SLISE RER
MODE SELECT
MUTE SW
MODE SW
B/W SW
PIX ABL
BRT ABL
SUB BRIGHT
SUB COL
SUB BRT
SUB HUE
SUB PIX
HV DL SW
HV SL SW
PULSE POST ADJ
INSERT PULSE SW
AGING SW
OFF MUTE SW
REF PULSE SW
REF PULSE BUFF
V BLK SW
V BLK
BLANKING
V GATE SW
H BLK
H DL
BLUE-L
POWER LED
COMP SYNC
COL
CONTRAST
BRT
CHROMA
PHASE
VOL
POWER
H DRIVE
H OUT
120V REG
15V REG
24V REG
DEGAUSS
DGC SW
FBT
FOCUS
SCREEN
DGC
ABL
HS
HV

6-4. CIRCUIT BOARDS LOCATION

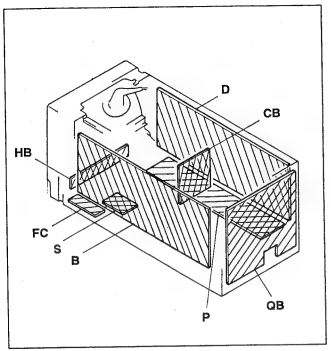

6-5. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50 WV or less are not indicated except for electrolytics.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm Rating electrical power ¼ W

- All resistors are in ohms.
- ▭ : nonflammable resistor.
- ⌇ : fusible resistor.
- △ : internal component.
- ▭ : panel designation.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- The components identified by ⊠ in this basic schematic diagram have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.
- When replacing components identified by ◪, make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by ⊠ and repeat the adjustment until the specified value is achieved. (Refer to RV651, RV1603, and RV833 adjust on page 18 and 19.)
- When replacing the part in below table be sure to perform the related adjustment.

Part replaced (◪)	Adjustment (⊠)
IC601, IC651, PH602, C654, R653, R655, R656, R657, RV651	RV651 (B+ MAX)
Q1601, Q1602, Q1603, D1601, D1602, D1603, D1604, D1605, C1601, C1602, R1601, R1602, R1603, R1604, R1605, R1606, R1607, R1608, R1628, R1629, R1630, RV1601, RV1603	RV1603 (B+ MAX IN DC POWER INPUT MODE)
IC502, Q833, Q834, Q835, Q836, D835, D836, C519, C814, C843, C844, C845, C846, C847, C848, RV833, R523, R850, R851, R852, R853, R854, R855, R856, R857, R858, R859, R861, R862, R863, NL801	R833 (HOLD-DOWN)

- All voltages are in V.
- Voltage are dc with respect to groundunless otherwise noted.
- Readings are taken with a color-bar signal input.
- Readings are taken with a PAL color-bar signal input.
- ▭ : adjustment for repair.
- Voltage variations may be noted due to normal production tolerance.
- ▬▬ : B + bus.
- ▬ ▬ : B − bus.
- ▒▒▒ : signal path.
- No mark: with PAL color-bar signal received or common voltage.
- ( ) : with SECAM color-bar signal received.
- < > : with NTSC 3.58 color-bar signal received.
- ⟨⟨ ⟩⟩ : with NTSC 4.43 color-bar signal received.
- [ ] : with S(Y/C) color-bar signal received.
- { } : with analog RGB color-bar signal received.
- ≪ ≫ : with component color-bar signal received.
- ※ : measurement impossibility

Reference information

RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RS	NONFLAMMABLE WIREWOUND
	: RB	NONFLAMMABLE CEMENT
COIL	: LF-8L	MICRO INDUCTOR
CAPACITOR	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE

P [H OUT, FBT] G [SWITCHING REGULATOR] S [SECAM DEMODULATION] Fc [AC/DC SWITCH] HB [USER CONTI

– P Board –

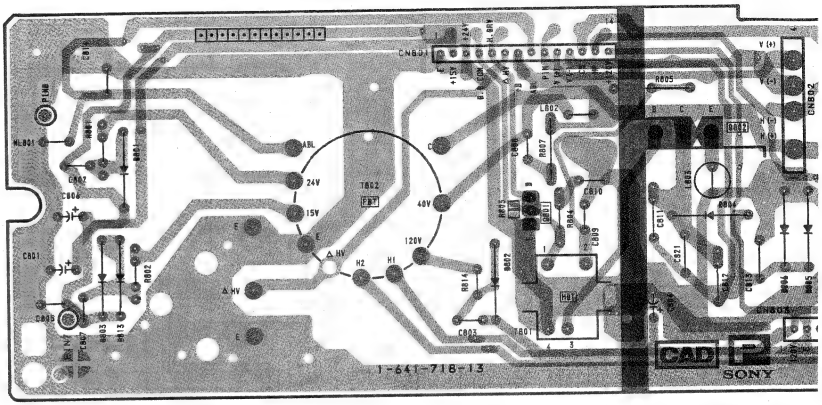

– G Board –

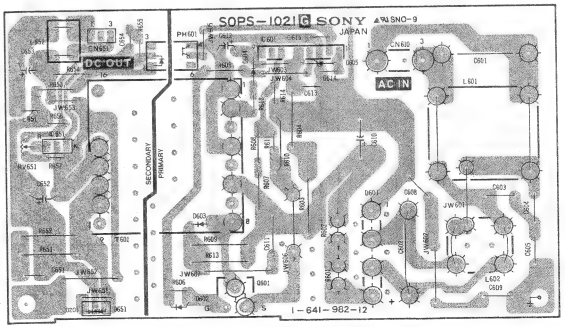

– FC Board –



ECAM DEMODULATION] **Fc** [AC/DC SWITCH] **HB** [USER CONTROL]

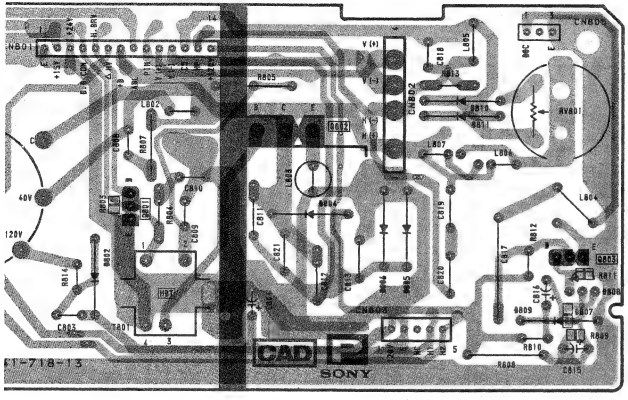



– FC Board –

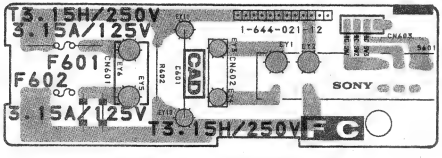

– HB Board –

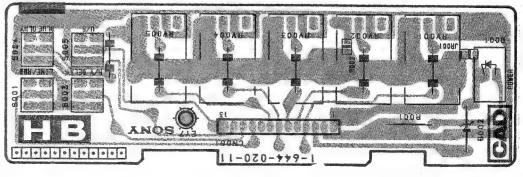

QB [INPUT SIGNAL SE

– S Board – – Conductor Side –



– S Board – – Component Side –



– QB Board –

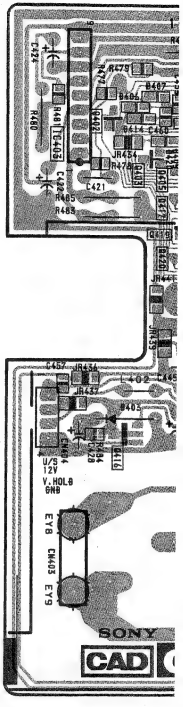

QB [INPUT SIGNAL SELECTOR]

– S Board – – Conductor Side –



– S Board – – Component Side –



– QB Board –

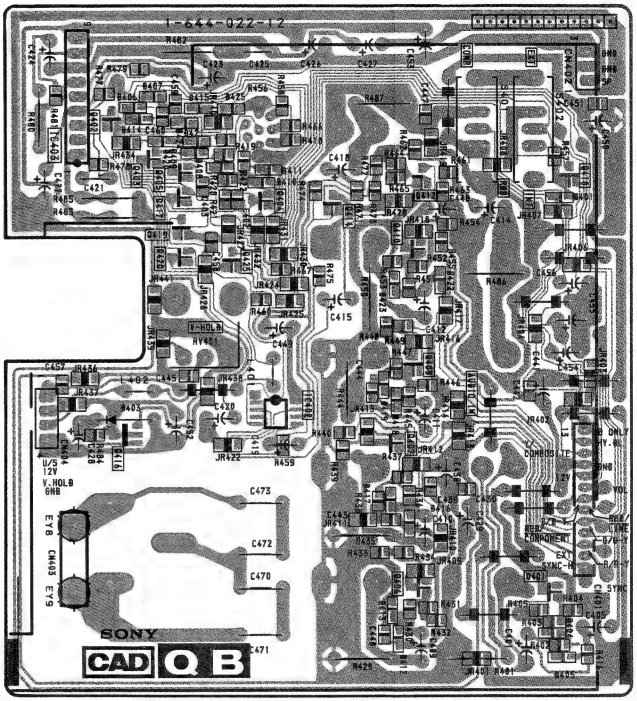

– HB Board –

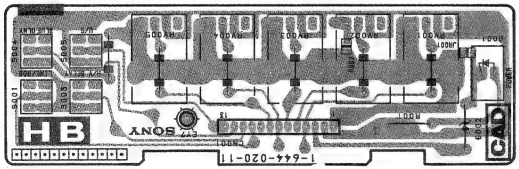

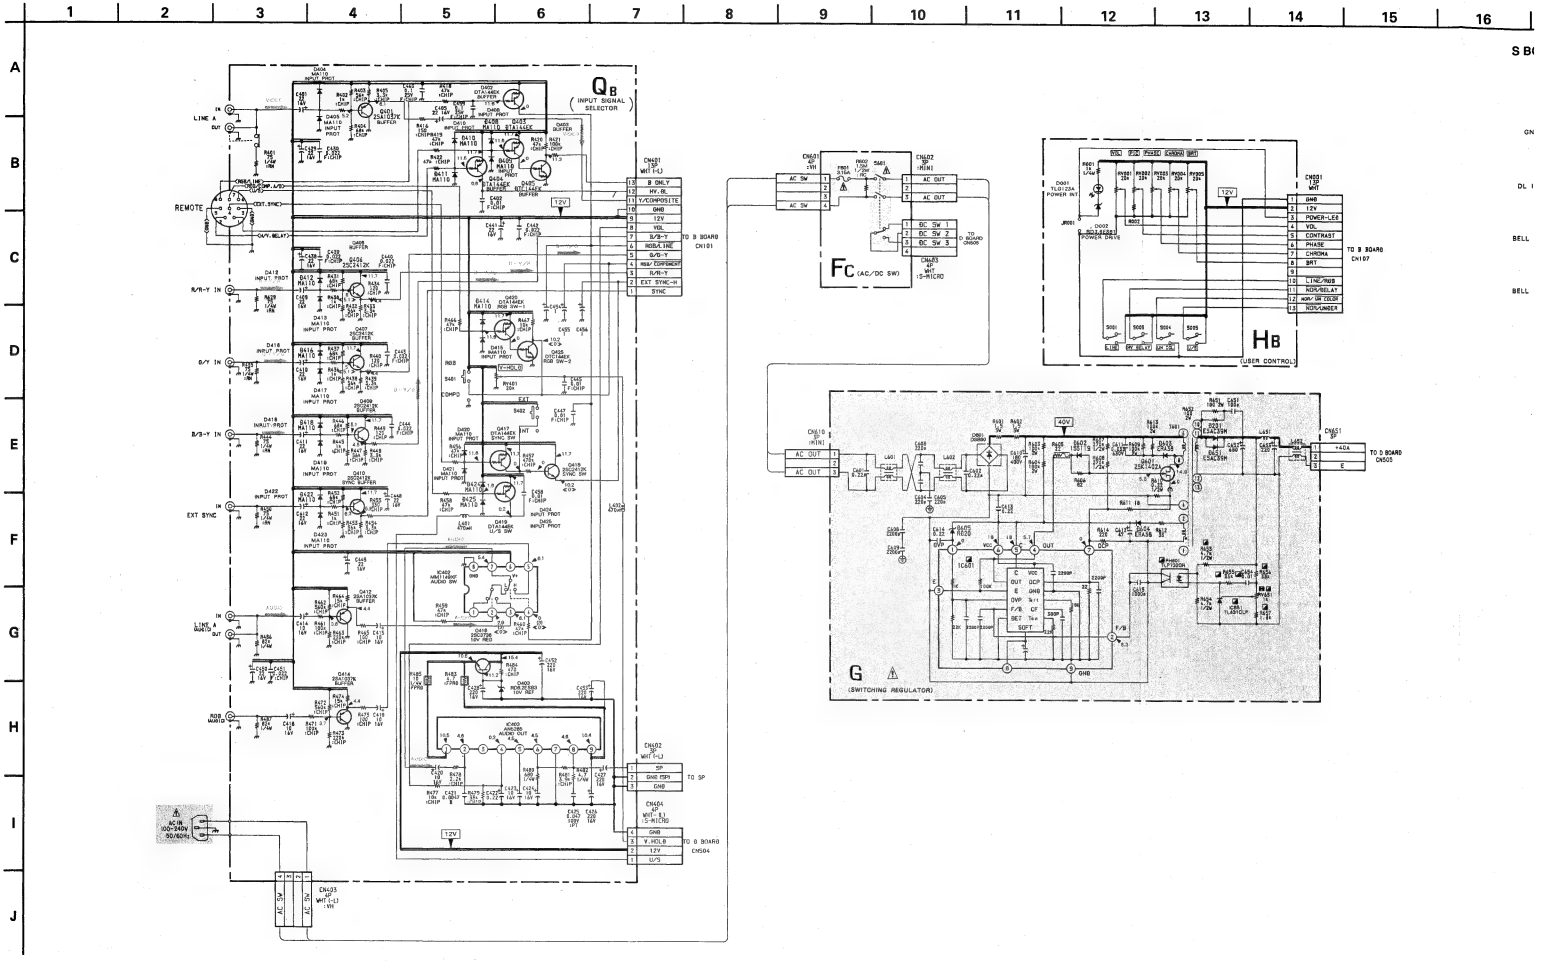
QB
(INPUT SIGNAL SELECTOR)
FC (AC/DC SW)
HB
(USER CONTROLS)
G
(SWITCHING REGULATOR)
REMOTE
LINE A IN
B/R-Y IN
G/Y IN
B/B-Y IN
EXT SYNC
LINE B IN
R/B MATRIX
AC IN 100-240V 50/60Hz
TO B BOARD CN101
TO B BOARD CN107
TO B BOARD CN604
TO B BOARD CN605
TO SP
12V
+4DA
E

S BOARD IC1101 CXA1214P

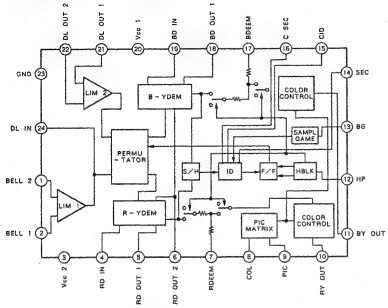

QB BOARD IC403 AN5265



P BOARD WAVEFORMS



S BOARD WAVEFORMS

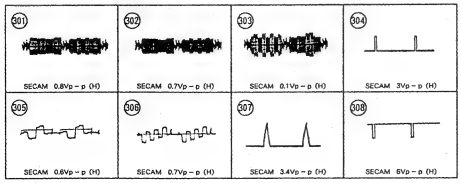

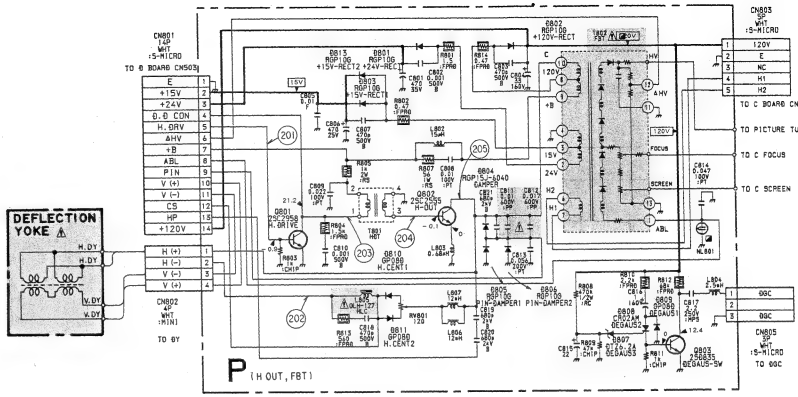

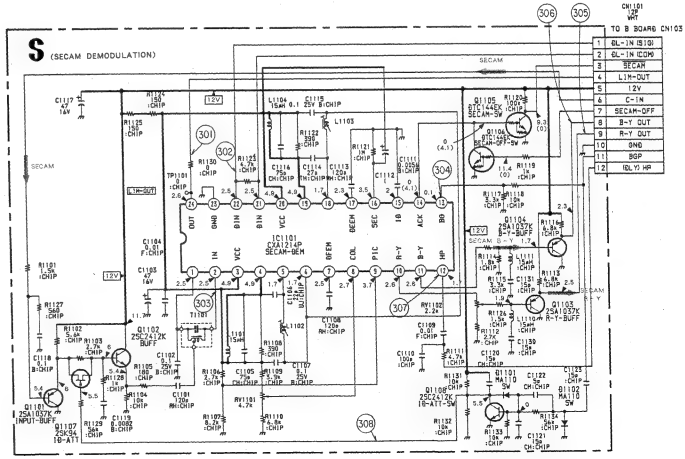

- **D BOARD WAVEFORMS**

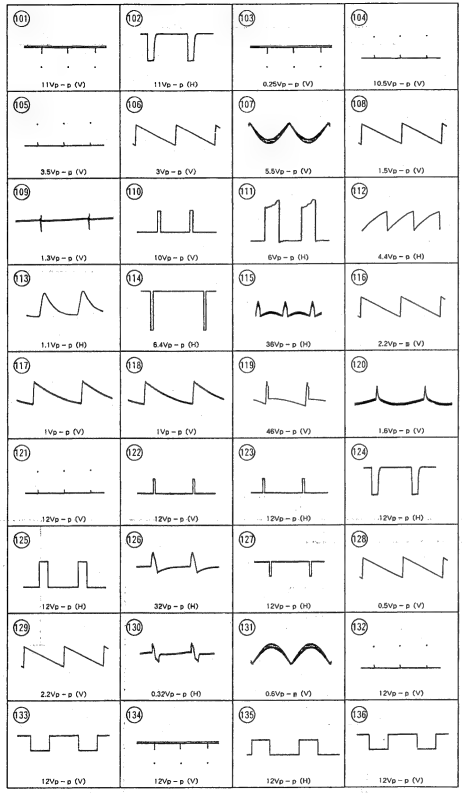

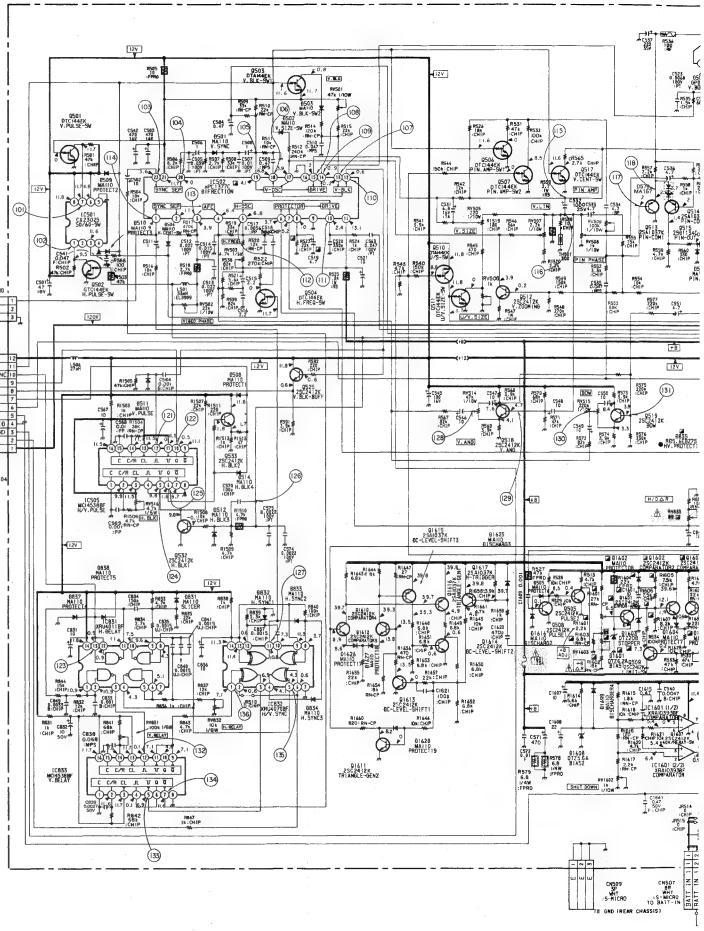

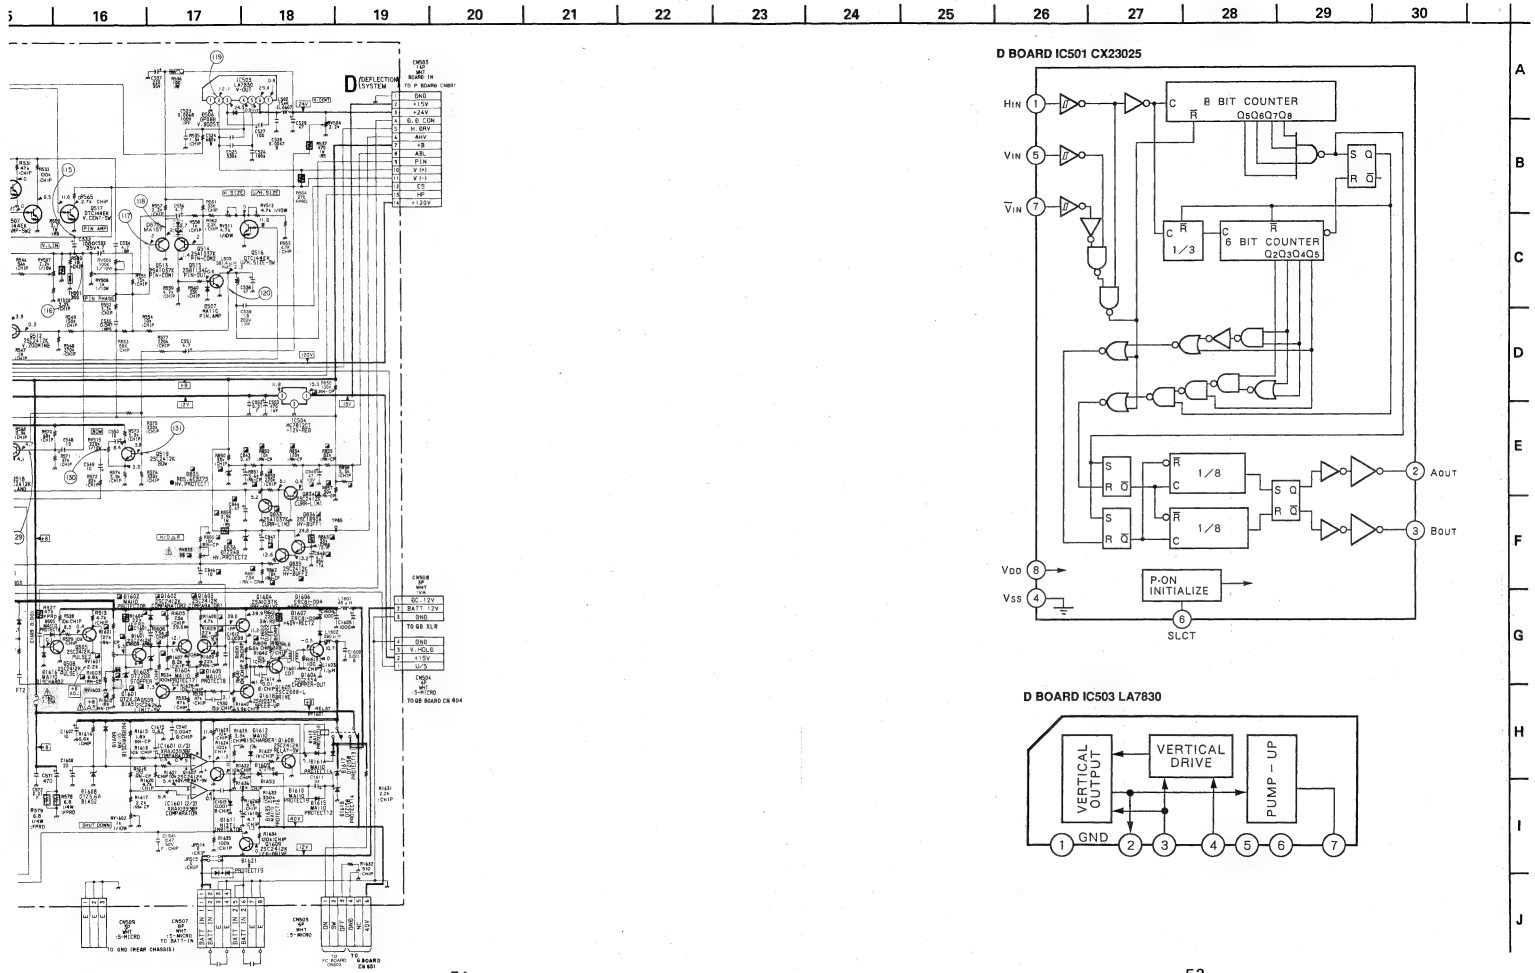
D BOARD IC501 CX23025
HIN
VIN
VIN
8 BIT COUNTER
Q5Q6Q7Q8
1/3
6 BIT COUNTER
Q2Q3Q4Q5
1/8
1/8
AOUT
BOUT
VDD
VSS
P-ON INITIALIZE
SLCT
D BOARD IC503 LA7830
VERTICAL OUTPUT
VERTICAL DRIVE
PUMP – UP
GND

D [DEFLECTION SYSTEM]

– D Board – – Component Side –

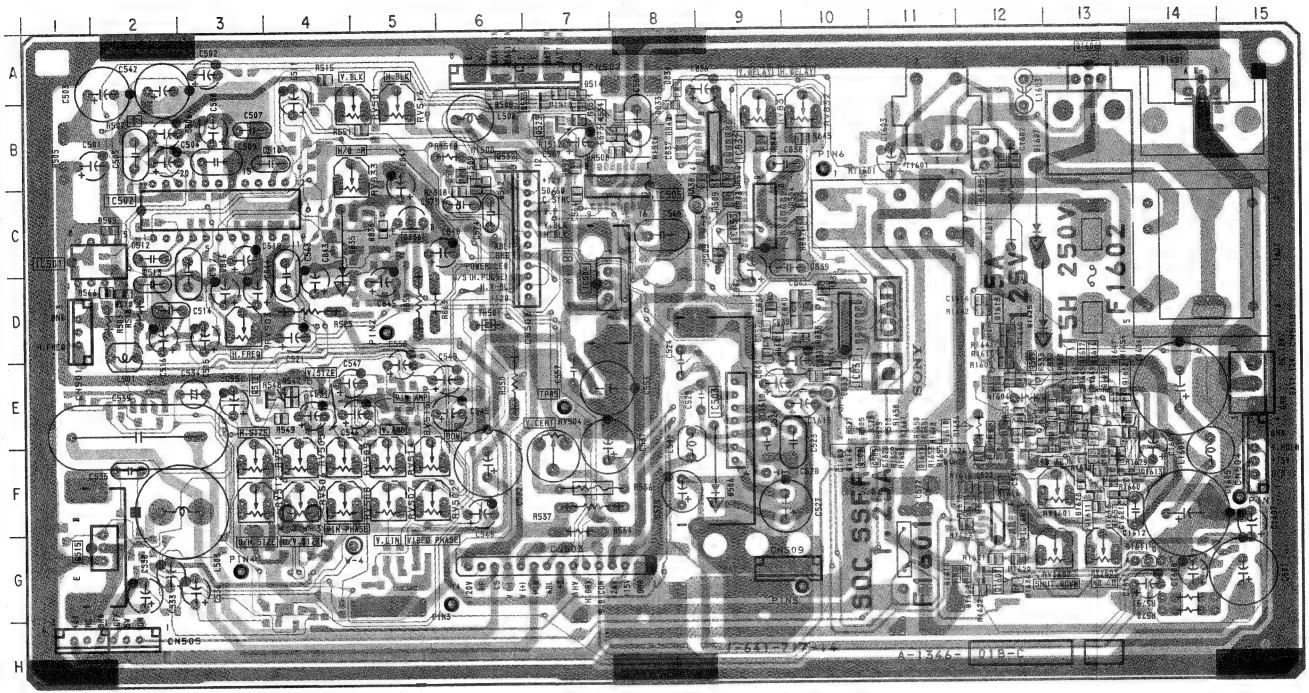

D Board (Component Side

IC	
IC505	C – 8
IC831	D – 10
IC832	B – 9
IC833	C – 9
IC1601	F – 12

TRANSISTOR	
Q505	F – 12
Q508	F – 12
Q509	E – 12
Q512	E – 4
Q525	B – 7
Q535	B – 6
Q533	A – 7
Q1607	G – 12
Q1610	E – 13
Q1611	F – 13
Q1612	E – 13
Q1613	F – 14
Q1614	F – 13
Q1615	E – 13
Q1616	E – 13
Q1617	E – 13
Q1618	D – 12

DIODE	
D505	E – 12
D508	A – 6
D509	C – 2
D510	D – 2
D514	A – 7
D833	B – 8
D834	A – 8
D836	C – 5
D837	D – 9
D838	D – 10
D1606	E – 13
D1609	G – 12
D1610	G – 11
D1611	G – 14
D1616	F – 10
D1625	D – 12
D1626	F – 13
D1627	F – 13
D1628	F – 13

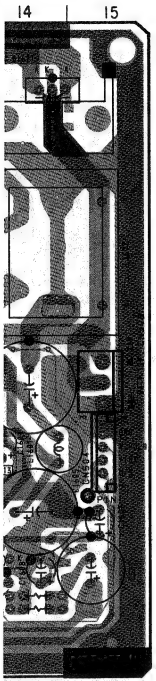

D Board (Component Side)

IC	
IC505	C－8
IC831	D－10
IC832	B－9
IC833	C－9
IC1601	F－12

TRANSISTOR	
Q505	F－12
Q508	F－12
Q509	E－12
Q512	E－4
Q525	B－7
Q535	B－6
Q533	A－7
Q1607	G－12
Q1610	E－13
Q1611	F－13
Q1612	E－13
Q1613	F－14
Q1614	F－13
Q1615	E－13
Q1616	E－13
Q1617	E－13
Q1618	D－12

DIODE	
D505	E－12
D508	A－6
D509	C－2
D510	D－2
D514	A－7
D833	B－8
D834	A－8
D836	C－5
D837	D－9
D838	D－10
D1606	E－13
D1609	G－12
D1610	G－11
D1611	G－14
D1616	F－10
D1625	D－12
D1626	F－13
D1627	F－13
D1628	F－13

－ D Board － － Conductor Side －

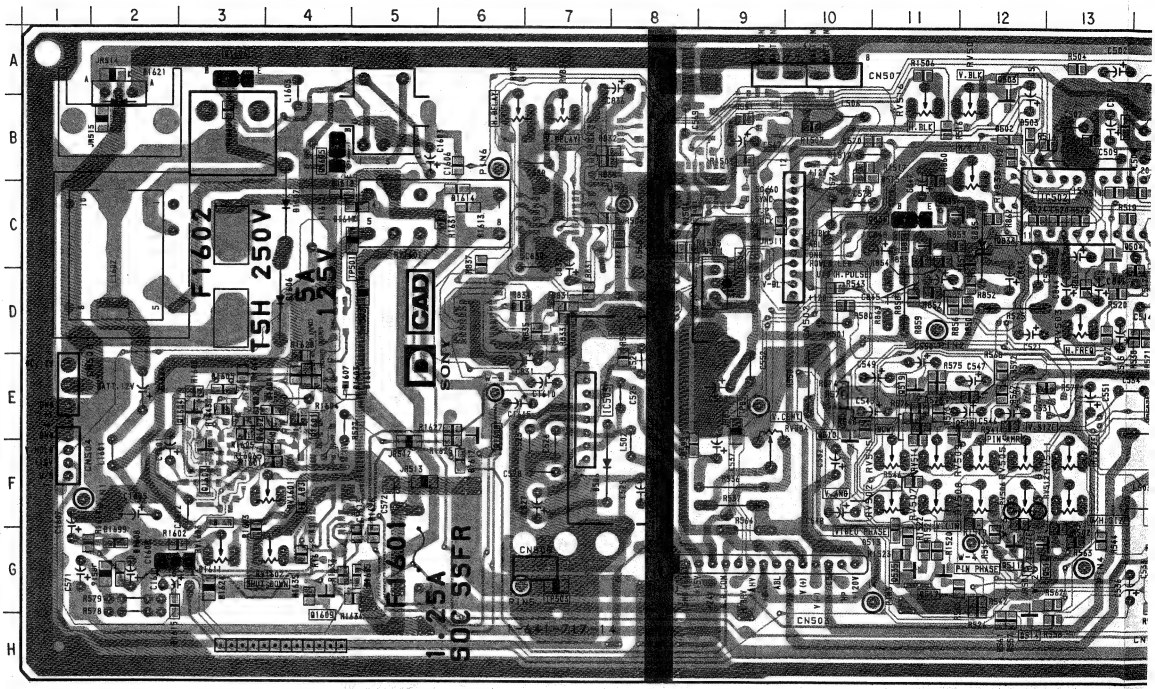

PVM-6041QM

– Conductor Side –

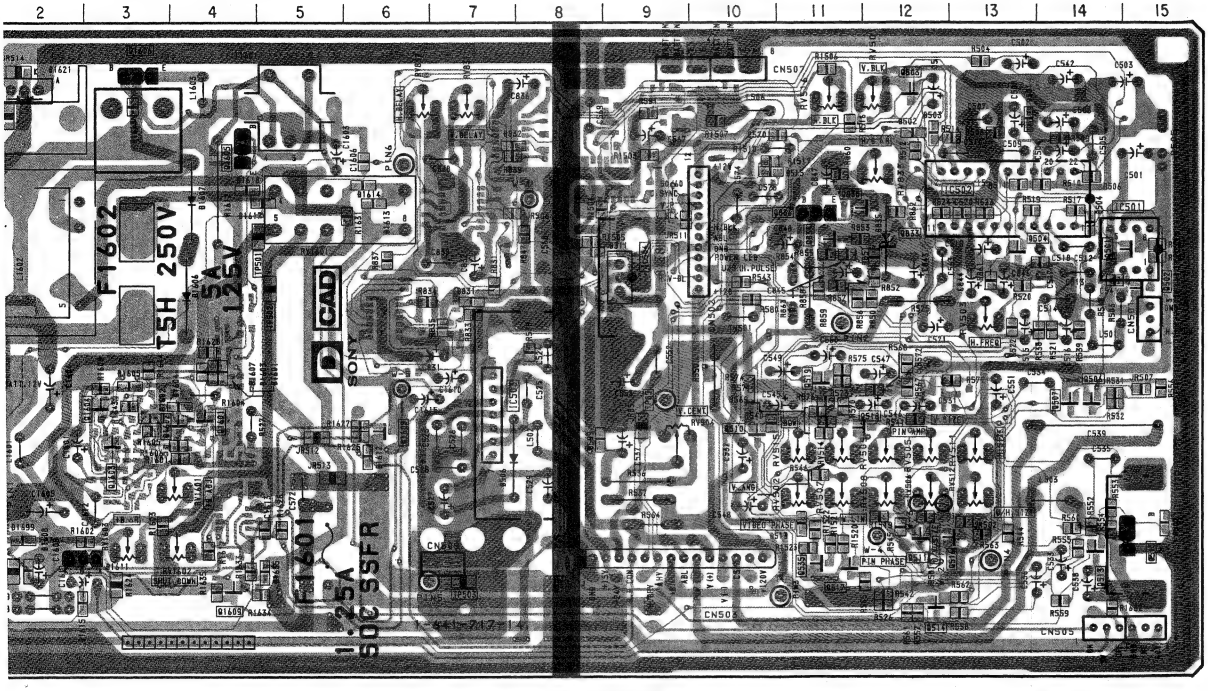

D Board (Conuctor Side)

IC	
IC501	C – 15
IC502	C – 13
IC503	E – 7
IC504	D – 9

TRANSISTOR	
Q501	C – 15
Q502	D – 15
Q503	A – 11
Q504	C – 13
Q506	E – 14
Q507	E – 14
Q510	E – 10
Q511	G – 12
Q513	G – 14
Q514	G – 12
Q515	G – 15
Q516	G – 13
Q517	G – 11
Q518	E – 12
Q519	E – 11
Q833	C – 12
Q834	C – 11
Q835	C – 11
Q836	C – 11
Q1601	E – 4
Q1602	E – 4
Q1603	F – 3
Q1604	E – 3
Q1605	B – 4
Q1606	A – 3
Q1608	E – 6
Q1609	G – 4

DIODE	
D501	B – 13
D502	B – 12
D503	B – 12
D504	C – 14
D506	F – 7
D507	E – 15
D511	C – 8
D831	D – 7
D832	B – 7
D1601	
D835	C – 12
D1501	E – 4
D1602	E – 3
D1603	E – 4
D1604	E – 4
D1605	E – 3
D1607	C – 4
D1608	E – 2
D1612	F – 6
D1613	C – 6
D1614	C – 6
D1615	G – 2
D1617	C – 4
D1618	C – 4
D1635	G – 5
D1689	G – 2

VARIABLE RESISTOR	
RV501	B – 12
RV502	F – 11
RV503	D – 13
RV504	E – 9
RV505	F – 12
RV506	F – 12
RV507	F – 11
RV508	F – 12
RV509	F – 12
RV511	F – 13
RV512	F – 13
RV514	F – 11
RV515	F – 11
RV516	B – 11
RV831	B – 7
RV832	B – 6
RV833	B – 12
RV1601	F – 4
RV1602	G – 4
RV1603	G – 3

[OCESS]

– Component Side –

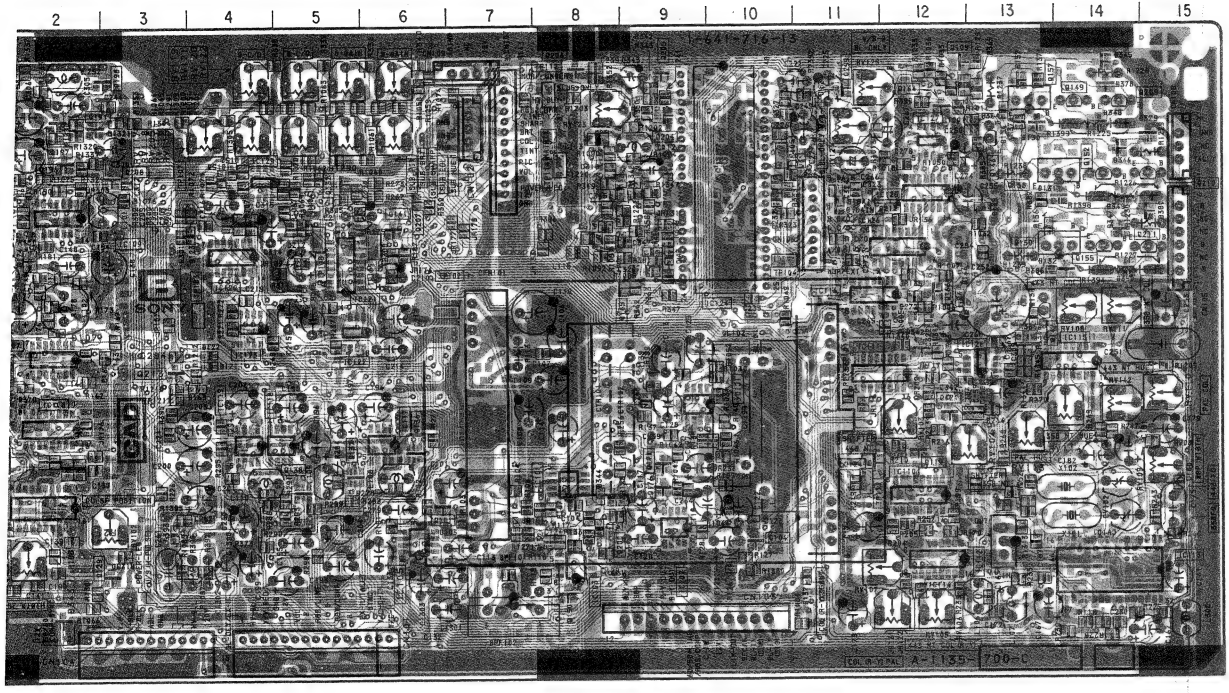

B Board (Component Side)

IC	
IC102	G – 9
IC103	G – 8
IC104	E – 9
IC105	G – 6
IC106	F – 2
IC107	D – 2
IC108	E – 2
IC109	C – 2
IC110	F – 12
IC111	E – 11
IC112	G – 13
IC113	G – 14
IC114	G – 12
IC115	E – 14
IC116	D – 11
IC117	F – 6
IC118	F – 5
IC119	F – 4
IC120	C – 4
IC121	C – 5
IC122	D – 5
IC123	D – 4
IC124	C – 10
IC125	C – 12
IC126	C – 12
IC127	B – 12
IC128	E – 13
IC129	B – 4

TRANSISTOR	
Q101	F – 6
Q104	G – 10
Q109	A – 12
Q115	C – 1
Q119	F – 12
Q121	E – 12
Q124	F – 11
Q129	G – 3
Q132	C – 5
Q136	F – 6
Q137	F – 5
Q138	F – 5
Q141	C – 6
Q150	G – 8
Q164	B – 12
Q166	D – 12
Q171	F – 9
Q176	F – 9
Q191	B – 2
Q193	B – 1
Q196	B – 2
Q197	B – 2
Q198	A – 3
Q200	F – 8
Q204	B – 9
Q205	A – 9
Q206	A – 8
Q208	B – 3
Q212	C – 11
Q299	A – 11

DIODE	
D107	D – 2
D114	C – 1
D118	C – 1
D119	C – 1
D121	E – 4
D122	D – 4
D123	C – 4
D128	E – 1
D130	B – 13
D131	C – 14
D132	D – 14
D137	G – 11
D138	D – 13
D139	C – 13
D142	C – 9
D143	C – 9
D146	D – 12
D151	C – 5
D152	B – 4
D153	B – 4
D154	B – 13
D156	C – 13
D157	A – 13
D162	B – 11
D342	D – 12
D343	H – 2
D344	F – 8
D345	A – 14
D346	B – 14
D347	C – 14
D348	B – 14
D349	C – 14
D350	D – 14
D393	F – 3

– B Boa

ent Side)

5	F-9
1	B-2
3	B-1
6	B-2
7	B-2
8	A-3
0	F-8
4	B-9
5	A-9
6	A-8
8	B-3
2	C-11
9	A-11

DIODE

7	D-2
4	C-1
8	C-1
9	C-1
1	E-4
2	D-4
3	C-4
8	E-1
0	B-13
1	C-14
2	D-14
7	G-11
8	D-13
9	C-13
2	C-9
3	C-9
5	D-12
1	C-5
2	B-4
3	B-4
4	B-13
5	C-13
7	A-13
2	B-11
2	D-12
3	H-2
4	F-8
5	A-14
5	B-14
7	C-14
8	B-14
9	C-14
0	D-14
3	F-3

— B Board — — Conductor Side —

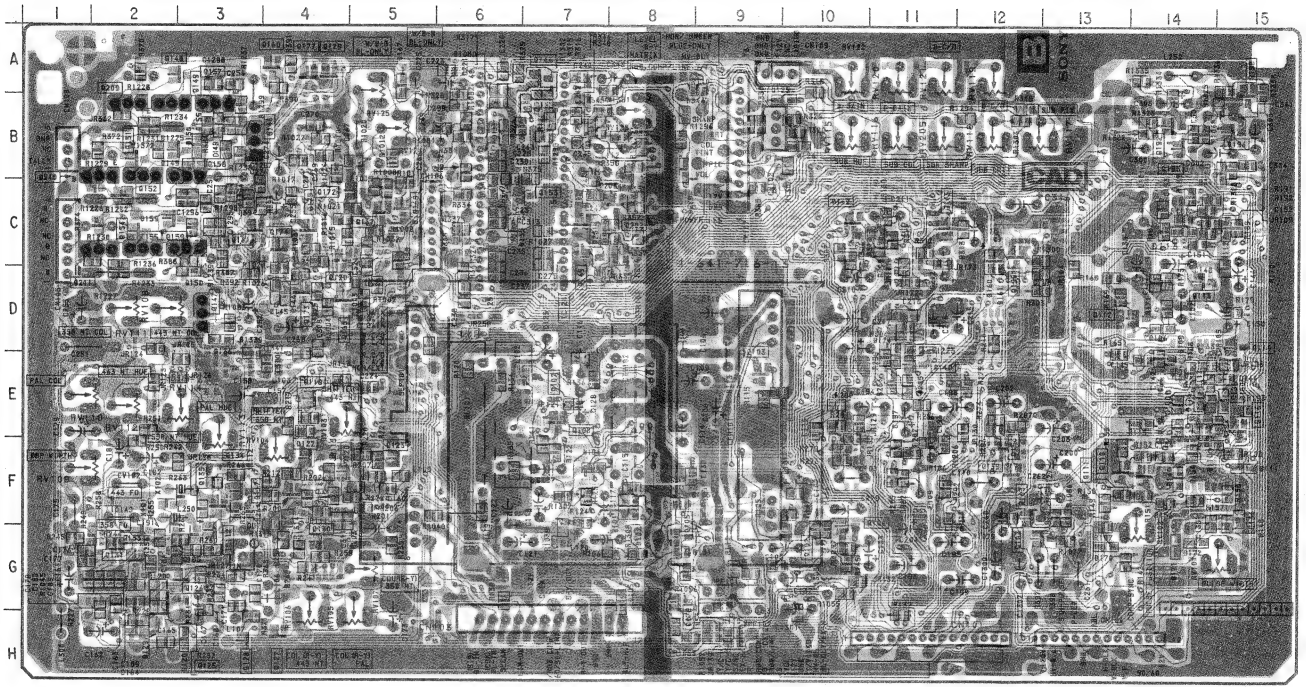

B Board (Co

TRANSISTOR	
Q102	G-10
Q103	E-9
Q106	F-10
Q107	E-7
Q108	E-7
Q112	D-14
Q113	D-14
Q114	D-15
Q116	E-15
Q117	F-4
Q118	E-4
Q120	F-4
Q122	F-4
Q123	F-5
Q125	G-2
Q126	G-3
Q127	H-4
Q128	H-3
Q130	G-4
Q131	G-2
Q133	G-2
Q134	F-3
Q135	F-3
Q139	F-12
Q140	E-11
Q142	C-10
Q143	C-11
Q144	A-7
Q145	C-7
Q146	B-3
Q147	D-3
Q148	A-3
Q149	B-2
Q151	B-2
Q152	B-2
Q153	C-6
Q154	C-2
Q155	C-2
Q157	B-3
Q158	B-3
Q159	C-3
Q160	A-4
Q161	C-3
Q162	G-12
Q163	F-12
Q165	D-4
Q167	C-5
Q168	C-5
Q170	C-4
Q172	C-5
Q173	D-4
Q174	C-4
Q175	C-4
Q177	A-4
Q179	A-4

ıctor Side –

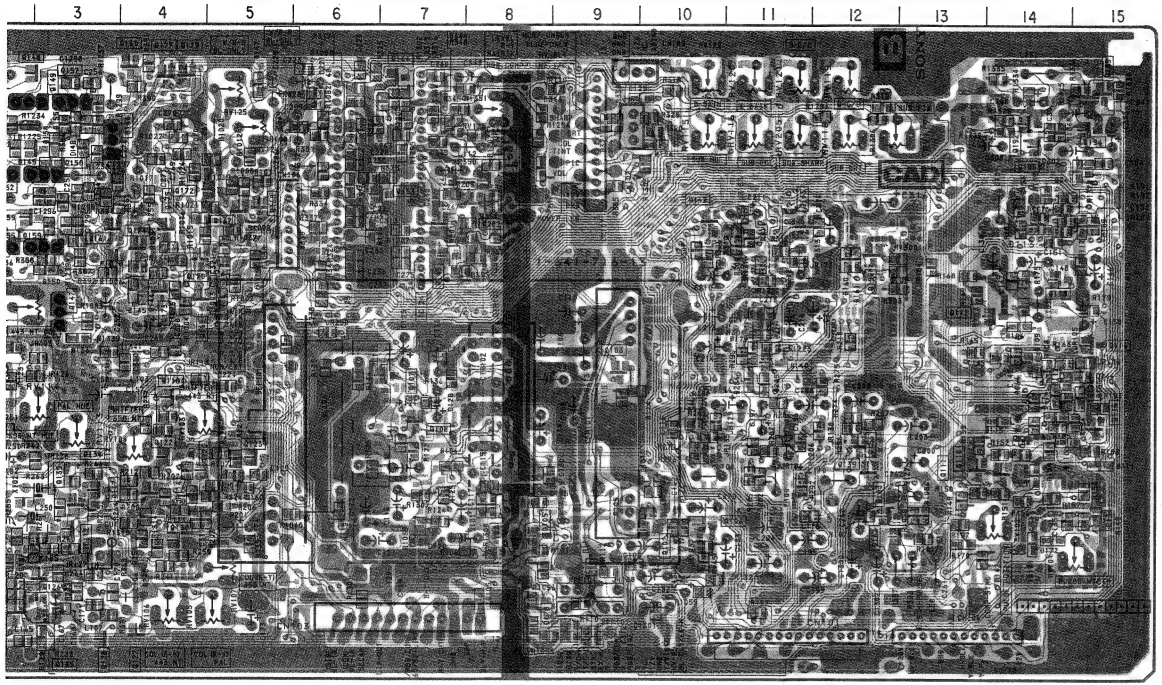

B Board (Conductor Side)

TRANSISTOR	
Q102	G – 10
Q103	E – 9
Q106	F – 10
Q107	E – 7
Q108	E – 7
Q112	D – 14
Q113	D – 14
Q114	D – 15
Q116	E – 15
Q117	F – 4
Q118	E – 4
Q120	F – 4
Q122	F – 4
Q123	F – 5
Q125	G – 2
Q126	G – 3
Q127	H – 4
Q128	H – 3
Q130	G – 4
Q131	G – 2
Q133	G – 2
Q134	F – 3
Q135	F – 3
Q139	F – 12
Q140	E – 11
Q142	C – 10
Q143	C – 11
Q144	A – 7
Q145	C – 7
Q146	B – 3
Q147	D – 3
Q148	A – 3
Q149	B – 2
Q151	B – 2
Q152	B – 2
Q153	C – 6
Q154	C – 2
Q155	C – 2
Q157	B – 3
Q158	B – 3
Q159	C – 3
Q160	A – 4
Q161	C – 3
Q162	G – 12
Q163	F – 12
Q165	D – 4
Q167	C – 5
Q168	C – 5
Q170	C – 4
Q172	C – 5
Q173	D – 4
Q174	C – 4
Q175	C – 4
Q177	A – 4
Q179	A – 4
Q190	C – 12
Q192	B – 8
Q194	B – 15
Q195	B – 14
Q199	A – 15
Q201	C – 7
Q202	C – 8
Q203	C – 8
Q209	B – 2
Q210	B – 2
Q211	C – 2

DIODE	
D101	F – 8
D102	F – 8
D104	F – 7
D105	G – 8
D106	D – 14
D108	E – 14
D109	E – 14
D110	F – 14
D111	F – 15
D112	C – 15
D113	C – 14
D115	E – 14
D116	E – 14
D117	E – 14
D120	H – 3
D125	B – 9
D126	B – 10
D127	F – 13
D129	H – 2
D133	B – 6
D134	C – 6
D135	C – 6
D136	D – 3
D144	D – 4
D145	D – 4
D147	A – 5
D148	B – 3
D149	B – 2
D150	D – 3
D155	B – 3
D158	B – 3
D159	C – 2
D160	C – 12
D161	C – 12
D170	G – 13
D171	G – 14
D172	G – 14
D285	E – 11
D289	B – 8
D341	B – 15

VARIABLE RESISTOR	
RV101	G – 15
RV102	F – 14
RV103	E – 4
RV104	F – 4
RV105	H – 5
RV106	H – 4
RV107	G – 5
RV108	D – 2
RV109	F – 1
RV110	E – 1
RV111	D – 2
RV112	E – 2
RV113	E – 3
RV114	E – 3
RV115	B – 10
RV116	B – 11
RV118	B – 12
RV119	A – 12
RV120	A – 11
RV121	A – 11
RV122	A – 10
RV123	B – 8
RV124	B – 5
RV125	B – 5
RV205	B – 11

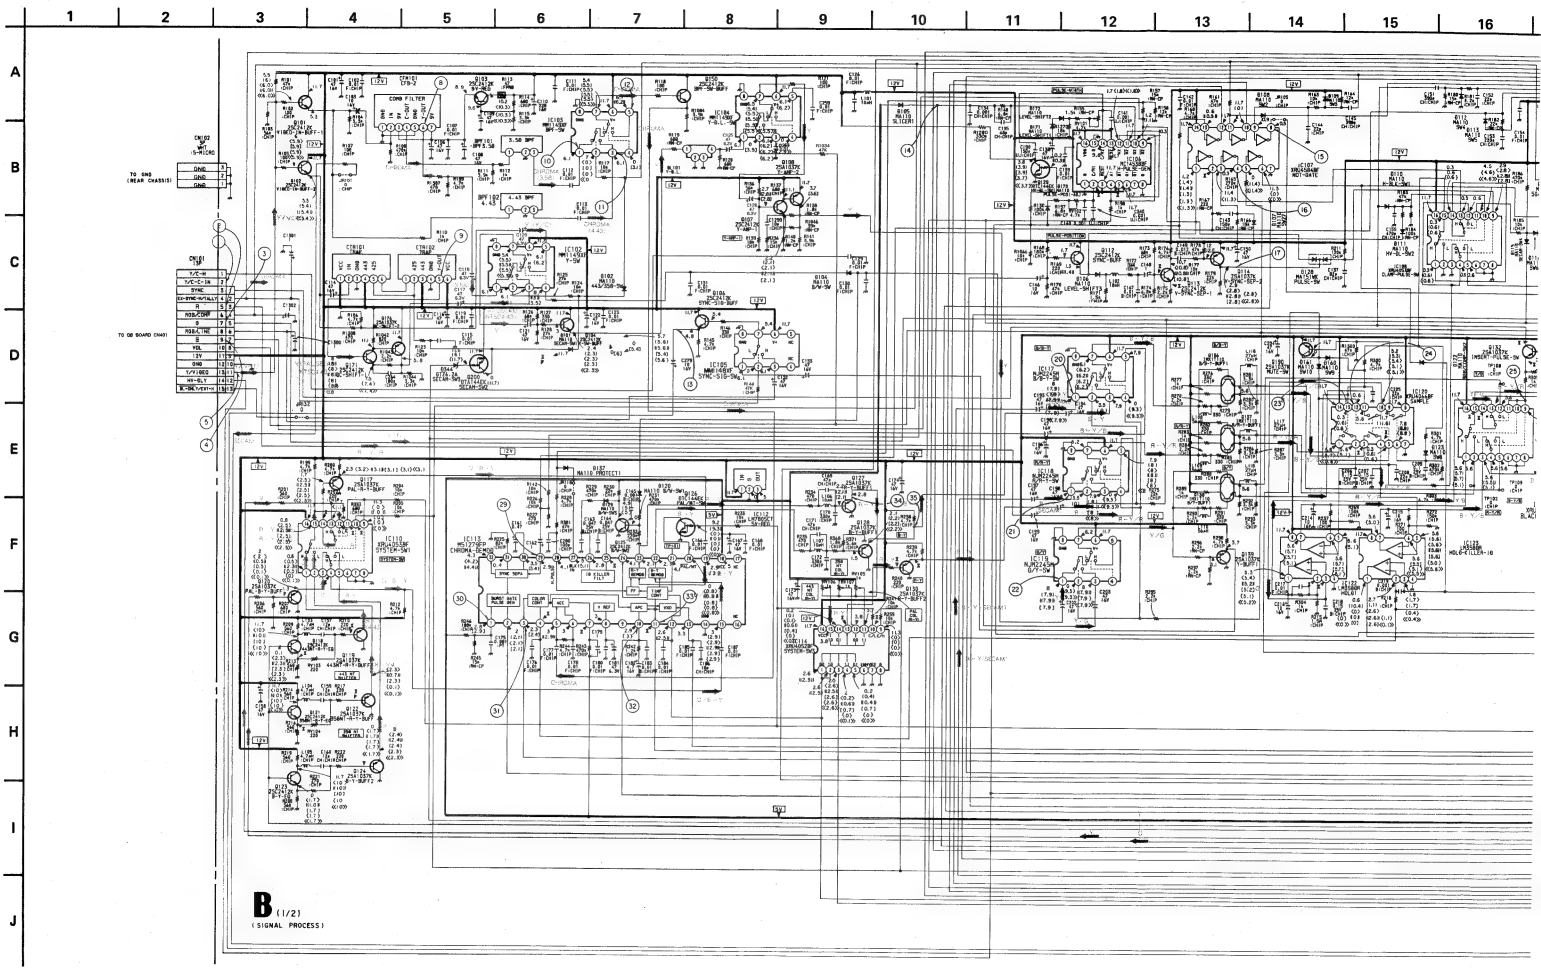
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
A
B
C
D
E
F
G
H
I
J
TO GND (REAR CHASSIS)
TO QB BOARD (NA01)
B (1/2)
(SIGNAL PROCESS)

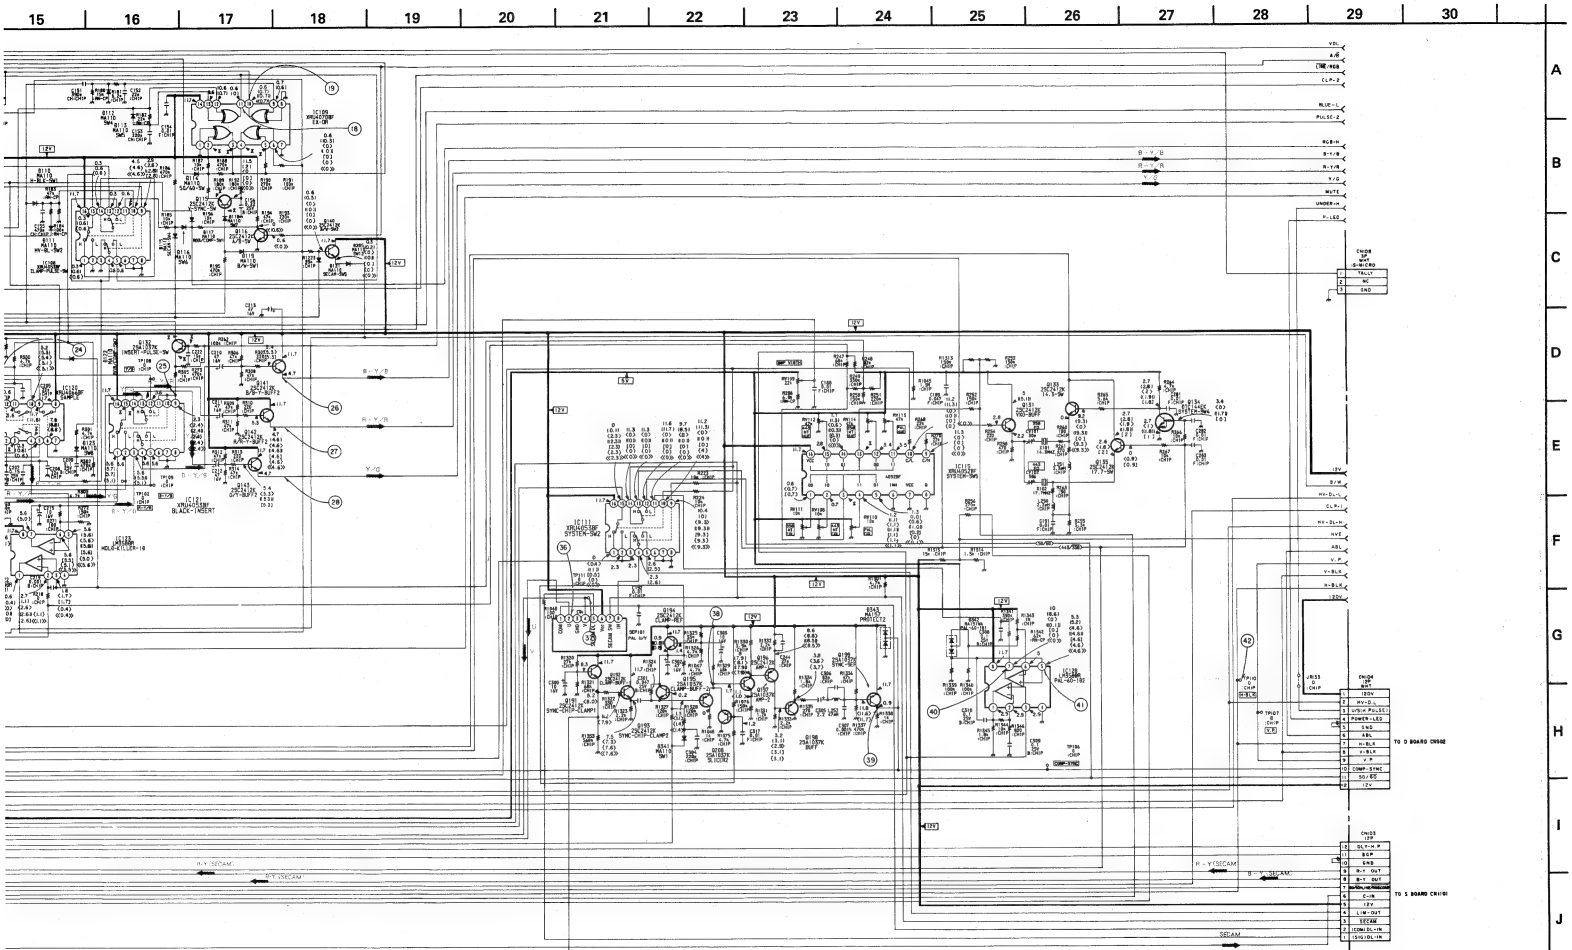
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
A
B
C
D
E
F
G
H
I
J
CN08 (P) B-HERO
"FALLT"
NC
GND
CN04 (P) MAIN
15SV
HV-DL
VPLK-PULSE
POWER-LED
SNS
ABL
H-BLK
V-P
COMP-SYNC
50/60
12V
TO D BOARD CN08
CN03 (P)
DLY-H-P
BGP
BNS
B-Y OUT
B-Y OUT
C-IN
LUM-OUT
12V
SECAM
(CONV.DL-IN)
(SIG)DL-IN
TO S BOARD CN101
R-Y (SECAM)
B-Y (SECAM)
SECAM

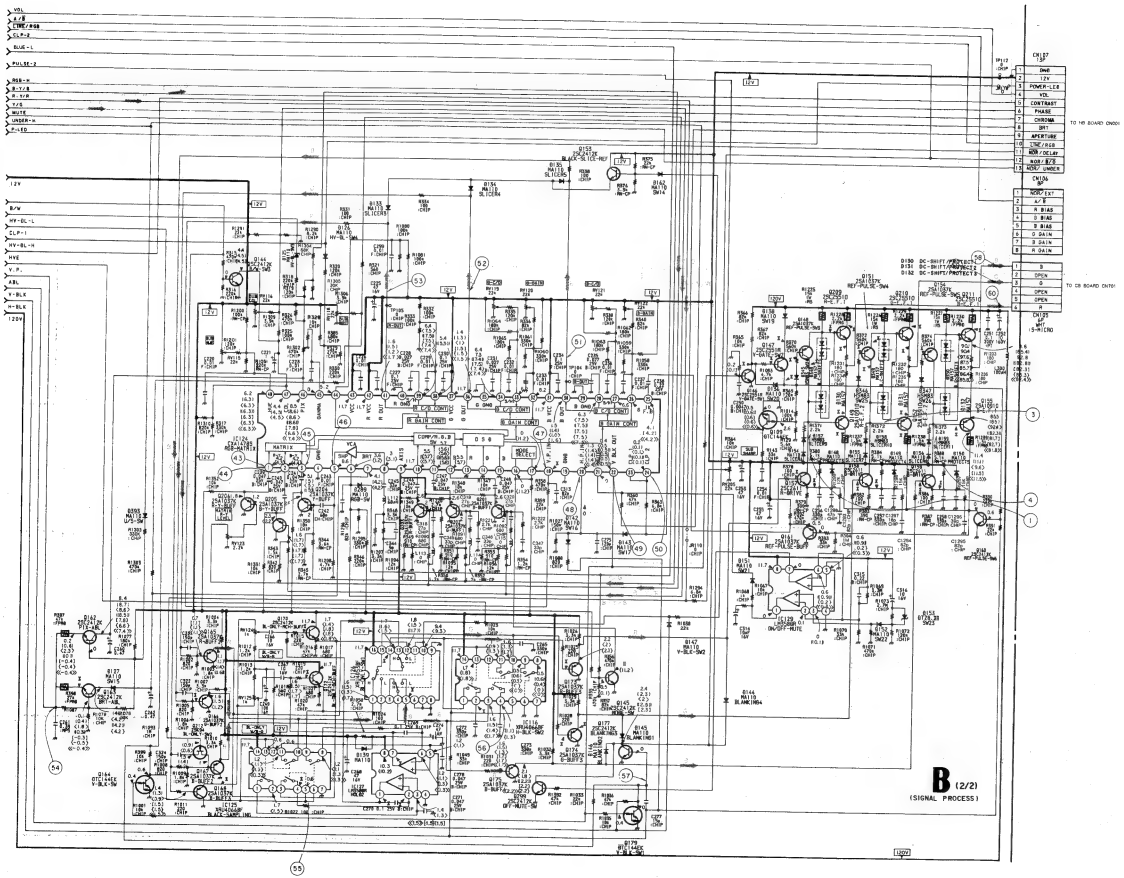
B (2/2)
(SIGNAL PROCESS)
CN127
CN128
TO HP BOARD (INDOX)
TO CB BOARD (INTER)

— B Board —

< TRANSISTOR >

		PAL	SECAM	NTSC 3.58	NTSC 4.43	S (Y/C)	ANALOG RGB	COMPO-NENT
Q113	E	0.5	0.5	0.4	0.4	0.5	0.5	0.5
	B	1.0	1.0	0.9	0.9	0.9	0.9	1.0
Q115	E	11.2	9.3	0.0	10.6	0.0	0.0	0.0
	B	2.8	2.2	0.1	2.4	0.1	0.1	0.0
Q118	E	0.0	0.0	1.7	1.7	1.7	1.7	1.7
Q119	B	0.1	0.0	1.7	1.7	1.7	1.7	1.7
Q121	E	0.0	0.0	1.7	1.7	1.7	1.7	1.7
Q122	B	0.0	0.0	1.7	1.7	1.7	1.7	1.7
Q130	E	4.3	4.3	4.4	4.4	4.5	4.4	4.4
	B	3.7	3.7	3.8	3.8	3.9	3.8	3.8
Q132	E	2.3	2.3	2.4	2.3	2.4	2.4	2.4
	C	1.8	1.7	1.7	1.7	1.7	1.8	1.8
	B	2.7	2.6	2.6	2.7	2.8	2.7	2.8
Q146	C	116.7	114.4	110.4	113.2	113.7	114.3	114.1
Q147	E	117.9	115.8	111.8	114.5	115.0	115.5	115.4
	C	126.0	123.5	120.3	123.4	123.8	124.8	124.4
	B	119.8	119.5	110.5	118.4	118.2	114.2	114.2
Q148	C	86.1	84.9	91.2	83.4	82.8	82.5	82.2
	B	94.0	93.3	86.3	92.4	92.1	94.2	90.6
Q149	E	1.6	1.6	1.4	1.7	1.7	1.7	1.7
	C	86.1	84.9	91.2	83.4	82.7	82.5	82.5
Q151	E	90.7	91.4	98.0	87.9	87.0	86.5	86.4
	C	99.2	99.5	96.5	96.4	95.3	94.9	94.7
	B	92.1	92.7	100.2	89.5	92.4	90.5	88.9
Q152	E	86.1	86.0	92.8	82.6	82.9	82.8	82.7
	C	10.8	10.5	9.7	10.9	10.9	10.9	11.0
Q154	B	92.5	92.9	99.8	90.1	88.7	90.4	89.2
Q155	B	86.3	86.5	95.7	85.7	83.9	84.8	83.9
Q157	E	82.4	81.1	87.5	79.9	79.9	80.8	79.4
	B	85.0	84.8	91.2	84.4	82.7	82.5	82.1
Q158	E	1.6	1.5	1.3	1.6	1.6	1.7	1.7
	B	2.1	2.0	1.8	2.1	2.2	2.2	2.2
Q159	E	1.6	1.6	1.3	1.6	1.7	1.7	1.7
	B	2.2	2.1	1.5	2.1	2.2	2.2	2.2
Q163	E	0.2	0.8	2.7	0.5	−0.5	−0.7	−0.6
Q166	B	0.9	0.9	0.8	1.0	1.0	1.0	1.0
Q168	C	2.1	2.0	1.8	2.1	2.2	2.1	2.2
Q170	B	2.3	2.3	2.1	2.4	2.4	2.4	2.4
Q172	B	2.2	2.1	1.9	2.2	2.3	2.2	2.3
Q173	B	1.7	1.6	1.4	1.7	1.7	1.7	1.7
Q174	E	2.1	2.0	1.8	2.1	2.2	2.2	2.2
	B	1.6	1.5	1.3	1.6	1.6	1.7	1.7
Q178	B	6.2	6.3	6.2	6.3	6.1	6.2	6.2
Q209	E	83.4	81.5	87.9	80.3	80.4	80.4	78.8
	C	115.8	113.2	110.7	113.2	113.8	114.5	114.2
	B	87.8	86.4	92.8	85.0	84.3	84.2	83.8
Q210	E	86.5	86.3	93.1	83.0	83.3	83.0	82.8
	C	116.5	114.2	111.5	113.9	114.5	115.1	114.9
Q211	C	115.9	113.6	111.7	113.3	113.8	114.5	114.3

< IC >

		PAL	SECAM	NTSC 3.58	NTSC 4.43	S (Y/C)	ANALOG RGB	COMPO-NENT
IC102	②	6.6	6.6	0.0	6.6	0.0	0.0	0.0
IC106	②	0.2	0.1	0.1	0.1	0.1	0.1	0.2
	⑥	1.8	1.7	1.7	1.7	1.7	1.8	1.8
IC107	②	10.7	10.7	10.6	10.6	10.6	10.6	10.6
	⑪	1.2	10.7	0.0	0.0	0.0	0.0	0.0
IC108	⑪	9.7	0.4	9.7	9.6	9.6	1.1	9.5
IC109	②	11.3	11.3	0.0	10.8	0.0	0.0	0.0
	③	11.3	11.4	0.0	11.3	0.0	0.0	0.0
	④	11.7	0.0	0.0	11.7	0.0	0.0	0.0
	⑤	11.9	11.1	0.0	11.0	0.0	0.0	0.0
IC110	④	2.1	2.2	2.5	2.5	2.5	2.5	2.5
	⑩	11.3	11.3	0.0	11.3	0.0	0.0	0.0
	⑪	11.3	11.3	0.0	0.0	0.0	0.0	0.0
	⑫	0.8	0.8	2.5	2.5	2.5	2.5	2.5
	⑥	1.7	1.7	2.5	2.6	2.5	2.5	2.5
IC113	⑥	2.7	1.1	2.8	2.9	2.8	1.1	1.1
	⑦	4.2	4.3	4.2	4.3	4.3	4.8	4.8
	⑪	3.0	2.9	2.8	3.0	2.8	2.9	2.9
	⑭	2.2	2.5	2.9	2.2	1.9	2.8	2.8
IC114	⑩	11.4	11.3	0.0	0.0	0.0	0.0	0.0
	⑪	3.7	3.7	3.8	3.8	3.8	3.9	3.9
IC115	⑤	1.2	1.1	0.8	0.7	0.7	0.8	0.8
	⑪	3.5	3.5	3.4	2.8	3.4	3.4	3.4
IC116	②	0.0	0.0	1.0	1.1	1.1	1.3	1.1
IC120	③	5.5	5.6	5.8	5.8	5.8	5.8	5.8
	④	5.5	5.8	5.8	5.8	5.8	5.0	5.8
IC121	⑪	5.3	5.3	5.4	5.2	5.2	5.1	5.1
	⑭	5.6	5.7	5.8	5.8	5.7	5.7	5.7
	⑮	5.8	5.7	5.8	5.8	5.7	5.7	5.8
IC122	②	5.3	5.3	5.4	5.2	5.2	5.1	5.1
	③	5.3	5.3	5.4	5.2	5.2	5.1	5.1
IC124	⑭	0.1	0.1	0.2	0.2	0.2	0.2	0.2
IC125	④	1.4	1.4	1.3	1.4	1.5	1.5	1.5
IC129	②	1.6	1.5	1.3	1.6	1.6	1.7	1.6
	⑤	1.8	1.5	1.3	1.6	1.6	1.6	1.7
	⑥	1.7	1.6	1.4	1.7	1.7	1.6	1.7
IC127	①	3.0	2.9	2.8	3.0	3.1	3.0	3.0
	②	1.4	1.4	1.3	1.5	1.5	1.5	1.5
	⑦	2.1	2.7	2.4	2.8	2.8	2.8	2.8

• B BOARD WAVEFORMS

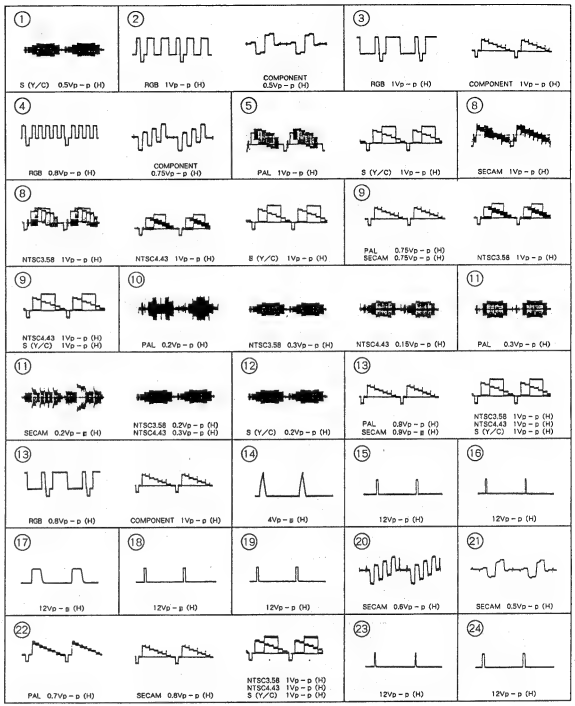

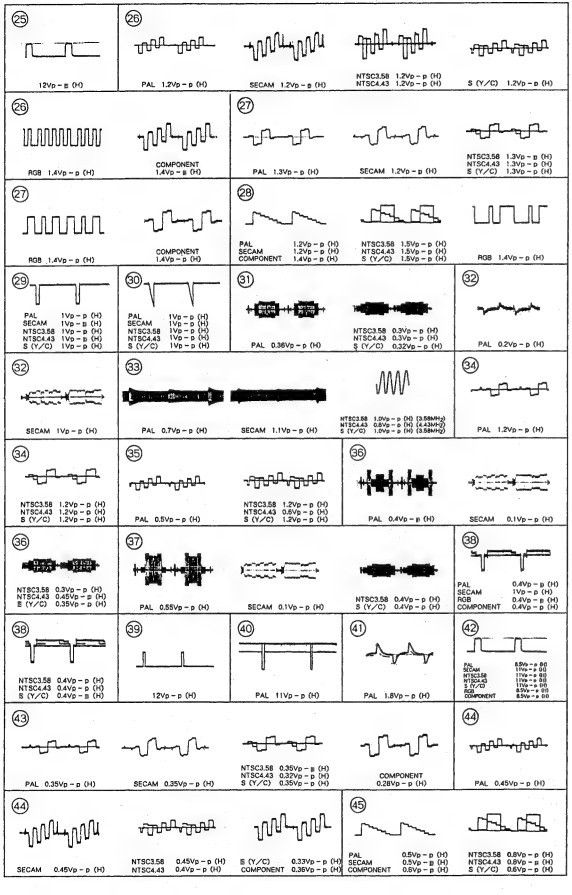
25
12Vp-p (H)
26
PAL 1.2Vp-p (H)
SECAM 1.2Vp-p (H)
NTSC3.58 1.2Vp-p (H)
NTSC4.43 1.2Vp-p (H)
S (Y/C) 1.2Vp-p (H)
26
RGB 1.4Vp-p (H)
COMPONENT 1.4Vp-p (H)
27
PAL 1.3Vp-p (H)
SECAM 1.2Vp-p (H)
NTSC3.58 1.3Vp-p (H)
NTSC4.43 1.3Vp-p (H)
S (Y/C) 1.3Vp-p (H)
27
RGB 1.4Vp-p (H)
COMPONENT 1.4Vp-p (H)
28
PAL 1.2Vp-p (H)
SECAM 1.2Vp-p (H)
COMPONENT 1.4Vp-p (H)
NTSC3.58 1.5Vp-p (H)
NTSC4.43 1.5Vp-p (H)
S (Y/C) 1.5Vp-p (H)
RGB 1.4Vp-p (H)
29
PAL 1Vp-p (H)
SECAM 1Vp-p (H)
NTSC3.58 1Vp-p (H)
NTSC4.43 1Vp-p (H)
S (Y/C) 1Vp-p (H)
30
PAL 1Vp-p (H)
SECAM 1Vp-p (H)
NTSC3.58 1Vp-p (H)
NTSC4.43 1Vp-p (H)
S (Y/C) 1Vp-p (H)
31
PAL 0.36Vp-p (H)
NTSC3.58 0.3Vp-p (H)
NTSC4.43 0.3Vp-p (H)
S (Y/C) 0.32Vp-p (H)
32
PAL 0.2Vp-p (H)
32
SECAM 1Vp-p (H)
33
PAL 0.7Vp-p (H)
SECAM 1.1Vp-p (H)
NTSC3.58 1.2Vp-p (H) (3.58MHz)
NTSC4.43 0.8Vp-p (H) (4.43MHz)
S (Y/C) 1.2Vp-p (H) (3.58MHz)
34
PAL 1.2Vp-p (H)
34
NTSC3.58 1.2Vp-p (H)
NTSC4.43 1.2Vp-p (H)
S (Y/C) 1.2Vp-p (H)
35
PAL 0.5Vp-p (H)
NTSC3.58 1.2Vp-p (H)
NTSC4.43 0.8Vp-p (H)
S (Y/C) 1.2Vp-p (H)
36
PAL 0.4Vp-p (H)
SECAM 0.1Vp-p (H)
36
NTSC3.58 0.3Vp-p (H)
NTSC4.43 0.45Vp-p (H)
S (Y/C) 0.35Vp-p (H)
37
PAL 0.65Vp-p (H)
SECAM 0.1Vp-p (H)
NTSC3.58 0.4Vp-p (H)
S (Y/C) 0.4Vp-p (H)
38
PAL 0.4Vp-p (H)
SECAM 1Vp-p (H)
RGB 0.4Vp-p (H)
COMPONENT 0.4Vp-p (H)
38
NTSC3.58 0.4Vp-p (H)
NTSC4.43 0.4Vp-p (H)
S (Y/C) 0.4Vp-p (H)
39
12Vp-p (H)
40
PAL 11Vp-p (H)
41
PAL 1.8Vp-p (H)
42
PAL 0.5Vp-p 60
SECAM 11Vp-p 60
NTSC3.58 11Vp-p 60
NTSC4.43 11Vp-p 60
S (Y/C) 11Vp-p 60
RGB 0.5Vp-p 60
COMPONENT 0.5Vp-p 60
43
PAL 0.35Vp-p (H)
SECAM 0.35Vp-p (H)
NTSC3.58 0.35Vp-p (H)
NTSC4.43 0.32Vp-p (H)
S (Y/C) 0.35Vp-p (H)
COMPONENT 0.28Vp-p (H)
44
PAL 0.45Vp-p (H)
44
SECAM 0.45Vp-p (H)
NTSC3.58 0.45Vp-p (H)
NTSC4.43 0.4Vp-p (H)
S (Y/C) 0.33Vp-p (H)
COMPONENT 0.35Vp-p (H)
45
PAL 0.5Vp-p (H)
SECAM 0.5Vp-p (H)
COMPONENT 0.5Vp-p (H)
NTSC3.58 0.8Vp-p (H)
NTSC4.43 0.8Vp-p (H)
S (Y/C) 0.6Vp-p (H)

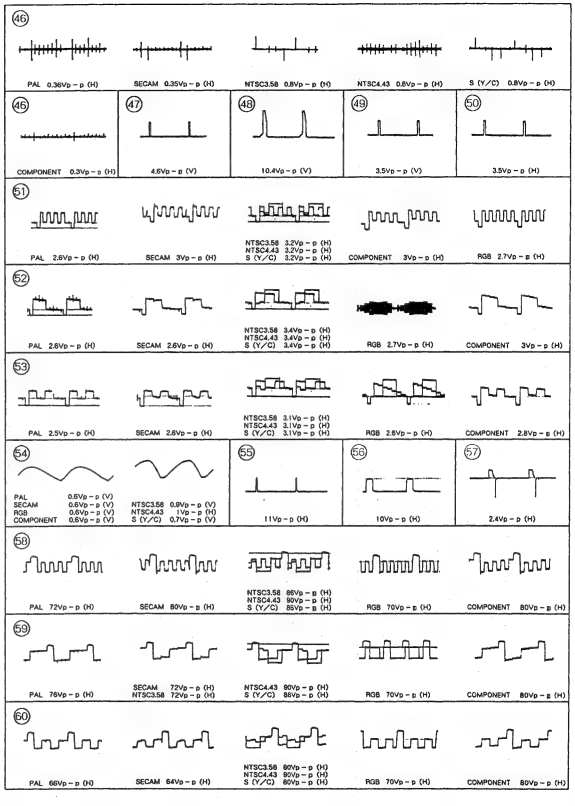
46
PAL 0.36Vp-p (H)
SECAM 0.35Vp-p (H)
NTSC3.58 0.8Vp-p (H)
NTSC4.43 0.8Vp-p (H)
S (Y/C) 0.8Vp-p (H)
46
COMPONENT 0.3Vp-p (H)
47
4.6Vp-p (V)
48
10.4Vp-p (V)
49
3.5Vp-p (V)
50
3.5Vp-p (H)
51
PAL 2.6Vp-p (H)
SECAM 3Vp-p (H)
NTSC3.58 3.2Vp-p (H)
NTSC4.43 3.2Vp-p (H)
S (Y/C) 3.2Vp-p (H)
COMPONENT 3Vp-p (H)
RGB 2.7Vp-p (H)
52
PAL 2.6Vp-p (H)
SECAM 2.6Vp-p (H)
NTSC3.58 3.4Vp-p (H)
NTSC4.43 3.4Vp-p (H)
S (Y/C) 3.4Vp-p (H)
RGB 2.7Vp-p (H)
COMPONENT 3Vp-p (H)
53
PAL 2.5Vp-p (H)
SECAM 2.8Vp-p (H)
NTSC3.58 3.1Vp-p (H)
NTSC4.43 3.1Vp-p (H)
S (Y/C) 3.1Vp-p (H)
RGB 2.8Vp-p (H)
COMPONENT 2.8Vp-p (H)
54
PAL 0.6Vp-p (V)
SECAM 0.6Vp-p (V)
RGB 0.6Vp-p (V)
COMPONENT 0.6Vp-p (V)
NTSC3.58 0.9Vp-p (V)
NTSC4.43 1Vp-p (H)
S (Y/C) 0.7Vp-p (V)
55
11Vp-p (H)
56
10Vp-p (H)
57
2.4Vp-p (H)
58
PAL 72Vp-p (H)
SECAM 80Vp-p (H)
NTSC3.58 86Vp-p (H)
NTSC4.43 90Vp-p (H)
S (Y/C) 85Vp-p (H)
RGB 70Vp-p (H)
COMPONENT 80Vp-p (H)
59
PAL 76Vp-p (H)
SECAM 72Vp-p (H)
NTSC3.58 72Vp-p (H)
NTSC4.43 90Vp-p (H)
S (Y/C) 86Vp-p (H)
RGB 70Vp-p (H)
COMPONENT 80Vp-p (H)
60
PAL 66Vp-p (H)
SECAM 64Vp-p (H)
NTSC3.58 60Vp-p (H)
NTSC4.43 90Vp-p (H)
S (Y/C) 80Vp-p (H)
RGB 70Vp-p (H)
COMPONENT 80Vp-p (H)

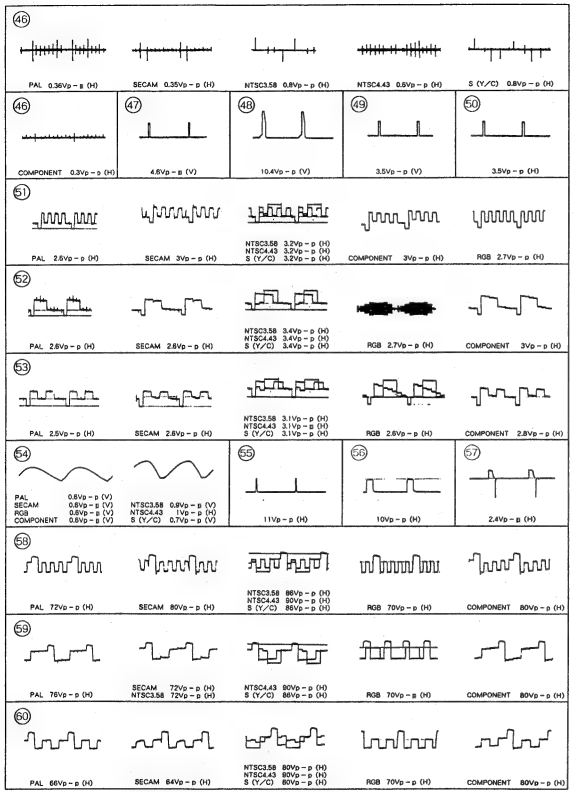

CB [CRT SOCKET]

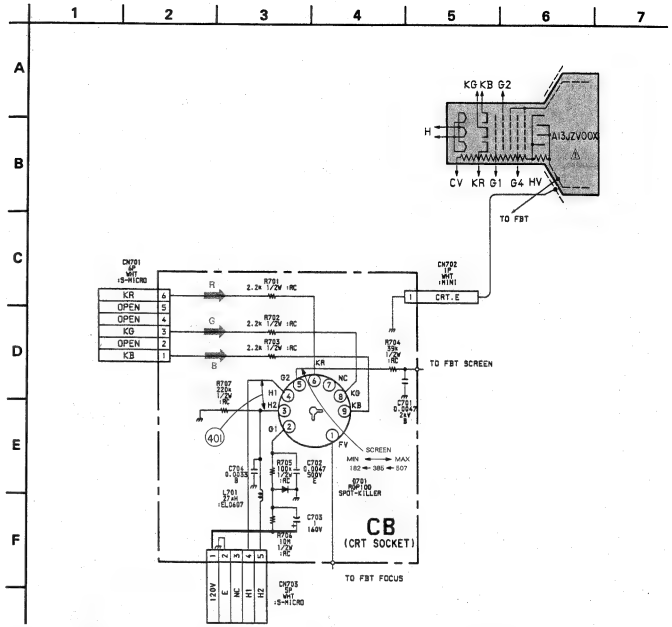

– CB Board –



• CB BOARD WAVEFORMS



6-6. SEMICONDUCTORS

AN5265

CXA1214P

CXA1478S

CX23025

LA7830

LM7805CT
LM7812CT

LM358D
MM1148XF
MM1149XF
NJM2245M
XRA10393F

MC14538BF



M51279FP

μPC1377C



XRU4011BF
XRU4070BF

XRU4052BF
XRU4053BF
XRU4066BF

XRU4584BF

DTA144EK
DTC144EK
2SA1162-G
2SC2412K-QR

IMX1

2SA1091-0
2SC1890A-E
2SC2551-0
2SC25510

2SC2334-L
2SD835
2SD1134-C

2SC2555

2SC2611
2SC2688-LK

2SC2958

2SC3736

2SK94-X4

CR02AM-4TB



DTZ15B
DTZ20B
DTZ24B
DTZ5.6A
DTZ8.2B

EGP20G

ERC81-004
RU-3AM

1SS83

MA110

1S2836

MA152WK
1SS226

N13T1

RD3.6ESB1
RD5.6ESB2
RD8.2ESB3

RD6.2M-B1

SLP281C-50

U05G

NOTE:
- Ite
  cri
  are
- The
  part
  numb
- Ite
  they
  serv
  when

7-1.

●:
▲:
■:
○:
△:

6

REF.NO. P

1 X
2 4
3 *4
4 *4
5 4

6 *4
7 1
8 *A
9 *A
10 A 1

11 *A
12 A 1
13 *A
14 A 1
15 4

SECTION 7
EXPLODED VIEWS

NOTE:
- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " ★ " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

7-1. CHASSIS

●: BVTP 3 × 8	7-685-646-79
▲: BVTP 3 × 12	7-685-648-79
■: +P 4 × 25	7-685-567-09
○: BVTT 4 × 8	7-682-561-09
△: +PS 3 × 12	7-682-650-09

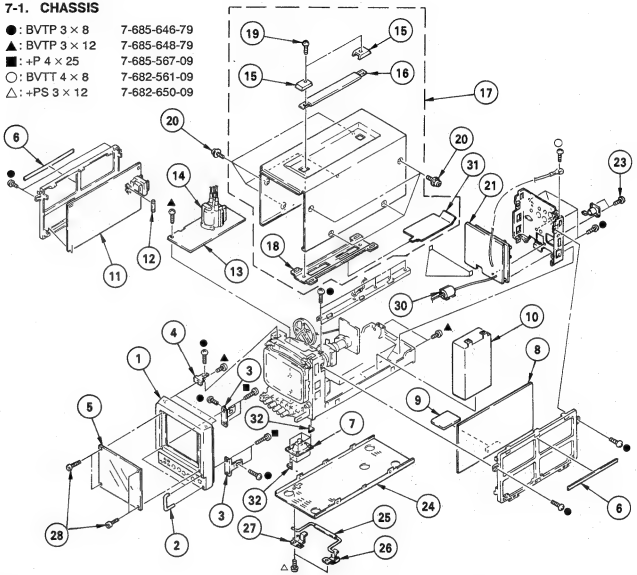

REF.NO.	PART NO.	DESCRIPTION	REMARK
1	X-4030-437-1	BEZEL ASSY	
2	4-034-844-01	HANDLE, PROTECTOR	
3	*4-034-845-01	BRACKET (L), BEZEL	
4	*4-034-846-01	BRACKET (U), BEZEL	
5	4-036-714-01	PROTECTOR	
6	*4-035-691-01	CLOTH, VIBRATION PROOF	
7	1-544-252-11	SPEAKER	
8	*A-1135-726-A	B BOARD, COMPLETE	
9	*A-1394-392-A	S BOARD, COMPLETE	
10	⚠ 1-413-720-21	SWITCHING REGULATOR (SOPS-102J)	
11	*A-1346-067-A	D BOARD, COMPLETE	
12	⚠ 1-576-235-11	FUSE (M.S.C.) (5A/250V)	
13	*A-1195-057-A	P BOARD, COMPLETE	
14	⚠ 1-439-526-11	TRANSFORMER ASSY, FLYBACK	
15	4-034-847-01	HANDLE (BASE)	
16	3-419-372-31	HANDLE	
17	*X-4030-439-1	CABINET ASSY	15, 16, 17, 18, 19, 31
18	*X-4030-273-1	REINFORCEMENT ASSY, HANDLE	
19	4-035-452-01	SCREW (M4X10)	
20	4-034-834-01	SCREW (CLAW) (4X6), CASE	
21	*A-1275-104-A	QB BOARD, COMPLETE	
22	*4-036-721-01	CHASSIS, R	
23	4-035-802-01	SCREW (M2.6X.6)	
24	*4-036-723-01	CABINET, BOTTOM	
25	4-036-695-01	STAND	
26	4-036-696-01	BRACKET (R), STAND	
27	4-036-697-01	BRACKET (L), STAND	
28	4-391-849-01	SCREW (3X12), TAPPING	
30	1-543-925-11	CORE, FERRITE	
31	4-037-556-01	INSULATOR (FBT)	
32	4-037-348-01	CUSHION, SPEAKER	

7-2. PICTURE TUBE

▲: BVTP 3 × 12 7-685-648-79
□: PSW 3 × 10 7-682-649-09

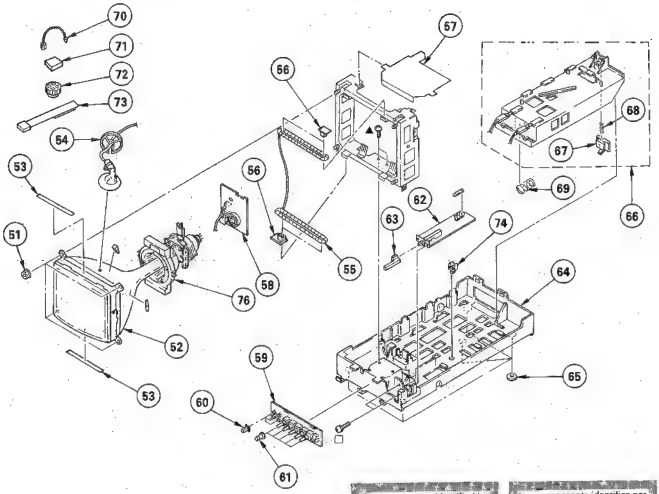

The components identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION	REMARK
51	4-304-511-00	FLANGE NUT, 5MM	
52	⚠ 8-733-921-05	CRT,06JV	
53	4-036-700-01	CLOTH, PROTECTION	
54	*4-034-856-01	HOLDER, HV CABLE	
55	⚠ 1-426-614-11	COIL, DEMAGNETIZATION	
56	4-380-534-01	CAP, DGC	
57	*4-036-713-01	INSULATOR	
58	*1-644-019-11	CB BOARD	
59	*1-644-020-11	HB BOARD	
60	4-034-849-01	SWITCH (SMALL), PUSH	
61	X-4030-162-1	KNOB ASSY, CONTROL	
62	*1-644-021-11	FC BOARD	
63	4-034-841-01	SWITCH, POWER	
64	*X-4030-438-1	CHASSIS ASSY, BOTTOM	
65	4-034-840-01	RUBBER, FOOT	
66	*X-4030-163-1	GUIDE ASSY, BATTERY	67, 68
67	4-034-861-01	KNOB, BATTERY	
68	4-876-347-01	SPRING, COMPRESSION	
69	3-669-594-00	SPRING, COMPRESSION	
70	4-908-870-00	CLIP, LEAD WIRE	
71	1-452-126-11	MAGNET	
72	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM φ	
73	X-4308-815-0	PERMALLOY ASSY, CONVERGENCE	
74	*4-314-320-00	HOLDER, WIRE	
76	⚠ 1-451-325-11	DEFLECTION YOKE (Y06JVA2)	

SECTION 8
ELECTRICAL PARTS LIST

NOTE:

The components identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

- Items marked " + " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

RESISTORS
- All resistors are in ohms
- F : nonflammable

When indicating parts by reference number, please include the board name.

CAPACITORS
- MF : μF, PF : μμF

COILS
- MMH : mH, UH : μH

- The components identified by ⚠ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

REF.NO.	PART NO.	DESCRIPTION			REMARK
	*A-1135-726-A	B BOARD, COMPLETE **********			
	*3-738-015-01	COVER, (DIA. 6) CARBON VR			
		<FILTER>			
BPF101	1-236-363-11	FILTER, BAND PASS			
BPF102	1-236-364-11	FILTER, BAND PASS			
		<CAPACITOR>			
C101	1-124-589-11	ELECT	47MF	20%	16V
C102	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C103	1-126-157-11	ELECT	10MF	20%	16V
C106	1-124-477-11	ELECT	47MF	20%	16V
C107	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C108	1-124-477-11	ELECT	47MF	20%	16V
C109	1-124-477-11	ELECT	47MF	20%	16V
C110	1-124-120-11	ELECT	220MF	20%	16V
C111	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C112	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C113	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C114	1-124-477-11	ELECT	47MF	20%	16V
C115	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C116	1-124-589-11	ELECT	47MF	20%	16V
C117	1-126-154-11	ELECT	47MF	20%	6.3V
C118	1-126-154-11	ELECT	47MF	20%	6.3V
C119	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C120	1-126-154-11	ELECT	47MF	20%	6.3V
C121	1-124-477-11	ELECT	47MF	20%	16V
C122	1-124-477-11	ELECT	47MF	20%	16V
C123	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C125	1-126-154-11	ELECT	47MF	20%	6.3V
C126	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C128	1-126-154-11	ELECT	47MF	20%	6.3V
C129	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C130	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C131	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C132	1-124-589-11	ELECT	47MF	20%	16V
C133	1-124-589-11	ELECT	47MF	20%	16V
C134	1-163-275-11	CERAMIC CHIP	0.001MF	5%	50V
C135	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C137	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C138	1-124-589-11	ELECT	47MF	20%	16V
C139	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C140	1-163-205-00	CERAMIC CHIP	0.001MF	5%	50V
C141	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C142	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C143	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C144	1-163-101-00	CERAMIC CHIP	22PF	5%	50V
C145	1-163-131-00	CERAMIC CHIP	390PF	5%	50V
C146	1-126-157-11	ELECT	10MF	20%	16V
C147	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C148	1-126-160-11	ELECT	1MF	20%	50V
C149	1-163-022-00	CERAMIC CHIP	0.012MF	10%	50V
C150	1-124-589-11	ELECT	47MF	20%	16V
C151	1-163-131-00	CERAMIC CHIP	390PF	5%	50V
C152	1-163-101-00	CERAMIC CHIP	22PF	5%	50V
C153	1-163-125-00	CERAMIC CHIP	220PF	5%	50V
C154	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C155	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C156	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C157	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C158	1-124-477-11	ELECT	47MF	20%	16V
C159	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C160	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C161	1-124-902-00	ELECT	0.47MF	20%	50V
C162	1-124-903-11	ELECT	1MF	20%	50V
C163	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C164	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C165	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C166	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C167	1-124-477-11	ELECT	47MF	20%	16V
C168	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C169	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C170	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C171	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C172	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C173	1-124-589-11	ELECT	47MF	20%	16V
C174	1-124-477-11	ELECT	47MF	20%	16V
C175	1-108-792-11	MYLAR	0.001MF	5%	50V
C176	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C177	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C178	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C179	1-126-160-11	ELECT	1MF	20%	50V
C180	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C181	1-126-154-11	ELECT	47MF	20%	6.3V
C182	1-126-163-11	ELECT	4.7MF	20%	16V
C183	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C184	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C185	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C186	1-163-099-00	CERAMIC CHIP	18PF	5%	50V
C187	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C188	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C189	1-163-035-00	CERAMIC CHIP	0.047MF		50V
C190	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C191	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C192	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C193	1-124-589-11	ELECT	47MF	20%	16V
C194	1-124-589-11	ELECT	47MF	20%	16V
C195	1-124-589-11	ELECT	47MF	20%	16V

REF.NO.	PART NO.	DESCRIPTION			REMARK
C196	1-124-589-11	ELECT	47MF	20%	16V
C197	1-124-589-11	ELECT	47MF	20%	16V
C198	1-124-589-11	ELECT	47MF	20%	16V
C199	1-124-589-11	ELECT	47MF	20%	16V
C202	1-124-589-11	ELECT	47MF	20%	16V
C203	1-124-589-11	ELECT	47MF	20%	16V
C204	1-124-589-11	ELECT	47MF	20%	16V
C205	1-163-101-00	CERAMIC CHIP	22PF	5%	50V
C206	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C207	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C208	1-163-101-00	CERAMIC CHIP	22PF	5%	50V
C209	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C210	1-124-589-11	ELECT	47MF	20%	16V
C211	1-124-589-11	ELECT	47MF	20%	16V
C212	1-124-589-11	ELECT	47MF	20%	16V
C213	1-124-589-11	ELECT	47MF	20%	16V
C214	1-126-157-11	ELECT	10MF	20%	16V
C215	1-126-157-11	ELECT	10MF	20%	16V
C216	1-126-157-11	ELECT	10MF	20%	16V
C217	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C218	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C219	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C220	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C221	1-124-903-11	ELECT	1MF	20%	50V
C222	1-163-093-00	CERAMIC CHIP	10PF	5%	50V
C223	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C225	1-124-477-11	ELECT	47MF	20%	16V
C226	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C227	1-163-038-00	CERAMIC CHIP	0.1MF		25V
C228	1-163-986-00	CERAMIC CHIP	0.027MF	10%	25V
C229	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C230	1-163-038-00	CERAMIC CHIP	0.1MF		25V
C231	1-163-986-00	CERAMIC CHIP	0.027MF	10%	25V
C232	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C233	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C234	1-163-038-00	CERAMIC CHIP	0.1MF		25V
C235	1-163-986-00	CERAMIC CHIP	0.027MF	10%	25V
C236	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C237	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C238	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C239	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C240	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C241	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C242	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C243	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C244	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C245	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C246	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C247	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C248	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C249	1-126-101-11	ELECT	100MF	20%	16V
C250	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C251	1-110-364-11	MYLAR	0.1MF	10%	200V
C252	1-124-046-00	ELECT	10MF	20%	160V
C253	1-124-477-11	ELECT	47MF	20%	16V
C254	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C255	1-124-477-11	ELECT	47MF	20%	16V
C256	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C257	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C258	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C260	1-124-465-00	ELECT	0.47MF	20%	50V
C261	1-137-193-11	FILM	0.39MF	5%	50V
C262	1-124-465-00	ELECT	0.47MF	20%	50V
C263	1-163-031-11	CERAMIC CHIP	0.01MF		50V

REF.NO.	PART NO.	DESCRIPTION			REMARK
C264	1-163-123-00	CERAMIC CHIP	180PF	5%	50V
C265	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C266	1-126-320-11	ELECT	10MF	20%	16V
C267	1-126-320-11	ELECT	10MF	20%	16V
C268	1-124-477-11	ELECT	47MF	20%	16V
C269	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C270	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C271	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C272	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C273	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C274	1-124-477-11	ELECT	47MF	20%	16V
C275	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C277	1-163-097-00	CERAMIC CHIP	15PF	5%	50V
C278	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C279	1-126-157-11	ELECT	10MF	20%	16V
C280	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C281	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C282	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C283	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C299	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C300	1-126-157-11	ELECT	10MF	20%	16V
C301	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C302	1-124-589-11	ELECT	47MF	20%	16V
C303	1-126-157-11	ELECT	10MF	20%	16V
C304	1-163-125-00	CERAMIC CHIP	220PF	5%	50V
C305	1-124-257-00	ELECT	2.2MF	20%	50V
C306	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C307	1-163-145-00	CERAMIC CHIP	0.0015MF	5%	50V
C308	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C309	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C310	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C313	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C314	1-126-157-11	ELECT	10MF	20%	16V
C315	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C316	1-126-157-11	ELECT	10MF	20%	16V
C317	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C318	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C319	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C320	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C321	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C322	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C324	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C340	1-163-205-00	CERAMIC CHIP	0.001MF	5%	50V
C344	1-163-092-00	CERAMIC CHIP	9PF	0.25PF	50V
C345	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C346	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C347	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C1293	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C1294	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C1295	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C1296	1-163-107-00	CERAMIC CHIP	39PF	5%	50V
C1297	1-163-099-00	CERAMIC CHIP	18PF	5%	50V
C1298	1-163-109-00	CERAMIC CHIP	47PF	5%	50V
C1299	1-163-093-00	CERAMIC CHIP	10PF	5%	50V
C1300	1-126-160-11	ELECT	1MF	20%	50V
C1301	1-126-160-11	ELECT	1MF	20%	50V
C1302	1-126-160-11	ELECT	1MF	20%	50V

<FILTER BLOCK>

CFM101	1-464-880-11	FILTER BLOCK, COM (CFB-2)	

REF.NO.	PART NO.	DESCRIPTION	REMARK
		<CONNECTOR>	
CN101	1-506-478-11	PIN, CONNECTOR 13P	
CN102	*1-564-506-11	PLUG, CONNECTOR 3P	
CN103	*1-565-503-11	CONNECTOR, BOARD TO BOARD 12P	
CN104	1-506-477-11	PIN, CONNECTOR 12P	
CN105	*1-564-509-11	PLUG, CONNECTOR 6P	
CN107	1-506-478-11	PIN, CONNECTOR 13P	
		<TRAP MODULE>	
CTR101	1-236-366-11	MODULE, TRAP	
CTR102	1-236-365-11	MODULE, TRAP	
		<TRIMMER>	
CV101	1-141-418-11	CAP, ADJ	
CV102	1-141-418-11	CAP, ADJ	
		<DIODE>	
D101	8-719-404-46	DIODE MA110	
D102	8-719-404-46	DIODE MA110	
D104	8-719-404-46	DIODE MA110	
D105	8-719-404-46	DIODE MA110	
D106	8-719-404-46	DIODE MA110	
D107	8-719-404-46	DIODE MA110	
D108	8-719-404-46	DIODE MA110	
D109	8-719-404-46	DIODE MA110	
D110	8-719-404-46	DIODE MA110	
D111	8-719-404-46	DIODE MA110	
D112	8-719-404-46	DIODE MA110	
D113	8-719-404-46	DIODE MA110	
D114	8-719-404-46	DIODE MA110	
D115	8-719-404-46	DIODE MA110	
D116	8-719-404-46	DIODE MA110	
D117	8-719-404-46	DIODE MA110	
D118	8-719-404-46	DIODE MA110	
D119	8-719-404-46	DIODE MA110	
D120	8-719-404-46	DIODE MA110	
D121	8-719-404-46	DIODE MA110	
D122	8-719-404-46	DIODE MA110	
D123	8-719-404-46	DIODE MA110	
D125	8-719-404-46	DIODE MA110	
D126	8-719-404-46	DIODE MA110	
D127	8-719-404-46	DIODE MA110	
D128	8-719-400-18	DIODE MA152WK	
D129	8-719-404-46	DIODE MA110	
D130	8-719-800-76	DIODE 1SS226	
D131	8-719-800-76	DIODE 1SS226	
D132	8-719-800-76	DIODE 1SS226	
D133	8-719-404-46	DIODE MA110	
D134	8-719-404-46	DIODE MA110	
D135	8-719-404-46	DIODE MA110	
D136	8-719-404-46	DIODE MA110	
D137	8-719-404-46	DIODE MA110	
D138	8-719-404-46	DIODE MA110	
D139	8-719-404-46	DIODE MA110	
D142	8-719-404-46	DIODE MA110	
D143	8-719-404-46	DIODE MA110	
D144	8-719-404-46	DIODE MA110	
D145	8-719-404-46	DIODE MA110	
D146	8-719-404-46	DIODE MA110	
D147	8-719-404-46	DIODE MA110	
D148	8-719-404-46	DIODE MA110	
D149	8-719-404-46	DIODE MA110	
D150	8-719-404-46	DIODE MA110	
D151	8-719-404-46	DIODE MA110	
D152	8-719-404-46	DIODE MA110	
D153	8-719-977-20	DIODE DTZ8.2B	
D154	8-719-404-46	DIODE MA110	
D155	8-719-404-46	DIODE MA110	
D156	8-719-404-46	DIODE MA110	
D157	8-719-901-83	DIODE 1SS83	
D158	8-719-901-83	DIODE 1SS83	
D159	8-719-901-83	DIODE 1SS83	
D160	8-719-404-46	DIODE MA110	
D161	8-719-404-46	DIODE MA110	
D162	8-719-404-46	DIODE MA110	
D170	8-719-404-46	DIODE MA110	
D171	8-719-404-46	DIODE MA110	
D172	8-719-404-46	DIODE MA110	
D285	8-719-404-46	DIODE MA110	
D289	8-719-404-46	DIODE MA110	
D341	8-719-404-46	DIODE MA110	
D342	8-719-104-34	DIODE 1S2836	
D343	8-719-800-76	DIODE 1SS226	
D344	8-719-105-XX	DIODE RD6.2M-B1	
D345	8-719-901-83	DIODE 1SS83	
D346	8-719-901-83	DIODE 1SS83	
D347	8-719-901-83	DIODE 1SS83	
D348	8-719-800-76	DIODE 1SS226	
D349	8-719-800-76	DIODE 1SS226	
D350	8-719-800-76	DIODE 1SS226	
D393	8-719-404-46	DIODE MA110	
		<DELAY LINE>	
DL101	1-415-632-11	DELAY LINE, Y	
		<IC>	
IC102	8-759-501-21	IC MM1149XF	
IC103	8-759-501-21	IC MM1149XF	
IC104	8-759-048-09	IC MM1148XF	
IC105	8-759-048-09	IC MM1148XF	
IC106	8-759-009-51	IC MC14538BF	
IC107	8-759-509-57	IC XRU4584BF	
IC108	8-759-509-17	IC XRU4053BF	
IC109	8-759-509-37	IC XRU4070BF	
IC110	8-759-509-17	IC XRU4053BF	
IC111	8-759-509-17	IC XRU4053BF	
IC112	8-759-924-12	IC LM7805CT	
IC113	8-759-631-08	IC M51279FP	
IC114	8-759-509-13	IC XRU4052BF	
IC115	8-759-509-13	IC XRU4052BF	
IC116	8-759-509-05	IC XRU4066BF	
IC117	8-759-711-32	IC NJM2245M	
IC118	8-759-711-32	IC NJM2245M	
IC119	8-759-711-32	IC NJM2245M	
IC120	8-759-509-05	IC XRU4066BF	
IC121	8-759-509-17	IC XRU4053BF	
IC122	8-759-998-98	IC LM358D	
IC123	8-759-998-98	IC LM358D	
IC124	8-752-052-62	IC CXA1478S	
IC125	8-759-509-05	IC XRU4066BF	
IC126	8-759-509-17	IC XRU4053BF	

REF.NO.	PART NO.	DESCRIPTION	REMARK
IC127	8-759-998-98	IC LM358D	
IC128	8-759-998-98	IC LM358D	
IC129	8-759-998-98	IC LM358D	
		<COIL>	
L101	1-410-470-11	INDUCTOR 10UH	
L102	1-410-090-41	INDUCTOR 180MH	
L103	1-412-002-31	INDUCTOR CHIP 4.7UH	
L104	1-412-002-31	INDUCTOR CHIP 4.7UH	
L105	1-412-002-31	INDUCTOR CHIP 4.7UH	
L106	1-410-470-11	INDUCTOR 10UH	
L107	1-410-470-11	INDUCTOR 10UH	
L108	1-408-418-00	INDUCTOR 56UH	
L109	1-408-418-00	INDUCTOR 56UH	
L110	1-408-418-00	INDUCTOR 56UH	
L112	1-408-419-00	INDUCTOR 68UH	
L116	1-412-011-31	INDUCTOR CHIP 27UH	
L117	1-412-011-31	INDUCTOR CHIP 27UH	
L118	1-412-011-31	INDUCTOR CHIP 27UH	
L250	1-410-997-31	INDUCTOR CHIP 2.2UH	
L251	1-410-999-11	INDUCTOR CHIP 3.3UH	
L252	1-410-478-11	INDUCTOR 47UH	
L300	1-410-482-31	INDUCTOR 100UH	
		<TRANSISTOR>	
Q101	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q102	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q103	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q104	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q106	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q107	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q108	8-729-216-22	TRANSISTOR 2SA1162-G	
Q109	8-729-901-01	TRANSISTOR DTC144EK	
Q112	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q113	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q114	8-729-216-22	TRANSISTOR 2SA1162-G	
Q115	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q116	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q117	8-729-216-22	TRANSISTOR 2SA1162-G	
Q118	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q119	8-729-216-22	TRANSISTOR 2SA1162-G	
Q120	8-729-216-22	TRANSISTOR 2SA1162-G	
Q121	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q122	8-729-216-22	TRANSISTOR 2SA1162-G	
Q123	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q124	8-729-216-22	TRANSISTOR 2SA1162-G	
Q125	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q126	8-729-901-01	TRANSISTOR DTC144EK	
Q127	8-729-216-22	TRANSISTOR 2SA1162-G	
Q128	8-729-216-22	TRANSISTOR 2SA1162-G	
Q129	8-729-901-01	TRANSISTOR DTC144EK	
Q130	8-729-216-22	TRANSISTOR 2SA1162-G	
Q131	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q132	8-729-216-22	TRANSISTOR 2SA1162-G	
Q133	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q134	8-729-901-01	TRANSISTOR DTC144EK	
Q135	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q136	8-729-907-26	TRANSISTOR 1MX1	
Q137	8-729-907-26	TRANSISTOR 1MX1	
Q138	8-729-907-26	TRANSISTOR 1MX1	
Q139	8-729-216-22	TRANSISTOR 2SA1162-G	
Q140	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q141	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q142	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q143	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q144	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q145	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q146	8-729-255-12	TRANSISTOR 2SC2551-O	
Q147	8-729-255-12	TRANSISTOR 2SC2551-O	
Q148	8-729-216-22	TRANSISTOR 2SA1162-G	
Q149	8-729-200-17	TRANSISTOR 2SA1091-O	
Q150	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q151	8-729-216-22	TRANSISTOR 2SA1162-G	
Q152	8-729-200-17	TRANSISTOR 2SA1091-O	
Q153	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q154	8-729-216-22	TRANSISTOR 2SA1162-G	
Q155	8-729-200-17	TRANSISTOR 2SA1091-O	
Q157	8-729-326-11	TRANSISTOR 2SC2611	
Q158	8-729-326-11	TRANSISTOR 2SC2611	
Q159	8-729-326-11	TRANSISTOR 2SC2611	
Q160	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q161	8-729-216-22	TRANSISTOR 2SA1162-G	
Q162	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q163	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q164	8-729-901-01	TRANSISTOR DTC144EK	
Q165	8-729-216-22	TRANSISTOR 2SA1162-G	
Q166	8-729-216-22	TRANSISTOR 2SA1162-G	
Q167	8-729-216-22	TRANSISTOR 2SA1162-G	
Q168	8-729-216-22	TRANSISTOR 2SA1162-G	
Q170	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q171	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q172	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q173	8-729-216-22	TRANSISTOR 2SA1162-G	
Q174	8-729-216-22	TRANSISTOR 2SA1162-G	
Q175	8-729-216-22	TRANSISTOR 2SA1162-G	
Q176	8-729-216-22	TRANSISTOR 2SA1162-G	
Q177	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q179	8-729-901-01	TRANSISTOR DTC144EK	
Q190	8-729-216-22	TRANSISTOR 2SA1162-G	
Q191	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q192	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q193	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q194	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q195	8-729-216-22	TRANSISTOR 2SA1162-G	
Q196	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q197	8-729-216-22	TRANSISTOR 2SA1162-G	
Q198	8-729-216-22	TRANSISTOR 2SA1162-G	
Q199	8-729-216-22	TRANSISTOR 2SA1162-G	
Q200	8-729-901-06	TRANSISTOR DTA144EK	
Q201	8-729-216-22	TRANSISTOR 2SA1162-G	
Q202	8-729-216-22	TRANSISTOR 2SA1162-G	
Q203	8-729-216-22	TRANSISTOR 2SA1162-G	
Q204	8-729-216-22	TRANSISTOR 2SA1162-G	
Q205	8-729-216-22	TRANSISTOR 2SA1162-G	
Q206	8-729-216-22	TRANSISTOR 2SA1162-G	
Q208	8-729-216-22	TRANSISTOR 2SA1162-G	
Q209	8-729-255-12	TRANSISTOR 2SC2551-O	
Q210	8-729-255-12	TRANSISTOR 2SC2551-O	
Q211	8-729-255-12	TRANSISTOR 2SC2551-O	
Q212	8-729-109-44	TRANSISTOR 2SK94-X4	
Q299	8-729-920-74	TRANSISTOR 2SC2412K-QR	
		<RESISTOR>	
JR101	1-216-295-00	METAL GLAZE 0 5% 1/10W	

B

REF.NO.	PART NO.	DESCRIPTION				REMARK
JR105	1-216-295-00	METAL GLAZE	0	5%	1/10W	
JR118	1-216-295-00	METAL GLAZE	0	5%	1/10W	
JR132	1-216-295-00	METAL GLAZE	0	5%	1/10W	
JR133	1-216-295-00	METAL GLAZE	0	5%	1/10W	
JR178	1-216-295-00	METAL GLAZE	0	5%	1/10W	
L113	1-216-296-00	METAL GLAZE	0	5%	1/8W	
L114	1-216-296-00	METAL GLAZE	0	5%	1/8W	
L115	1-216-296-00	METAL GLAZE	0	5%	1/8W	
R101	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R102	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R103	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R104	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R105	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R106	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R107	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R108	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R109	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R110	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R111	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R112	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R113	1-249-401-11	CARBON	47	5%	1/4W	F
R114	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R115	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R117	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R118	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R119	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R120	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R121	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R123	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R124	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R125	1-216-083-00	METAL GLAZE	27K	5%	1/10W	
R126	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R127	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R128	1-216-083-00	METAL GLAZE	27K	5%	1/10W	
R129	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R130	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R136	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R137	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R138	1-216-657-11	METAL CHIP	1.8K	0.50%	1/10W	
R139	1-216-079-00	METAL GLAZE	18K	5%	1/10W	
R140	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R141	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R142	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R143	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R144	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R145	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R146	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R148	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R155	1-216-655-11	METAL CHIP	1.5K	0.50%	1/10W	
R157	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R158	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R160	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R161	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R163	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R164	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R165	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R166	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R167	1-216-635-11	METAL CHIP	220	0.50%	1/10W	
R168	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R169	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R170	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R171	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W	
R172	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R173	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R174	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R175	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R176	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R177	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R178	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R179	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R180	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R181	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W	
R182	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R183	1-216-691-11	METAL CHIP	47K	0.50%	1/10W	
R184	1-216-699-11	METAL CHIP	100K	0.50%	1/10W	
R185	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R186	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R187	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R188	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R189	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R190	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R191	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R192	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R193	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R194	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R195	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R196	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R197	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R198	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R199	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R200	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R201	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R202	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R203	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R204	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R205	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R206	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R207	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R208	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R209	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R210	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R211	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R212	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R213	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R214	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R215	1-216-125-00	METAL GLAZE	1.5M	5%	1/10W	
R216	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R217	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R218	1-216-295-00	METAL GLAZE	0	5%	1/10W	
R219	1-216-045-00	METAL GLAZE	560	5%	1/10W	
R220	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R221	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R222	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R223	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R224	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R225	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R226	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R227	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R228	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R229	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R230	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R231	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R232	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R233	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R234	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R235	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R236	1-216-077-00	METAL GLAZE	15K	5%	1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R237	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R238	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R239	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R240	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R241	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R242	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R243	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R244	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R245	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R246	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R247	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R248	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R249	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R250	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R251	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R252	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R253	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R254	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R255	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R256	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R258	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R259	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R260	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R261	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R262	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R263	1-216-029-00	METAL GLAZE	150	5%	1/10W	
R264	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R265	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R266	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R267	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R268	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R269	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R270	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R271	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R272	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R273	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R275	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R276	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R277	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R278	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R279	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R280	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R281	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R282	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R283	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R284	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R285	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R286	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R287	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R288	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R289	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R290	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R291	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R292	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R293	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R295	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R296	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W	
R297	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W	
R298	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R300	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R301	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R302	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R303	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R304	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R305	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R306	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R307	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R308	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R309	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R310	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R311	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R312	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R313	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R314	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R315	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R316	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R317	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R318	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R319	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R320	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R321	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R325	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R326	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R328	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R329	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R330	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R331	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R332	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R333	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R334	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R335	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R336	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R338	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R339	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R340	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R342	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R343	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W	
R344	1-216-664-11	METAL CHIP	3.6K	0.50%	1/10W	
R345	1-216-661-11	METAL CHIP	2.7K	0.50%	1/10W	
R346	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R348	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R349	1-216-650-11	METAL CHIP	910	0.50%	1/10W	
R350	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R351	1-216-650-11	METAL CHIP	910	0.50%	1/10W	
R352	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R353	1-216-650-11	METAL CHIP	910	0.50%	1/10W	
R354	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R355	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R356	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R357	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R358	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R359	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R360	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R363	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R364	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R365	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R366	1-216-244-00	METAL GLAZE	82K	5%	1/8W	
R367	1-216-244-00	METAL GLAZE	82K	5%	1/8W	
R368	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R369	1-216-248-00	METAL GLAZE	120K	5%	1/8W	
R370	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R371	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R372	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R374	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R375	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R376	1-216-663-11	METAL CHIP	3.3K	0.50%	1/10W	
R378	1-216-025-00	METAL GLAZE	100	5%	1/10W	

B

REF.NO.	PART NO.	DESCRIPTION				REMARK
R379	1-216-641-11	METAL CHIP	390	0.50%	1/10W	
R380	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R381	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R382	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R383	1-216-641-11	METAL CHIP	390	0.50%	1/10W	
R384	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R385	1-216-117-00	METAL GLAZE	680K	5%	1/10W	
R386	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R387	1-216-641-11	METAL CHIP	390	0.50%	1/10W	
R388	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R390	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R391	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R392	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R393	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R394	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R397	1-249-437-11	CARBON	47K	5%	1/4W	F
R398	1-249-434-11	CARBON	27K	5%	1/4W	F
R399	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1001	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1002	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1003	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1004	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1005	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1006	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1007	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1008	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1009	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1010	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1011	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1012	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R1013	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R1014	1-216-246-00	METAL GLAZE	100K	5%	1/8W	
R1015	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1016	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1017	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1018	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R1019	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1020	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1021	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1022	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1023	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1024	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1025	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1026	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1027	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R1028	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1029	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1031	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1032	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1033	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1034	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1035	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1036	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1038	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1040	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1042	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1043	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1044	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1045	1-216-125-00	METAL GLAZE	1.5M	5%	1/10W	
R1046	1-216-689-11	METAL CHIP	39K	0.50%	1/10W	
R1047	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1048	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1049	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1050	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1051	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R1058	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1059	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1060	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1061	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1062	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1063	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1064	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1065	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1066	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1067	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1068	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1069	1-216-133-00	METAL GLAZE	3.9M	5%	1/10W	
R1070	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1071	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1072	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1073	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W	
R1075	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1076	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R1077	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1078	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1079	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1080	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1081	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1083	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1084	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1088	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1090	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1091	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1092	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1093	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R1094	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1095	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1096	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1200	1-216-699-11	METAL CHIP	100K	0.50%	1/10W	
R1201	1-218-754-11	METAL CHIP	120K	0.50%	1/10W	
R1207	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1208	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1220	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1221	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1222	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1223	1-216-589-11	METAL GLAZE	39K	5%	1/10W	
R1225	1-215-876-00	METAL OXIDE	15K	5%	1W	F
R1226	1-215-876-00	METAL OXIDE	15K	5%	1W	F
R1227	1-215-876-00	METAL OXIDE	15K	5%	1W	F
R1228	1-249-421-11	CARBON	2.2K	5%	1/4W	F
R1229	1-249-421-11	CARBON	2.2K	5%	1/4W	F
R1230	1-249-421-11	CARBON	2.2K	5%	1/4W	F
R1231	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1232	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1233	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1234	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1235	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1236	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1237	1-249-419-11	CARBON	1.5K	5%	1/4W	F
R1238	1-249-419-11	CARBON	1.5K	5%	1/4W	F
R1239	1-249-419-11	CARBON	1.5K	5%	1/4W	F
R1270	1-216-079-00	METAL GLAZE	18K	5%	1/10W	
R1280	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1290	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W	
R1291	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1294	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1295	1-216-109-00	METAL GLAZE	330K	5%	1/10W	

The components identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securité.
Ne les remplacer que par une piece portant le numero specifié.

REF.NO.	PART NO.	DESCRIPTION				REMARK
R1296	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R1297	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R1298	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R1299	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1300	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1301	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1302	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1303	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1304	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R1305	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R1306	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1307	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R1308	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R1309	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1310	1-216-119-00	METAL GLAZE	820K	5%	1/10W	
R1313	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R1314	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W	
R1315	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R1320	1-216-085-00	METAL GLAZE	27K	5%	1/10W	
R1321	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R1322	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R1323	1-216-059-00	METAL GLAZE	2.2K	5%	1/10W	
R1324	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R1325	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1326	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1327	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1328	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1329	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R1330	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1331	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R1332	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1333	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1334	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1335	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R1336	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1337	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1338	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1339	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1340	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1341	1-216-111-00	METAL GLAZE	390K	5%	1/10W	
R1342	1-216-694-11	METAL CHIP	62K	0.50%	1/10W	
R1343	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R1344	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1345	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1346	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1347	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1348	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1349	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1350	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1351	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1352	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1353	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R1371	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1372	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1373	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1392	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1393	1-216-109-00	METAL GLAZE	330K	5%	1/10W	

<VARIABLE RESISTOR>

RV101	1-241-763-11	RES, ADJ, CERMET 4.7K	
RV102	1-241-763-11	RES, ADJ, CERMET 4.7K	
RV103	1-238-009-11	RES, ADJ, CARBON 220	
RV104	1-238-009-11	RES, ADJ, CARBON 220	
RV105	1-238-012-11	RES, ADJ, CARBON 1K	
RV106	1-238-012-11	RES, ADJ, CARBON 1K	
RV107	1-238-012-11	RES, ADJ, CARBON 1K	
RV108	1-238-016-11	RES, ADJ, CARBON 10K	
RV109	1-241-765-21	RES, ADJ, CERMET 22K	
RV110	1-238-016-11	RES, ADJ, CARBON 10K	
RV111	1-238-016-11	RES, ADJ, CARBON 10K	
RV112	1-238-019-11	RES, ADJ, CARBON 47K	
RV113	1-238-019-11	RES, ADJ, CARBON 47K	
RV114	1-238-019-11	RES, ADJ, CARBON 47K	
RV115	1-238-017-11	RES, ADJ, CARBON 22K	
RV116	1-238-017-11	RES, ADJ, CARBON 22K	
RV118	1-238-017-11	RES, ADJ, CARBON 22K	
RV119	1-238-017-11	RES, ADJ, CARBON 22K	
RV120	1-238-017-11	RES, ADJ, CARBON 22K	
RV121	1-238-017-11	RES, ADJ, CARBON 22K	
RV122	1-238-017-11	RES, ADJ, CARBON 22K	
RV123	1-238-013-11	RES, ADJ, CARBON 2.2K	
RV124	1-238-012-11	RES, ADJ, CARBON 1K	
RV125	1-238-012-11	RES, ADJ, CARBON 1K	
RV205	1-238-017-11	RES, ADJ, CARBON 22K	

<MODULE>

SBP101	1-808-654-11	MODULE	

<CRYSTAL>

X101	1-527-722-00	OSCILLATOR, CRYSTAL	
X102	1-577-259-11	VIBRATOR, CRYSTAL	

****

*A-1190-164-A P BOARD, COMPLETE
****

*4-363-404-00	HOLDER, IC		
4-382-854-01	SCREW (M3X8), P, SW (+)		
4-879-937-00	SHEET, MICA		

<CAPACITOR>

C801	1-126-104-11	ELECT	470MF	20%	35V
C802	1-162-318-11	CERAMIC	0.001MF	10%	500V
C803	1-102-228-00	CERAMIC	470PF	10%	500V
C804	1-123-935-00	ELECT	33MF	20%	160V
C805	1-101-004-00	CERAMIC	0.01MF		50V
C806	1-124-480-11	ELECT	470MF	20%	25V
C807	1-102-228-00	CERAMIC	470PF	10%	500V
C808	1-106-367-00	MYLAR	0.01MF	10%	100V
C809	1-106-375-12	MYLAR	0.022MF	10%	100V
C810	1-162-318-11	CERAMIC	0.001MF	10%	500V
C811 ⚠	1-137-544-91	FILM	0.01MF	5%	500V
C812 ⚠	1-137-546-91	FILM	0.17MF	5%	500V
C813	1-106-385-00	MYLAR	0.05MF	5%	200V
C814	1-106-383-00	MYLAR	0.047MF	10%	100V
C815	1-126-233-11	ELECT	22MF	20%	50V
C816	1-124-798-11	ELECT	1MF	20%	160V
C817	1-130-800-00	FILM	2.2MF	10%	250V
C818	1-102-228-00	CERAMIC	470PF	10%	500V
C819	1-162-116-00	CERAMIC	680PF	10%	2KV
C820	1-162-116-00	CERAMIC	680PF	10%	2KV
C821	1-162-116-00	CERAMIC	680PF	10%	2KV

P Fc QB

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF.NO.	PART NO.	DESCRIPTION				REMARK
		<CONNECTOR>				
CN801	*1-564-595-11	PLUG, CONNECTOR 14P				
CN802	*1-508-766-00	PIN, CONNECTOR (5MM PITCH) 4P				
CN803	*1-564-508-11	PLUG, CONNECTOR 5P				
CN805	*1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P				
		<DIODE>				
D801	8-719-300-33	DIODE RU-3AM				
D802	8-719-300-33	DIODE RU-3AM				
D803	8-719-300-33	DIODE RU-3AM				
D804	8-719-979-85	DIODE EGP20G				
D805	8-719-300-33	DIODE RU-3AM				
D806	8-719-300-33	DIODE RU-3AM				
D807	8-719-105-XX	DIODE RD6.2M-B1				
D808	8-719-018-72	THYRISTOR CR02AM-4TB				
D809	8-719-911-55	DIODE UO5G				
D810	8-719-911-55	DIODE UO5G				
D811	8-719-911-55	DIODE UO5G				
D813	8-719-300-33	DIODE RU-3AM				
		<COIL>				
L802	1-459-442-00	COIL (WITH CORE)				
L803	1-422-613-11	COIL, AIR CORE				
L804	1-459-109-00	COIL, DUST CORE				
L805 ⚠	1-460-946-11	COIL, HORIZONTAL LINEARITY				
L806	1-414-099-11	INDUCTOR, MICRO				
L807	1-414-099-11	INDUCTOR, MICRO				
		<NEON LAMP>				
NL801	1-519-108-XX	LAMP, NEON				
		<TRANSISTOR>				
Q801	8-729-195-82	TRANSISTOR 2SC2958-L				
Q802	8-729-201-62	TRANSISTOR 2SC2555-2				
Q803	8-729-906-24	TRANSISTOR 2SD835				
		<RESISTOR>				
R801	1-249-383-11	CARBON	1.5	5%	1/4W	F
R802	1-249-377-11	CARBON	0.47	5%	1/4W	F
R803	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R804	1-249-419-11	CARBON	1.5K	5%	1/4W	F
R805	1-215-892-11	METAL OXIDE	1K	5%	2W	F
R807	1-216-425-11	METAL OXIDE	56	5%	1W	F
R808	1-202-846-00	SOLID	470K	20%	1/2W	
R809	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R810	1-249-421-11	CARBON	2.2K	5%	1/4W	F
R811	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R812	1-249-439-11	CARBON	68K	5%	1/4W	F
R813	1-249-414-11	CARBON	560	5%	1/4W	F
R814	1-249-377-11	CARBON	0.47	5%	1/4W	F
		<VARIABLE RESISTOR>				
RV801	1-223-102-00	RES, ADJ, WIREWOUND 120				
		<TRANSFORMER>				
T801	1-437-082-31	HDT				
T802 ⚠	1-439-526-11	TRANSFORMER ASSY, FLYBACK				
	*1-644-021-11	PC BOARD				
		*******				
	*4-341-751-01	EYELET EY3,EY4				
	*4-341-752-01	EYELET EY1,EY2,EY3,EY4				
		<CONNECTOR>				
CN601	*1-580-689-11	PIN, CONNECTOR (PC BOARD) 4P				
CN602	*1-508-765-00	PIN, CONNECTOR (5MM PITCH) 3P				
CN603	*1-564-507-11	PLUG, CONNECTOR 4P				
		<FUSE>				
F601 ⚠	1-576-230-11	FUSE (E.R.C) (3.15A/250V)				
	1-533-223-11	CLIP, FUSE; F601				
		<RESISTOR>				
R602	1-202-721-00	SOLID	1.5K	20%	1/2W	
		<SWITCH>				
S601 ⚠	1-692-050-11	SWITCH, PUSH (AC POWER) (KEY)				
	*A-1275-104-A	QB BOARD, COMPLETE				
		**********				
	1-537-434-11	TERMINAL BOARD, INPUT/OUTPUT				
	*4-341-752-01	EYELET EY8,EY9				
		<CAPACITOR>				
C401	1-124-234-00	ELECT	22MF	20%	16V	
C402	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C405	1-124-234-00	ELECT	22MF	20%	16V	
C409	1-124-234-00	ELECT	22MF	20%	16V	
C410	1-124-234-00	ELECT	22MF	20%	16V	
C411	1-124-234-00	ELECT	22MF	20%	16V	
C412	1-124-234-00	ELECT	22MF	20%	16V	
C414	1-126-157-11	ELECT	10MF	20%	16V	
C415	1-126-157-11	ELECT	10MF	20%	16V	
C418	1-126-157-11	ELECT	10MF	20%	16V	
C419	1-126-157-11	ELECT	10MF	20%	16V	
C420	1-126-157-11	ELECT	10MF	20%	16V	
C421	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C422	1-124-464-11	ELECT	0.22MF	20%	50V	
C423	1-126-157-11	ELECT	10MF	20%	16V	
C424	1-126-157-11	ELECT	10MF	20%	16V	
C425	1-108-634-11	MYLAR	0.047MF	10%	100V	
C426	1-128-499-11	ELECT	220MF	20%	16V	
C427	1-128-499-11	ELECT	220MF	20%	16V	
C428	1-128-499-11	ELECT	220MF	20%	16V	
C429	1-124-234-00	ELECT	22MF	20%	16V	
C430	1-163-033-00	CERAMIC CHIP	0.022MF		50V	
C438	1-124-234-00	ELECT	22MF	20%	16V	
C439	1-163-033-00	CERAMIC CHIP	0.022MF		50V	
C440	1-163-033-00	CERAMIC CHIP	0.022MF		50V	
C441	1-124-234-00	ELECT	22MF	20%	16V	
C442	1-163-033-00	CERAMIC CHIP	0.022MF		50V	

REF.NO.	PART NO.	DESCRIPTION		REMARK
C443	1-163-033-00	CERAMIC CHIP 0.022MF		50V
C444	1-163-033-00	CERAMIC CHIP 0.022MF		50V
C445	1-163-031-11	CERAMIC CHIP 0.01MF		50V
C447	1-163-031-11	CERAMIC CHIP 0.01MF		50V
C448	1-124-234-00	ELECT 22MF	20%	16V
C449	1-124-234-00	ELECT 22MF	20%	16V
C450	1-124-234-00	ELECT 22MF	20%	16V
C451	1-163-033-00	CERAMIC CHIP 0.022MF		50V
C452	1-128-499-11	ELECT 220MF	20%	16V
C453	1-128-499-11	ELECT 220MF	20%	16V
C454	1-126-301-11	ELECT 1MF	20%	50V
C455	1-126-301-11	ELECT 1MF	20%	50V
C456	1-126-301-11	ELECT 1MF	20%	50V
C458	1-163-031-11	CERAMIC CHIP 0.01MF		50V
C459	1-163-038-00	CERAMIC CHIP 0.1MF		25V
C460	1-163-038-00	CERAMIC CHIP 0.1MF		25V
		<CONNECTOR>		
CN401	*1-506-492-11	PIN, CONNECTOR 13P		
CN402	*1-564-518-11	PLUG, CONNECTOR 3P		
CN403	*1-580-690-11	PIN, CONNECTOR (PC BOARD) 4P		
CN404	*1-564-519-11	PLUG, CONNECTOR 4P		
		<DIODE>		
D403	8-719-110-09	DIODE RD8.2ESB3		
D404	8-719-404-46	DIODE MA110		
D405	8-719-404-46	DIODE MA110		
D408	8-719-404-46	DIODE MA110		
D409	8-719-404-46	DIODE MA110		
D410	8-719-404-46	DIODE MA110		
D411	8-719-404-46	DIODE MA110		
D412	8-719-404-46	DIODE MA110		
D413	8-719-404-46	DIODE MA110		
D414	8-719-404-46	DIODE MA110		
D415	8-719-404-46	DIODE MA110		
D416	8-719-404-46	DIODE MA110		
D417	8-719-404-46	DIODE MA110		
D418	8-719-404-46	DIODE MA110		
D419	8-719-404-46	DIODE MA110		
D420	8-719-404-46	DIODE MA110		
D421	8-719-404-46	DIODE MA110		
D422	8-719-404-46	DIODE MA110		
D423	8-719-404-46	DIODE MA110		
D424	8-719-404-46	DIODE MA110		
D425	8-719-404-46	DIODE MA110		
		<IC>		
IC402	8-759-501-21	IC MK1149XF		
IC403	8-759-420-04	IC AN5265		
		<COIL>		
L401	1-410-682-31	INDUCTOR 470UH		
L402	1-410-682-31	INDUCTOR 470UH		
		<TRANSISTOR>		
Q401	8-729-216-22	TRANSISTOR 2SA1162-G		
Q402	8-729-901-06	TRANSISTOR DTA144EK		
Q403	8-729-901-06	TRANSISTOR DTA144EK		
Q404	8-729-901-06	TRANSISTOR DTA144EK		
Q405	8-729-901-01	TRANSISTOR DTC144EK		
Q406	8-729-920-74	TRANSISTOR 2SC2412K-QR		
Q407	8-729-920-74	TRANSISTOR 2SC2412K-QR		
Q409	8-729-920-74	TRANSISTOR 2SC2412K-QR		
Q410	8-729-920-74	TRANSISTOR 2SC2412K-QR		
Q412	8-729-216-22	TRANSISTOR 2SA1162-G		
Q414	8-729-216-22	TRANSISTOR 2SA1162-G		
Q416	8-729-145-18	TRANSISTOR 2SC3736		
Q417	8-729-901-06	TRANSISTOR DTA144EK		
Q418	8-729-920-74	TRANSISTOR 2SC2412K-QR		
Q419	8-729-901-06	TRANSISTOR DTA144EK		
Q420	8-729-901-06	TRANSISTOR DTA144EK		
Q425	8-729-901-01	TRANSISTOR DTC144EK		
		<RESISTOR>		
JR401	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR402	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR403	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR404	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR406	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR407	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR408	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR409	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR410	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR411	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR412	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR413	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR414	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR415	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR416	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR417	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR418	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR419	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR422	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR424	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR425	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR426	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR427	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR428	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR430	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR431	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR432	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR434	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR436	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR437	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR438	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR439	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR440	1-216-296-00	METAL GLAZE 0	5%	1/8W
JR441	1-216-296-00	METAL GLAZE 0	5%	1/8W
R401	1-214-702-00	METAL 75	1%	1/4W
R402	1-216-049-00	METAL GLAZE 1K	5%	1/10W
R403	1-216-091-00	METAL GLAZE 56K	5%	1/10W
R404	1-216-093-00	METAL GLAZE 68K	5%	1/10W
R405	1-216-061-00	METAL GLAZE 3.3K	5%	1/10W
R416	1-216-029-00	METAL GLAZE 150	5%	1/10W
R418	1-216-089-00	METAL GLAZE 47K	5%	1/10W
R419	1-216-089-00	METAL GLAZE 47K	5%	1/10W
R420	1-216-089-00	METAL GLAZE 47K	5%	1/10W
R421	1-216-097-00	METAL GLAZE 100K	5%	1/10W
R422	1-216-089-00	METAL GLAZE 47K	5%	1/10W
R429	1-214-702-00	METAL 75	1%	1/4W
R430	1-216-049-00	METAL GLAZE 1K	5%	1/10W

QB CB D

REF.NO.	PART NO.	DESCRIPTION				REMARK
R431	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R432	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R433	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R434	1-216-027-00	METAL GLAZE	120	5%	1/10W	
R435	1-214-702-00	METAL	75	1%	1/4W	
R436	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R437	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R438	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R439	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R440	1-216-027-00	METAL GLAZE	120	5%	1/10W	
R444	1-214-702-00	METAL	75	1%	1/4W	
R445	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R446	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R447	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R448	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R449	1-216-027-00	METAL GLAZE	120	5%	1/10W	
R450	1-214-702-00	METAL	75	1%	1/4W	
R451	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R452	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R453	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R454	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R455	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R456	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R457	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R458	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R459	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R460	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R461	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R462	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R463	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R464	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R465	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R466	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R467	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R471	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R472	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R473	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R474	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R475	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R476	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R478	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R479	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R480	1-247-711-11	CARBON	680	5%	1/4W	
R481	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R482	1-249-455-11	CARBON	4.7	5%	1/4W	
R483	1-249-389-11	CARBON	4.7	5%	1/4W	F
R484	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R485	1-247-688-11	CARBON	10	5%	1/4W	F
R486	1-249-468-11	CARBON	82K	5%	1/4W	
R487	1-249-468-11	CARBON	82K	5%	1/4W	
		<VARIABLE RESISTOR>				
RV401	1-230-481-11	RES, VAR, CARBON 20K				
		<SWITCH>				
S401	1-570-145-11	SWITCH, SLIDE				
S402	1-570-145-11	SWITCH, SLIDE				

****

*1-644-019-11 CB BOARD
****

REF.NO.	PART NO.	DESCRIPTION				REMARK
	1-526-958-11	SOCKET, CRT				
		<CAPACITOR>				
C701	1-162-114-00	CERAMIC	0.0047MF	10%	2KV	
C702	1-161-830-00	CERAMIC	0.0047MF	99%	500V	
C703	1-124-798-11	ELECT	1MF	20%	160V	
C704	1-102-123-00	CERAMIC	0.0033MF	10%	50V	
		<CONNECTOR>				
CN701	*1-564-509-11	PLUG, CONNECTOR 6P				
CN702	*1-508-784-00	PIN, CONNECTOR (5MM PITCH) 1P				
CN703	*1-564-508-11	PLUG, CONNECTOR 5P				
		<DIODE>				
D701	8-719-300-33	DIODE RU-3AM				
		<COIL>				
L701	1-410-668-11	INDUCTOR	27UH			
		<RESISTOR>				
R701	1-202-822-00	SOLID	2.2K	20%	1/2W	
R702	1-202-822-00	SOLID	2.2K	20%	1/2W	
R703	1-202-822-00	SOLID	2.2K	20%	1/2W	
R704	1-202-835-00	SOLID	39K	20%	1/2W	
R705	1-202-838-00	SOLID	100K	20%	1/2W	
R706	1-202-731-00	SOLID	10M	20%	1/2W	
R707	1-202-842-11	SOLID	220K	20%	1/2W	

****

*A-1341-562-A D BOARD, COMPLETE
****

*3-738-015-01 COVER, (DIA. 6) CARBON VR
4-382-854-01 SCREW (M3X8), P, SW (+)

REF.NO.	PART NO.	DESCRIPTION				REMARK
		<CAPACITOR>				
C501	1-124-477-11	ELECT	47MF	20%	16V	
C502	1-124-907-11	ELECT	10MF	20%	50V	
C503	1-126-103-11	ELECT	470MF	20%	16V	
C504	1-124-902-00	ELECT	0.47MF	20%	50V	
C505	1-106-381-12	MYLAR	0.039MF	10%	100V	
C506	1-124-903-11	ELECT	1MF	20%	50V	
C507	1-106-367-00	MYLAR	0.01MF	10%	100V	
C508	1-124-903-11	ELECT	1MF	20%	50V	
C509	1-136-173-00	FILM	0.47MF	5%	50V	
C510	1-136-161-00	FILM	0.047MF	5%	50V	
C511	1-124-903-11	ELECT	1MF	20%	50V	
C512	1-106-375-12	MYLAR	0.022MF	10%	100V	
C513	1-106-375-12	MYLAR	0.022MF	10%	100V	
C514	1-106-371-00	MYLAR	0.015MF	10%	100V	
C515	1-124-925-11	ELECT	2.2MF	20%	50V	
C516	1-124-925-11	ELECT	2.2MF	20%	50V	
C517	1-130-480-00	FILM	0.0056MF	5%	50V	
C518	1-163-245-11	CERAMIC CHIP	56PF	5%	50V	
C519	1-124-927-11	ELECT	4.7MF	20%	50V	
C520	1-163-129-00	CERAMIC CHIP	330PF	5%	50V	
C521	1-124-907-11	ELECT	10MF	20%	50V	
C523	1-106-363-00	MYLAR	0.0068MF	10%	100V	

REF.NO.	PART NO.	DESCRIPTION			REMARK
C524	1-102-116-00	CERAMIC	680PF	10%	50V
C525	1-102-820-00	CERAMIC	330PF	5%	50V
C526	1-102-973-00	CERAMIC	100PF	5%	50V
C527	1-124-514-11	ELECT	100MF	20%	50V
C528	1-102-125-00	CERAMIC	0.0047MF	10%	50V
C529	1-124-513-11	ELECT	47MF	20%	50V
C530	1-163-097-00	CERAMIC CHIP	15PF	5%	50V
C531	1-131-370-00	TANTALUM	6.8MF	10%	16V
C532	1-124-557-11	ELECT	1000MF	20%	25V
C533	1-124-927-11	ELECT	4.7MF	20%	50V
C534	1-124-768-11	ELECT	4.7MF	20%	50V
C535	1-136-161-00	FILM	0.047MF	5%	50V
C536	1-124-927-11	ELECT	4.7MF	20%	50V
C537	1-124-510-11	ELECT	220MF	20%	35V
C538	1-124-910-11	ELECT	47MF	20%	50V
C539	1-136-828-11	FILM	1.8MF	5%	200V
C540	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C541	1-163-035-00	CERAMIC CHIP	0.047MF		50V
C542	1-126-103-11	ELECT	470MF	20%	16V
C545	1-126-101-11	ELECT	100MF	20%	16V
C546	1-124-907-11	ELECT	10MF	20%	50V
C547	1-124-907-11	ELECT	10MF	20%	50V
C548	1-124-907-11	ELECT	10MF	20%	50V
C549	1-124-907-11	ELECT	10MF	20%	50V
C550	1-124-907-11	ELECT	10MF	20%	50V
C551	1-124-927-11	ELECT	4.7MF	20%	50V
C552	1-101-004-00	CERAMIC	0.01MF		50V
C553	1-126-103-11	ELECT	470MF	20%	16V
C563	1-106-383-00	MYLAR	0.047MF	10%	100V
C564	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C567	1-123-875-11	ELECT	10MF	20%	50V
C568	1-130-736-11	FILM	0.01MF	5%	50V
C569	1-130-471-00	FILM	0.001MF	5%	50V
C570	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C571	1-124-913-11	ELECT	470MF	20%	50V
C572	1-101-004-00	CERAMIC	0.01MF		50V
C574	1-106-351-00	MYLAR	0.0022MF	10%	100V
C575	1-106-351-00	MYLAR	0.0022MF	10%	100V
C831	1-123-875-11	ELECT	10MF	20%	50V
C832	1-123-875-11	ELECT	10MF	20%	50V
C833	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C834	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C835	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C836	1-123-875-11	ELECT	10MF	20%	50V
C837	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C838	1-136-163-00	FILM	0.068MF	5%	50V
C839	1-102-122-00	CERAMIC	0.0027MF	10%	50V
C840	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C841	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C843	1-124-052-51	ELECT	0.47MF	20%	50V
C844	1-124-902-00	ELECT	0.47MF	20%	50V
C845	1-124-126-00	ELECT	47MF	20%	10V
C846	1-124-907-11	ELECT	10MF	20%	50V
C847	1-126-233-11	ELECT	22MF	20%	50V
C848	1-131-351-00	TANTALUM	4.7MF	10%	35V
C849	1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C1601	1-124-907-11	ELECT	10MF	20%	50V
C1602	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C1603	1-104-348-91	ELECT	15MF		50V
C1604	1-128-500-51	ELECT	1000MF	20%	50V
C1605	1-124-922-11	ELECT	1000MF	20%	50V
C1606	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C1607	1-124-907-11	ELECT	10MF	20%	50V
C1608	1-126-233-11	ELECT	22MF	20%	50V
C1609	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C1610	1-126-163-11	ELECT	4.7MF	20%	50V
C1611	1-124-482-11	ELECT	33MF	20%	35V
C1612	1-136-257-00	FILM	0.0039MF	5%	50V
C1613	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C1614	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C1615	1-124-042-51	ELECT	0.47MF	20%	50V
C1620	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C1621	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C1641	1-163-035-00	CERAMIC CHIP	0.047MF		50V
		<CONNECTOR>			
CN501	*1-564-506-11	PLUG, CONNECTOR 3P			
CN502	1-506-477-11	PIN, CONNECTOR 12P			
CN504	*1-564-507-11	PLUG, CONNECTOR 4P			
CN505	*1-564-509-11	PLUG, CONNECTOR 6P			
CN507	*1-564-507-11	PLUG, CONNECTOR 4P			
CN508	*1-564-104-00	PIN, CONNECTOR (B3P-VH) 3P			
CN509	*1-564-506-11	PLUG, CONNECTOR 3P			
		<DIODE>			
D501	8-719-404-46	DIODE MA110			
D502	8-719-404-46	DIODE MA110			
D503	8-719-404-46	DIODE MA110			
D504	8-719-404-46	DIODE MA110			
D505	8-719-404-46	DIODE MA110			
D506	8-719-911-55	DIODE D05G			
D507	8-719-404-46	DIODE MA110			
D508	8-719-404-46	DIODE MA110			
D509	8-719-404-46	DIODE MA110			
D510	8-719-404-46	DIODE MA110			
D511	8-719-404-46	DIODE MA110			
D512	8-719-404-46	DIODE MA110			
D514	8-719-404-46	DIODE MA110			
D579	8-719-800-81	DIODE 1SS226			
D831	8-719-404-46	DIODE MA110			
D832	8-719-404-46	DIODE MA110			
D833	8-719-404-46	DIODE MA110			
D834	8-719-404-46	DIODE MA110			
D835	8-719-109-89	DIODE RD5.6ESB2			
D836	8-719-977-69	DIODE DTZ24B			
D837	8-719-404-46	DIODE MA110			
D838	8-719-404-46	DIODE MA110			
D1601	8-719-105-XX	DIODE RD6.2M-B1			
D1602	8-719-404-46	DIODE MA110			
D1603	8-719-977-61	DIODE DTZ20B			
D1604	8-719-404-46	DIODE MA110			
D1605	8-719-404-46	DIODE MA110			
D1606	8-719-981-00	DIODE ERC81-004			
D1607	8-719-981-00	DIODE ERC81-004			
D1608	8-719-977-02	DIODE DTZ5.6A			
D1609	8-719-977-49	DIODE DTZ15B			
D1610	8-719-404-46	DIODE MA110			
D1611	8-729-101-31	TRANSISTOR N13T1			
D1612	8-719-404-46	DIODE MA110			
D1613	8-719-404-46	DIODE MA110			
D1614	8-719-404-46	DIODE MA110			
D1615	8-719-404-46	DIODE MA110			
D1616	8-719-404-46	DIODE MA110			
D1617	8-719-977-49	DIODE DTZ15B			
D1618	8-719-977-49	DIODE DTZ15B			
D1625	8-719-404-46	DIODE MA110			

D

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF.NO.	PART NO.	DESCRIPTION	REMARK
D1626	8-719-404-46	DIODE MA110	
D1627	8-719-404-46	DIODE MA110	
D1628	8-719-404-46	DIODE MA110	
D1635	8-719-404-46	DIODE MA110	
D1699	8-719-404-46	DIODE MA110	
		<FUSE>	
F1601	1-532-777-21	FUSE, MICRO (SECONDARY) (1.25A/125V)	
F1602	1-533-189-11	HOLDER, FUSE	
		<IC>	
IC501	8-759-909-70	IC CX23025	
IC502	8-759-100-60	IC UPC1377C	
IC503	8-759-801-98	IC LA7830	
IC504	8-759-929-62	IC LM7812CT	
IC505	8-759-009-51	IC MC14538BF	
IC831	8-759-509-29	IC XRU40118F	
IC832	8-759-509-37	IC XRU40708F	
IC833	8-759-009-51	IC MC14538BF	
IC1601	8-759-509-91	IC XRA10393F	
		<COIL>	
L501	1-410-093-11	INDUCTOR 33MMH	
L502	1-410-665-31	INDUCTOR 15UH	
L503	1-424-625-11	COIL, CHOKE (PMC) 381.4UH	
L506	1-412-530-31	INDUCTOR 27UH	
L1601	1-459-155-00	COIL (WITH CORE) 45UH	
L1602	1-424-626-12	COIL, CHOKE 390UH	
L1603	1-410-397-21	FERRITE BEAD INDUCTOR	
		<TRANSISTOR>	
Q501	8-729-901-01	TRANSISTOR DTC144EK	
Q502	8-729-901-01	TRANSISTOR DTC144EK	
Q503	8-729-901-06	TRANSISTOR DTA144EK	
Q504	8-729-901-01	TRANSISTOR DTC144EK	
Q505	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q506	8-729-901-01	TRANSISTOR DTC144EK	
Q507	8-729-901-01	TRANSISTOR DTC144EK	
Q508	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q509	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q510	8-729-901-06	TRANSISTOR DTA144EK	
Q511	8-729-901-01	TRANSISTOR DTC144EK	
Q512	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q513	8-729-216-22	TRANSISTOR 2SA1162-G	
Q514	8-729-216-22	TRANSISTOR 2SA1162-G	
Q515	8-729-313-42	TRANSISTOR 2SD1134-C	
Q516	8-729-901-01	TRANSISTOR DTC144EK	
Q517	8-729-901-01	TRANSISTOR DTC144EK	
Q518	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q519	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q525	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q532	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q533	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q833	8-729-216-22	TRANSISTOR 2SA1162-G	
Q834	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q835	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q836	8-729-309-08	TRANSISTOR 2SC1890A-E	
Q1601	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1602	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1603	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1604	8-729-216-22	TRANSISTOR 2SA1162-G	

REF.NO.	PART NO.	DESCRIPTION	REMARK
Q1605	8-729-119-80	TRANSISTOR 2SC2688-LK	
Q1606	8-729-133-42	TRANSISTOR 2SC2334-L	
Q1607	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1608	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1609	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1610	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1611	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1612	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1613	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1614	8-729-920-74	TRANSISTOR 2SC2412K-QR	
Q1615	8-729-216-22	TRANSISTOR 2SA1162-G	
Q1616	8-729-216-22	TRANSISTOR 2SA1162-G	
Q1617	8-729-216-22	TRANSISTOR 2SA1162-G	
Q1618	8-729-216-22	TRANSISTOR 2SA1162-G	
		<RESISTOR>	
JB510	1-216-295-00	METAL GLAZE 0 5% 1/10W	
R501	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R502	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R503	1-249-437-11	CARBON 47K 5% 1/4W	F
R504	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R505	1-249-393-11	CARBON 10 5% 1/4W	F
R506	1-216-071-00	METAL GLAZE 8.2K 5% 1/10W	
R507	1-216-059-00	METAL GLAZE 2.7K 5% 1/10W	
R508	1-216-085-00	METAL GLAZE 33K 5% 1/10W	
R509	1-216-687-11	METAL CHIP 33K 0.50% 1/10W	
R510	1-216-683-11	METAL CHIP 22K 0.50% 1/10W	
R511	1-216-675-11	METAL CHIP 10K 0.50% 1/10W	
R512	1-218-761-11	METAL CHIP 240K 0.50% 1/10W	
R513	1-216-065-00	METAL GLAZE 4.7K 5% 1/10W	
R514	1-218-754-11	METAL CHIP 120K 0.50% 1/10W	
R515	1-216-081-00	METAL GLAZE 22K 5% 1/10W	
R516	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R517	1-218-768-11	METAL CHIP 470K 0.50% 1/10W	
R518	1-249-422-11	CARBON 2.7K 5% 1/4W	F
R519	1-216-085-00	METAL GLAZE 33K 5% 1/10W	
R520	1-216-677-11	METAL CHIP 12K 0.50% 1/10W	
R521	1-216-067-00	METAL GLAZE 5.6K 5% 1/10W	
R522	1-216-107-00	METAL GLAZE 270K 5% 1/10W	
R523	1-216-081-00	METAL GLAZE 22K 5% 1/10W	
R524	1-216-049-00	METAL GLAZE 1K 5% 1/10W	
R525	1-216-434-11	METAL OXIDE 1.8K 5% 1W	F
R526	1-216-079-00	METAL GLAZE 18K 5% 1/10W	
R527	1-249-437-11	CARBON 47K 5% 1/4W	F
R528	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R529	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R530	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R531	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R532	1-216-097-00	METAL GLAZE 100K 5% 1/10W	
R533	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R534	1-216-097-00	METAL GLAZE 100K 5% 1/10W	
R535	1-216-053-00	METAL GLAZE 1.5K 5% 1/10W	
R536	1-212-881-11	FUSIBLE 100 5% 1/4W	F
R537	1-215-867-00	METAL OXIDE 470 5% 1W	F
R538	1-216-095-00	METAL GLAZE 82K 5% 1/10W	
R539	1-216-095-00	METAL GLAZE 82K 5% 1/10W	
R540	1-216-101-00	METAL GLAZE 150K 5% 1/10W	
R541	1-216-063-00	METAL GLAZE 3.9K 5% 1/10W	
R542	1-216-075-00	METAL GLAZE 12K 5% 1/10W	
R543	1-216-065-00	METAL GLAZE 4.7K 5% 1/10W	
R544	1-216-101-00	METAL GLAZE 150K 5% 1/10W	
R545	1-216-041-00	METAL GLAZE 470 5% 1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R546	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R547	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R548	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R549	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R550	1-216-354-11	METAL OXIDE	2.7	5%	1W	F
R552	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R553	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R554	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R555	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R557	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R558	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R559	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R560	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R561	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R562	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R563	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R564	1-249-410-11	CARBON	270	5%	1/4W	F
R565	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R566	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R567	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R568	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R569	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R570	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R571	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R572	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R573	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R574	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R575	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R576	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R577	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R578	1-249-457-11	CARBON	6.8	5%	1/4W	F
R579	1-249-457-11	CARBON	6.8	5%	1/4W	F
R580	1-216-001-00	METAL GLAZE	10	5%	1/10W	
R591	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R592	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R831	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R832	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R833	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R834	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R835	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R836	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R837	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R838	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R839	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R840	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R841	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R842	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R843	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R844	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R847	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R850	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R851	1-216-669-11	METAL CHIP	5.6K	0.50%	1/10W	
R852	1-216-675-11	METAL CHIP	10K	0.50%	1/10W	
R853	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R854	2-218-754-11	METAL CHIP	120K	0.50%	1/10W	
R855	1-216-697-11	METAL CHIP	82K	0.50%	1/10W	
R856	1-216-100-00	METAL GLAZE	130K	5%	1/10W	
R857	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R858	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R859	1-216-436-00	METAL OXIDE	3.9K	5%	1W	F
R860	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R861	1-216-672-11	METAL CHIP	7.5K	0.50%	1/10W	
R862	1-216-675-11	METAL CHIP	10K	0.50%	1/10W	
R863	1-249-435-11	CARBON	33K	5%	1/4W	F

REF.NO.	PART NO.	DESCRIPTION				REMARK
R1503	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1504	1-216-689-11	METAL CHIP	39K	0.50%	1/10W	
R1505	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1506	1-216-667-11	METAL CHIP	4.7K	0.50%	1/10W	
R1507	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1508	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1509	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1510	1-249-425-11	CARBON	4.7K	5%	1/4W	F
R1511	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1512	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1513	1-216-017-00	METAL GLAZE	47	5%	1/10W	
R1519	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1520	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1601	1-216-685-11	METAL CHIP	27K	0.50%	1/10W	
R1602	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R1603	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R1604	1-249-433-11	CARBON	22K	5%	1/4W	F
R1605	1-216-070-00	METAL GLAZE	7.5K	5%	1/10W	
R1606	1-216-070-00	METAL GLAZE	7.5K	5%	1/10W	
R1607	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W	
R1608	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1609	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1610	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1611	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1612	1-215-913-11	METAL OXIDE	220	5%	3W	F
R1613	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1614	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R1615	1-216-657-11	METAL CHIP	1.8K	0.50%	1/10W	
R1616	1-216-629-11	METAL CHIP	120	0.50%	1/10W	
R1617	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W	
R1618	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1620	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1621	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1622	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1623	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1624	1-216-246-00	METAL GLAZE	100K	5%	1/8W	
R1625	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1626	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1627	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1628	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1629	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R1630	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R1631	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1632	1-216-042-00	METAL GLAZE	510	5%	1/10W	
R1633	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1634	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1635	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1636	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1640	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1641	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1642	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1643	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1644	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1645	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1646	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1647	1-216-685-11	METAL CHIP	27K	0.50%	1/10W	
R1648	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1649	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1650	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1651	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1652	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1653	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1654	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	

D HB S

• The components identified by ⚠ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF.NO.	PART NO.	DESCRIPTION				REMARK
R1655	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1656	1-216-643-11	METAL CHIP	470	0.50%	1/10W	
R1657	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1658	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1659	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1660	1-216-649-11	METAL CHIP	820	0.50%	1/10W	
R1661	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
		<VARIABLE RESISTOR>				
RV501	1-238-019-11	RES, ADJ, CARBON 47K				
RV502	1-238-017-11	RES, ADJ, CARBON 22K				
RV503	1-241-763-11	RES, ADJ, CERMET 4.7K				
RV504	1-224-250-XX	RES, ADJ, METAL GLAZE 2.2K				
RV505	1-238-009-11	RES, ADJ, CARBON 220				
RV506	1-238-012-11	RES, ADJ, CARBON 1K				
RV507	1-238-013-11	RES, ADJ, CARBON 2.2K				
RV508	1-238-012-11	RES, ADJ, CARBON 1K				
RV509	1-238-020-11	RES, ADJ, CARBON 100K				
RV511	1-238-015-11	RES, ADJ, CARBON 4.7K				
RV512	1-238-015-11	RES, ADJ, CARBON 4.7K				
RV514	1-238-019-11	RES, ADJ, CARBON 47K				
RV515	1-238-021-11	RES, ADJ, CARBON 220K				
RV516	1-241-763-11	RES, ADJ, CERMET 4.7K				
RV831	1-228-997-00	RES, ADJ, METAL GLAZE 100K				
RV832	1-241-764-11	RES, ADJ, CERMET 10K				
⚠RV833A1	1-228-997-11	RES, ADJ, METAL GLAZE				
RV1601	1-241-762-11	RES, ADJ, CERMET 2.2K				
RV1602	1-238-012-11	RES, ADJ, CARBON 1K				
⚠RV1603A1	1-241-704-11	RES, ADJ, CERMET				
		<RELAY>				
RY1601	1-515-481-21	RELAY (G2R-212P-V)				
		<TRANSFORMER>				
T1601	1-437-216-11	TRANSFORMER, DRIVE				
		<THERMISTOR>				
TH501	1-807-971-11	THERMISTOR				
		**********				
	*1-644-020-11	HB BOARD ********				
	*4-341-751-01	EYELET EY7				
	*4-348-208-00	HOLDER, LED				
		<CONNECTOR>				
CN001	1-506-478-11	PIN, CONNECTOR 13P				
		<DIODE>				
D001	8-719-020-05	DIODE SLP281C-50				
D002	8-719-109-68	DIODE RD3.6ESB1				
		<RESISTOR>				
R001	1-247-713-11	CARBON	1K	5%	1/4W	
R002	1-216-295-00	METAL GLAZE	0	5%	1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
		<VARIABLE RESISTOR>				
RV001	1-241-846-11	RES, VAR, CARBON 20K				
RV002	1-241-846-11	RES, VAR, CARBON 20K				
RV003	1-241-845-11	RES, VAR, CARBON 20K				
RV004	1-241-845-11	RES, VAR, CARBON 20K				
RV005	1-241-845-11	RES, VAR, CARBON 20K				
		<SWITCH>				
S001	1-554-419-00	SWITCH, PUSH (1 KEY)				
S003	1-554-419-00	SWITCH, PUSH (1 KEY)				
S004	1-554-419-00	SWITCH, PUSH (1 KEY)				
S005	1-554-419-00	SWITCH, PUSH (1 KEY)				
		**********				
	*A-1390-277-C	S BOARD, COMPLETE **********				
	*3-738-015-01	COVER, (DIA. 6) CARBON VR				
		<CAPACITOR>				
C1101	1-163-119-00	CERAMIC CHIP 120PF		5%	50V	
C1102	1-164-004-11	CERAMIC CHIP 0.1MF		10%	25V	
C1103	1-124-589-11	ELECT	47MF	20%	16V	
C1104	1-163-031-11	CERAMIC CHIP 0.01MF			50V	
C1105	1-163-114-00	CERAMIC CHIP 75PF		5%	50V	
C1106	1-163-101-00	CERAMIC CHIP 22PF		5%	50V	
C1107	1-164-004-11	CERAMIC CHIP 0.1MF		10%	25V	
C1108	1-163-119-00	CERAMIC CHIP 120PF		5%	50V	
C1109	1-163-031-11	CERAMIC CHIP 0.01MF			50V	
C1110	1-163-117-00	CERAMIC CHIP 100PF		5%	50V	
C1111	1-163-018-00	CERAMIC CHIP 0.0056MF		10%	50V	
C1112	1-126-160-11	ELECT	1MF	20%	50V	
C1113	1-163-119-00	CERAMIC CHIP 120PF		5%	50V	
C1114	1-163-103-00	CERAMIC CHIP 27PF		5%	50V	
C1115	1-164-004-11	CERAMIC CHIP 0.1MF		10%	25V	
C1116	1-163-114-00	CERAMIC CHIP 75PF		5%	50V	
C1117	1-124-589-11	ELECT	47MF	20%	16V	
C1118	1-164-004-11	CERAMIC CHIP 0.1MF		10%	25V	
C1119	1-163-020-00	CERAMIC CHIP 0.0082MF		10%	50V	
C1120	1-163-097-00	CERAMIC CHIP 15PF		5%	50V	
C1121	1-163-097-00	CERAMIC CHIP 15PF		5%	50V	
C1122	1-163-222-11	CERAMIC CHIP 5PF		0.25PF	50V	
C1123	1-163-097-00	CERAMIC CHIP 15PF		5%	50V	
C1130	1-163-097-00	CERAMIC CHIP 15PF		5%	50V	
C1131	1-163-097-00	CERAMIC CHIP 15PF		5%	50V	
		<CONNECTOR>				
CN1101	*1-565-488-11	CONNECTOR, BOARD TO BOARD 12P				
		<DIODE>				
D1101	8-719-404-46	DIODE MA110				
D1102	8-719-404-46	DIODE MA110				
		<IC>				
IC1101	8-752-056-67	IC CXA1214P				
		<COIL>				

onents identified by
nd mark ⚠ are criti-
fety.
nly with part number

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

RT NO.	DESCRIPTION		REMARK
408-411-00	INDUCTOR	15UH	
404-496-00	COIL		
404-496-00	COIL		
408-411-00	INDUCTOR	15UH	
412-008-31	INDUCTOR CHIP	15UH	
412-008-31	INDUCTOR CHIP	15UH	

<TRANSISTOR>

729-216-22	TRANSISTOR 2SA1162-G	
729-920-74	TRANSISTOR 2SC2412K-QR	
729-216-22	TRANSISTOR 2SA1162-G	
729-216-22	TRANSISTOR 2SA1162-G	
729-901-01	TRANSISTOR DTC144EK	
729-901-01	TRANSISTOR DTC144EK	
729-109-44	TRANSISTOR 2SK94-X4	
729-920-74	TRANSISTOR 2SC2412K-QR	

<RESISTOR>

216-053-00	METAL GLAZE	1.5K	5%	1/10W
216-067-00	METAL GLAZE	5.6K	5%	1/10W
216-059-00	METAL GLAZE	2.7K	5%	1/10W
216-073-00	METAL GLAZE	10K	5%	1/10W
216-031-00	METAL GLAZE	180	5%	1/10W
216-059-00	METAL GLAZE	2.7K	5%	1/10W
216-071-00	METAL GLAZE	8.2K	5%	1/10W
216-039-00	METAL GLAZE	390	5%	1/10W
216-063-00	METAL GLAZE	3.9K	5%	1/10W
216-069-00	METAL GLAZE	6.8K	5%	1/10W
216-065-00	METAL GLAZE	4.7K	5%	1/10W
216-059-00	METAL GLAZE	2.7K	5%	1/10W
216-069-00	METAL GLAZE	6.8K	5%	1/10W
216-055-00	METAL GLAZE	1.8K	5%	1/10W
216-061-00	METAL GLAZE	3.3K	5%	1/10W
216-069-00	METAL GLAZE	6.8K	5%	1/10W
216-061-00	METAL GLAZE	3.3K	5%	1/10W
216-073-00	METAL GLAZE	10K	5%	1/10W
216-049-00	METAL GLAZE	1K	5%	1/10W
216-097-00	METAL GLAZE	100K	5%	1/10W
216-121-00	METAL GLAZE	1M	5%	1/10W
216-039-00	METAL GLAZE	390	5%	1/10W
216-065-00	METAL GLAZE	4.7K	5%	1/10W
216-029-00	METAL GLAZE	150	5%	1/10W
216-029-00	METAL GLAZE	150	5%	1/10W
216-053-00	METAL GLAZE	1.5K	5%	1/10W
216-043-00	METAL GLAZE	560	5%	1/10W
216-049-00	METAL GLAZE	1K	5%	1/10W
216-091-00	METAL GLAZE	56K	5%	1/10W
216-295-00	METAL GLAZE	0	5%	1/10W
216-073-00	METAL GLAZE	10K	5%	1/10W
216-073-00	METAL GLAZE	10K	5%	1/10W
216-073-00	METAL GLAZE	10K	5%	1/10W
216-091-00	METAL GLAZE	56K	5%	1/10W

<VARIABLE RESISTOR>

1-238-015-11	RES, ADJ,
1-238-013-11	RES,

REF.NO.	PART NO.	DESCRIPTION	REMARK

****

G BOARD (SOPS-1021)
****

⚠	4-812-134-11	RIVET NYLON 5.5W	

<CAPACITOR>

C601	⚠ 1-136-889-11	METALIZED FILM 0.22MF	20%	250V	
C602	⚠ 1-136-889-11	METALIZED FILM 0.22MF	20%	250V	
C603	⚠ 1-161-973-51	CERAMIC 220PF	10%	400V	
C604	⚠ 1-161-973-51	CERAMIC 220PF	10%	400V	
C605	⚠ 1-161-973-51	CERAMIC 220PF	10%	400V	
C608	⚠ 1-161-742-51	CERAMIC 0.0022MF	20%	400V	
C609	⚠ 1-161-742-51	CERAMIC 0.0022MF	20%	400V	
C610	⚠ 1-125-724-11	ELECT 180MF	20%	400V	
C611	⚠ 1-136-206-21	METALIZED FILM 0.033MF	10%	630V	
C612	⚠ 1-124-910-51	ELECT 47MF	20%	50V	
C613	⚠ 1-132-190-91	METALIZED FILM 0.22MF	5%	50V	
C614	⚠ 1-137-190-91	METALIZED FILM 0.22MF	5%	50V	
C615	⚠ 1-130-471-91	PE TEREPHTHALATE 0.001MF	5%	50V	
C651	⚠ 1-161-925-11	CERAMIC 100PF B	10%	500V	
C652	⚠ 1-128-486-51	ELECT 680MF	20%	50V	
C653	⚠ 1-128-485-51	ELECT 220MF	20%	50V	
C654	⚠ 1-130-483-91	PE TEREPHTHALATE 0.01MF	5%	50V	

<CONNECTOR>

CN610A	⚠ 1-560-436-11	HORIZONTAL PIN ASST 3P
CN651A	⚠ 1-564-518-11	PLUG, CONNECTOR 3P

<DIODE>

D201	⚠ 8-719-971-08	DIODE ESAC39M-06G
D601	⚠ 8-719-510-27	DIODE D35B60
D602	⚠ 8-719-921-20	DIODE 1SS119TD
D603	⚠ 8-719-081-47	DIODE RBA38-06TP1
D604	⚠ 8-719-081-47	DIODE RBA38-06TP1
D605	⚠ 8-719-113-44	DIODE RD20ES-11B3
D651	⚠ 8-719-971-08	DIODE ESAC39M-06G

<IC>

IC601	⚠ 1-809-086-12	IC CN-1018
IC651	⚠ 8-759-908-15	IC TL431CLP
PRG601	⚠ 8-759-045-81	IC ELF73G08-LFZ

<COIL>

L601	⚠ 1-424-616-11	TRANSFORMER, LINE FILTER
L602	⚠ 1-424-574-11	L.F.T
L651	⚠ 1-424-259-41	COIL, CHOKE (MOLDE) 100UH
L652	⚠ 1-424-615-11	COIL, CHOKE

<TRANSISTOR>

Q601	⚠ 8-729-322-18	TRANSISTOR 2SK1402A

<RESISTOR>

[illegible]	1.5	5%	5W	
[illegible]	1.5	5%	5W	
[illegible]	100K	5%	2W	
[illegible]	100K	5%	2W	

QM

- The components identified by ⚠ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

RT NO.	DESCRIPTION				REMARK
212-865-61	FUSIBLE	22	5%	1/4W	F
247-805-91	CARBON	82	5%	1/4W	
260-128-91	CARBON	270K	5%	1/2W	
260-128-91	CARBON	270K	5%	1/2W	
215-904-51	METAL OXIDE	100K	5%	2W	F
207-455-11	WIRE	0.22	10%	1/2W	
247-789-91	CARBON	18	5%	1/4W	
247-795-91	CARBON	33	5%	1/4W	
215-904-51	METAL OXIDE	100K	5%	2W	F
247-815-91	CARBON	220	5%	1/4W	
215-886-51	METAL OXIDE	100	5%	2W	F
215-886-51	METAL OXIDE	100	5%	2W	F
260-107-91	CARBON	4.7K	5%	1/2W	
260-107-91	CARBON	4.7K	5%	1/2W	
247-867-91	CARBON	33K	5%	1/4W	
247-867-91	CARBON	33K	5%	1/4W	
247-837-91	CARBON	1.8K	5%	1/4W	

<VARIABLE RESISTOR>

237-443-11	RES, ADJ, CARBON 1K				

<TRANSFORMER>

150-760-12	TRANSFORMER, CONVERTER				

****

MISCELLANEOUS
****

413-720-21	SWITCHING REGULATOR TSOPS 1021
426-614-11	COIL, DEMAGNETIZATION
451-325-11	DEFLECTION YOKE (Y06JYA2)
452-126-11	MAGNET
543-925-11	CORE, FERRITE
544-252-11	SPEAKER
576-232-11	FUSE (T.B.C.) (5A/250V)
923-183-01	WIRE UL1007 AWG18 50MM BLK
733-921-05	CRT Y06JYA

****

ACCESSORIES & PACKING MATERIALS
****

RT NO.	DESCRIPTION	REMARK
590-010-11	CORD SET, POWER (T.B.C./250V)	
590-871-11	CABLE (MINI DIN) 8P	
990-241-02	HOLDER (A), PLUG	
170-078-01	HOLDER (B), PLUG	
755-607-11	MANUAL, INSTRUCTION	
336-595-01	INDIVIDUAL CARTON	
336-599-01	CUSHION (LOWER) (ASSY)	
336-600-01	CUSHION (UPPER) (ASSY)	

SP0186

-100-

PVM-6041QM

SONY
SERVICE MANUAL

AEP Model
Chassis No. SCC-F09D-A

CORRECTION-2

Correct the service manual as shown below.
File this collection with the service manual.

☛ : Corrected portion

SECTION 7 EXPLODED VIEWS

7-1. CHASSIS (See page 76)

Incorrect	Correct
■ : +P4×25 7-685-567-09	■ : +P4×25 7-682-567-09
—	PART. NO. / DESCRIPTION 1-941-906-07 / CONNECTOR ASSY, VH 3P (DC12V IN Jack)

SECTION 8 ELECTRICAL PARTS LIST (See page 88)

D BOARD

Incorrect		Correct	
PART. NO.	DESCRIPTION	PART. NO.	DESCRIPTION
* A-1341-562-A	D BOARD, COMPLETE	* A-1346-067-A	D BOARD, COMPLETE

MICROFILM
9-978-298-93

Sony Corporation
Display Products Group

English
93JL0510-1
Printed in Japan

SP0186

PVM-6041QM

SONY
SERVICE MANUAL

AEP Model

Chassis No. SCC-F09D-A

SUPPLEMENT-1

INTRODUCTION

- B board : The transistor is changed to the pair transistor (Q189).
  The diodes are changed to the three-terminal diodes (D185, D186, D187, D188, D191, D390 and D1382).
- D board : The transistors are changed to the pair transistors (Q569, Q576, Q579 and Q599).
  The diodes are changed to the three-terminal diodes (D520, D521, D589, D848, D1620, D1622 and D1623).
- S board : The pattern is modified.

Note)
Before using the circuit board, confirm that the parts number shown below and the parts number of the circuit board which is being used in your set are the same.

Board (Complete No.)	Board Part. No.
B (A-1135-726-A)	1-641-716-15
D (A-1346-067-A)	1-641-717-16
S (A-1394-392-A)	1-641-719-15

MICROFILM

TABLE OF CONTENTS

(CAUTION)

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.
THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

SECTION 1
DIAGRAMS

1-1. CIRCUITS BOARDS LOCATION



1-2. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50 WV or less are not indicated except for electrolytic.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

  Pitch: 5 mm
  Rating electrical power ¼ W

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- △ : internal component.
- : panel designation.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- The components identified by ⊞ in this basic schematic diagram have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.
- When replacing components identified by ◪ , make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by ⊞ and repeat the adjustment until the specified value is achieved. (Refer to RV651, RV1603 and RV633 adjust on page 18 and 19.)
- When replacing the part in below table be sure to perform the related adjustment.

Part replaced (◪)	Adjustment (⊞)
IC601, IC651, PH602, C655, R653, R655, R656, R657, RV651	RV651 (B+ MAX)
Q1601, Q1602, Q1603, D1601, D1603, D1622, C1601, C1602, R1601, R1602, R1603, R1604, R1605, R1606, R1607, R1608, R1628, R1629, R1630, RV1601, RV1603	RV1603 (B+ MAX IN DC POWER INPUT MODE)
IC502, Q833, Q834, Q835, Q836, D835, D836, C519, C843, C844, C845, C846, C847, C848, RV833, R525, R650, R651, R652, R653, R654, R655, R656, R657, R658, R659, R661, R662, R663, NL801	R833 (HOLD-DOWN)

- All voltages are in V.
- Voltage are dc with respect to groundunless otherwise noted.
- Readings are taken with a color-bar signal input.
- Readings are taken with a PAL color-bar signal input.
- ▭ : adjustment fir repair.
- Voltage variations may be noted due to normal production tolerance.
- ▬▬ : B + bus.
- ▬ ▬ : B − bus.
- ▒▒▒ : signal path.
- No mark: with PAL color-bar signal received or common voltage.
- ( ) : with SECAM color-bar signal received.
- < > : with NTSC 3.58 color-bar signal received.
- ⟨⟨ ⟩⟩ : with NTSC 4.43 color-bar signal received.
- [ ] : with S(Y/C) color-bar signal received.
- { } : with analog RGB color-bar signal received.
- ≪ ≫ : with component color-bar signal received.
- ※ : measurement impossibility

Reference information

RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RS	NONFLAMMABLE WIREWOUND
	: RB	NONFLAMMABLE CEMENT
COIL	: LF-8L	MICRO INDUCTOR
CAPACITOR	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE

S [SECAM DEMODULATION]

– S Board – – Component Side –



- ▒▒▒ : Pattern from the side which enables seeing.
- ▒▒▒ : Pattern of the rear side.

– S Board – – Conductor Side –



- ▒▒▒ : Pattern from the side which enables seeing.
- ▒▒▒ : Pattern of the rear side.

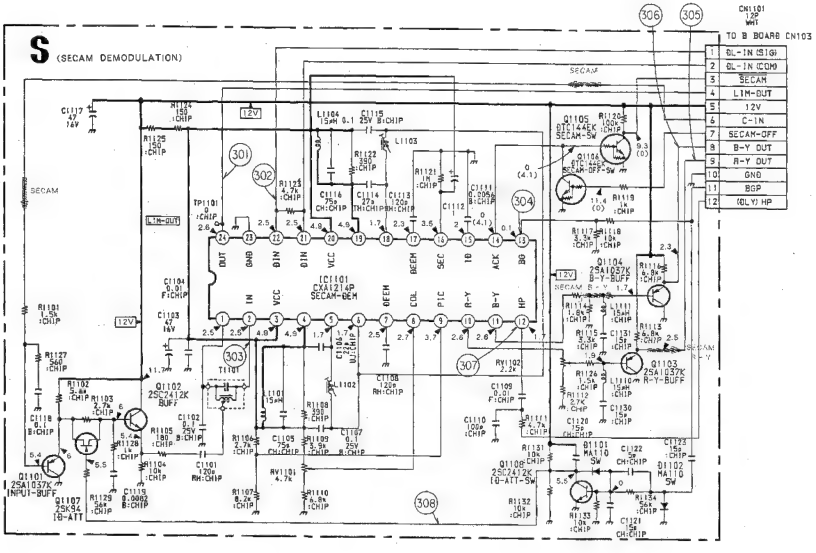

S Board IC1101 CXA1214P

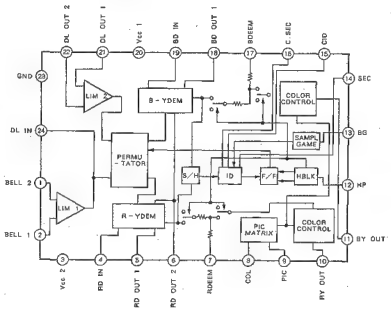

• S BOARD WAVEFORMS

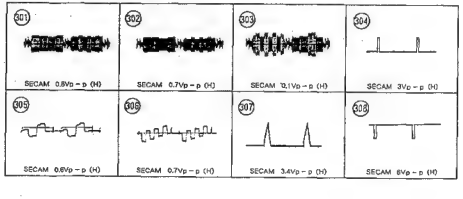

• D BOARD WAVEFORMS

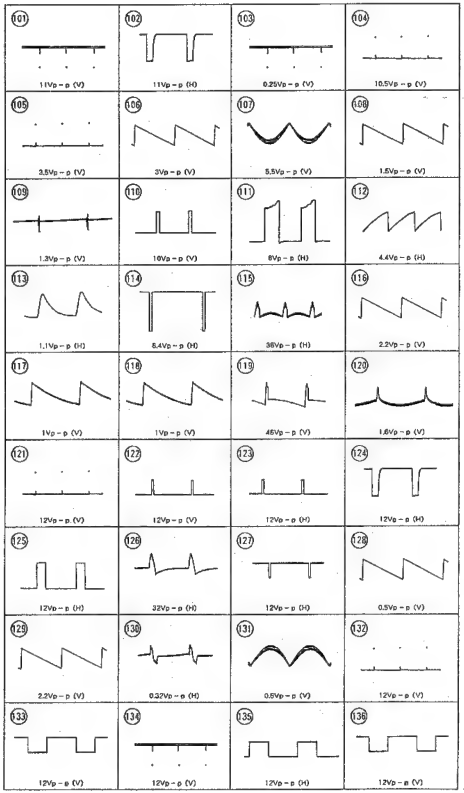

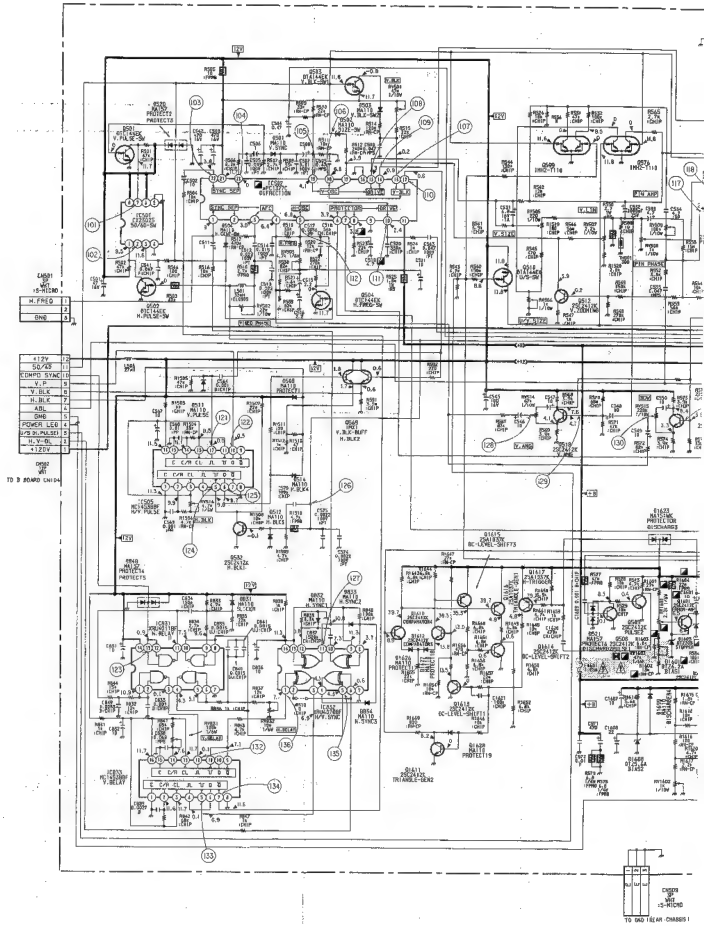

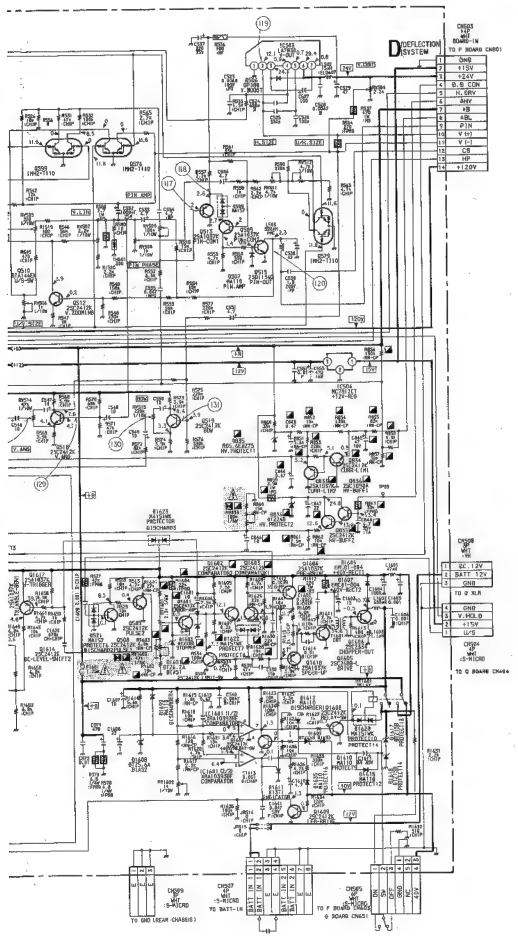

D BOARD IC501 CX23025

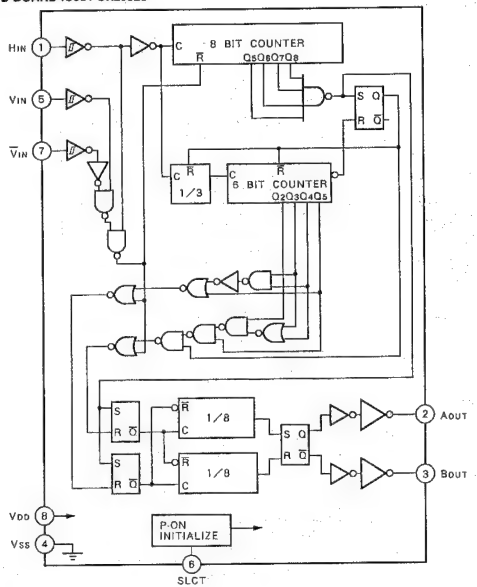

D BOARD IC503 LA7830



D [DEFLECTION SYSTEM]

– D Board – – Component Side –

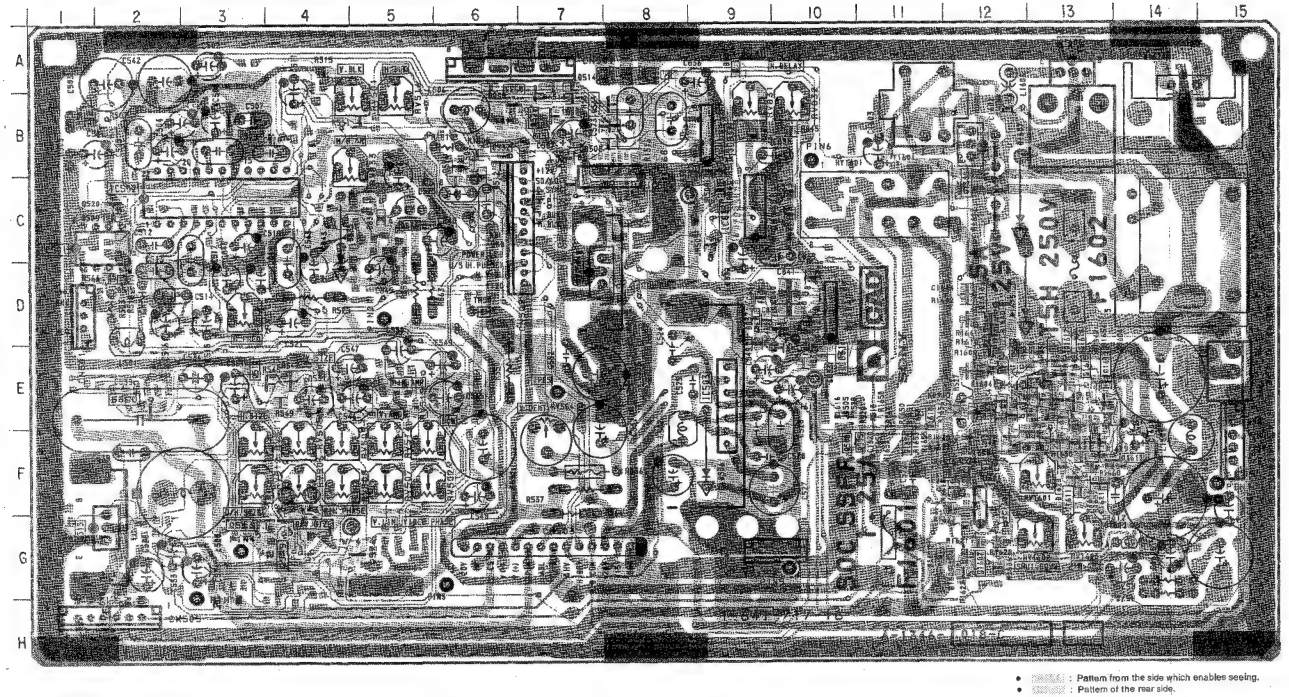

• : Pattern from the side which enables seeing.
• : Pattern of the rear side.

D Board (Component Side)

IC	
IC505	C – 8
IC831	D – 10
IC832	B – 9
IC833	C – 9
IC1601	F – 12

TRANSISTOR	
Q505	F – 12
Q508	F – 12
Q509	E – 12
Q512	E – 4
Q532	B – 6
Q576	G – 5
Q579	G – 4
Q599	E – 2
Q1607	G – 12
Q1610	E – 13
Q1611	F – 13
Q1612	E – 13
Q1613	F – 13
Q1614	F – 13
Q1615	E – 13
Q1616	E – 13
Q1617	E – 13
Q1618	D – 12

DIODE	
D508	A – 6
D512	C – 6
D514	A – 7
D520	C – 2
D521	F – 12
D833	A – 8
D834	A – 9
D838	C – 5
D846	D – 10
D1608	G – 12
D1610	G – 10
D1626	F – 13
D1627	F – 13
D1628	F – 13

– D Board – – Conductor Side –

D Board (Component Side)

IC	
IC505	C – 8
IC831	D – 10
IC832	B – 9
IC833	C – 9
IC1601	F – 12

TRANSISTOR	
Q505	F – 12
Q508	F – 12
Q509	E – 12
Q512	E – 4
Q532	B – 6
Q576	G – 5
Q579	G – 4
Q599	E – 2
Q1607	G – 12
Q1610	E – 13
Q1611	F – 13
Q1612	E – 13
Q1613	F – 13
Q1614	F – 13
Q1615	E – 13
Q1616	E – 13
Q1617	E – 13
Q1618	D – 12

DIODE	
D508	A – 8
D512	C – 8
D514	A – 7
D520	C – 2
D521	F – 12
D533	A – 8
D534	A – 9
D536	C – 5
D548	D – 10
D1608	G – 12
D1610	G – 10
D1626	F – 13
D1627	F – 13
D1628	F – 13

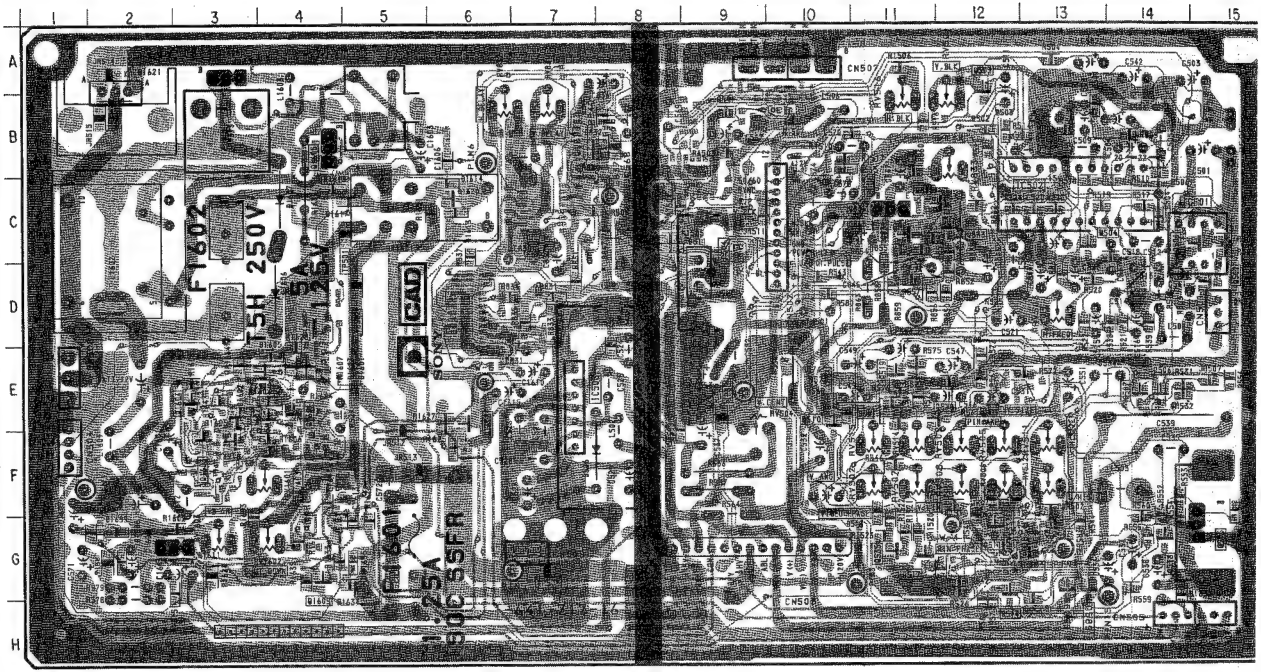

- : Pattern from the side which enables seeing.
- : Pattern of the rear side.

ictor Side –

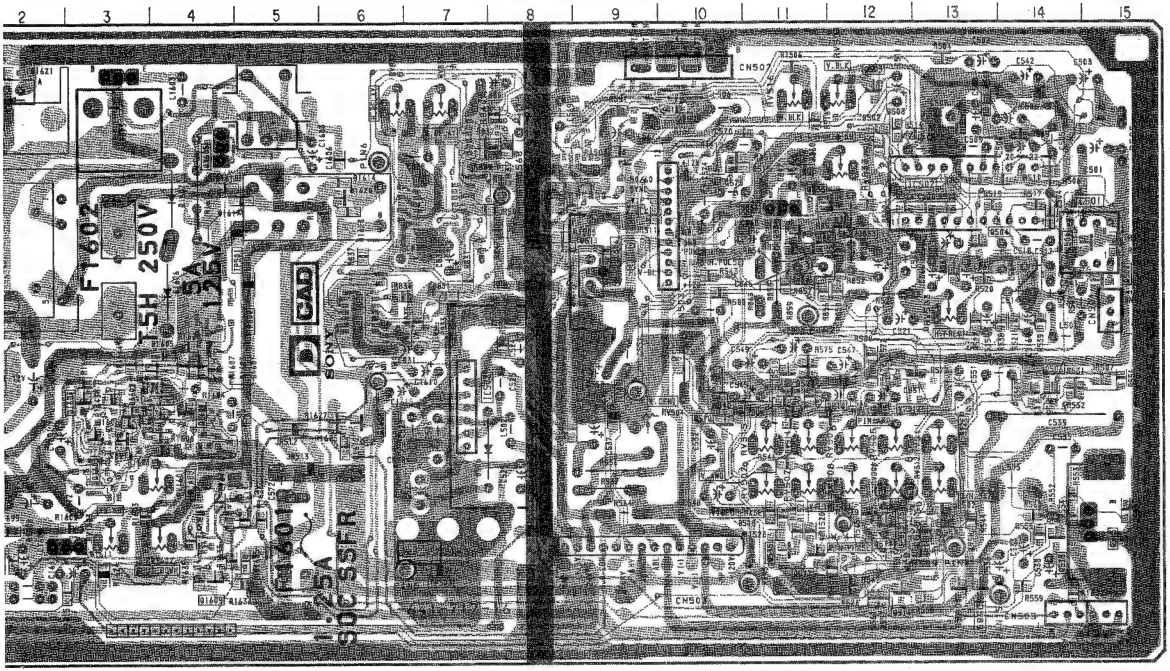

- : Pattern from the side which enables seeing.
- : Pattern of the rear side.

D Board (Conductor Side)

IC	
IC501	C – 15
IC502	C – 13
IC503	E – 7
IC504	D – 9

TRANSISTOR	
Q501	C – 15
Q502	D – 15
Q503	A – 12
Q504	C – 13
Q510	E – 10
Q513	G – 14
Q515	G – 15
Q518	E – 12
Q519	E – 11
Q589	B – 6
Q589	G – 13
Q833	C – 12
Q834	C – 11
Q835	C – 11
Q836	C – 11
Q1601	E – 4
Q1602	E – 4
Q1603	F – 3
Q1604	E – 3
Q1605	B – 4
Q1606	A – 3
Q1608	E – 6
Q1609	G – 4

DIODE	
D501	B – 13
D502	B – 12
D503	B – 12
D504	C – 14
D506	F – 7
D507	G – 15
D511	C – 8
D589	G – 13
D831	D – 7
D832	B – 7
D835	C – 12
D1601	E – 4
D1603	E – 4
D1606	D – 4
D1607	C – 4
D1608	G – 2
D1611	G – 3
D1612	F – 6
D1615	G – 2
D1617	C – 4
D1618	C – 4
D1620	C – 6
D1622	E – 4
D1623	F – 3
D1635	G – 5
D1699	G – 2

VARIABLE RESISTOR	
RV501	B – 12
RV502	F – 11
RV503	D – 13
RV504	E – 9
RV505	F – 12
RV506	F – 12
RV507	F – 11
RV508	F – 12
RV509	F – 12
RV511	F – 13
RV512	F – 13
RV514	F – 11
RV515	F – 11
RV516	B – 11
RV831	B – 7
RV832	B – 6
RV833	B – 12
RV1601	F – 4
RV1602	G – 4
RV1603	G – 3

B [SIGNAL PROCESS]

– B Board – – Component Side –

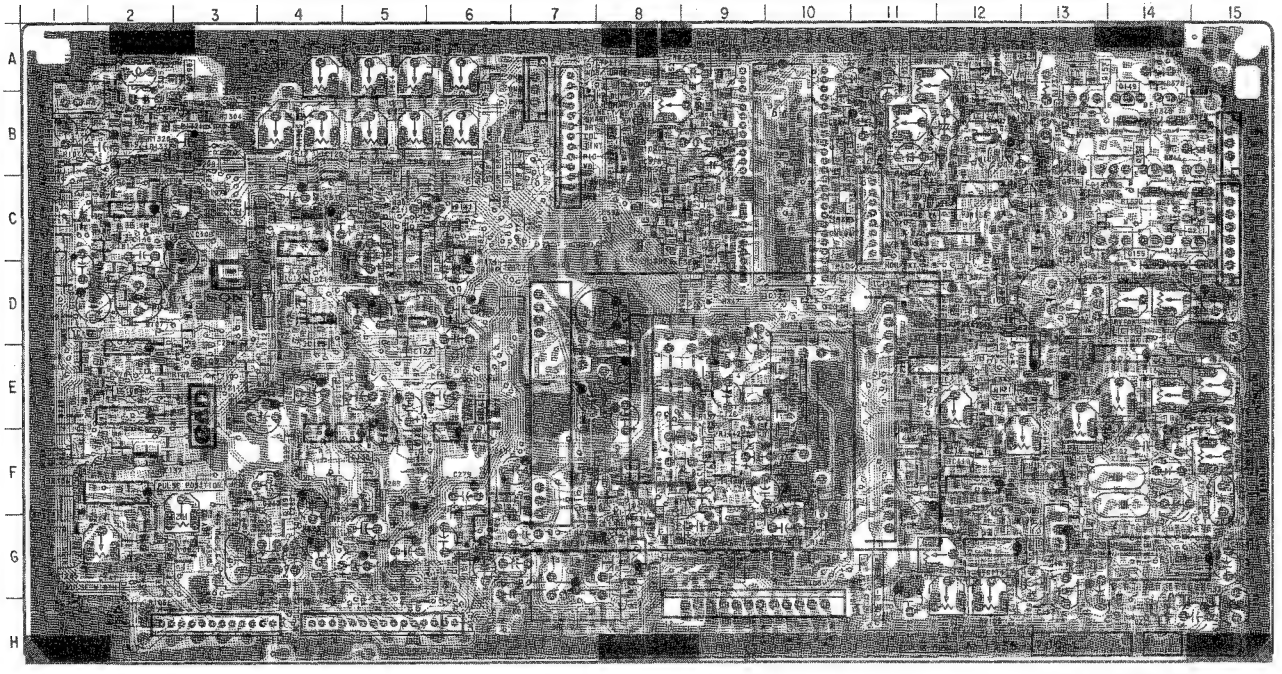

- : Pattern from the side which enables seeing.
- : Pattern of the rear side.

B Board (Component Side)

IC	
IC102	G – 9
IC103	G – 8
IC104	E – 9
IC105	G – 6
IC106	F – 2
IC107	E – 2
IC108	E – 2
IC109	C – 2
IC110	F – 12
IC111	E – 11
IC113	G – 14
IC114	G – 12
IC115	E – 14
IC116	D – 11
IC117	F – 6
IC118	F – 5
IC119	F – 4
IC120	C – 4
IC121	D – 5
IC122	D – 5
IC123	D – 4
IC125	C – 12
IC126	C – 12
IC127	C – 12
IC128	E – 13
IC129	B – 4

TRANSISTOR	
Q101	F – 6
Q104	G – 10
Q109	A – 12
Q115	C – 1
Q119	F – 12
Q121	E – 12
Q124	F – 11
Q129	G – 3
Q132	C – 5
Q136	F – 6
Q137	F – 5
Q138	F – 5
Q141	C – 6
Q150	G – 8
Q164	B – 12
Q166	D – 12
Q171	F – 9
Q176	F – 9
Q189	G – 4
Q191	B – 2
Q193	B – 1
Q196	B – 2
Q197	B – 2
Q198	A – 3
Q200	F – 8
Q204	B – 8
Q205	A – 9
Q206	A – 8
Q208	B – 3
Q212	C – 11
Q299	A – 11

DIODE	
D107	D – 2
D121	E – 4
D122	E – 4
D123	C – 4
D128	E – 1
D130	B – 13
D131	C – 14
D132	D – 14
D137	G – 11
D138	B – 13
D139	C – 13
D146	D – 12
D151	C – 5
D152	B – 4
D153	B – 4
D154	B – 13
D155	C – 13
D157	A – 13
D162	B – 11
D168	C – 9
D191	C – 1
D342	D – 12
D343	H – 2
D344	F – 8
D345	A – 14
D346	B – 14
D347	C – 14
D348	B – 14
D349	C – 14
D350	D – 14
D380	D – 1
D383	G – 3

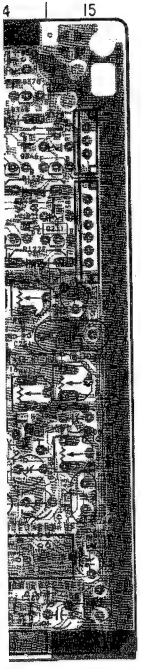

side which enables seeing.
r side.

B Board (Component Side)

IC	
IC102	G-9
IC103	G-8
IC104	E-9
IC105	G-6
IC106	F-2
IC107	E-2
IC108	E-2
IC109	C-2
IC110	F-12
IC111	E-11
IC113	G-14
IC114	G-12
IC115	E-14
IC116	D-11
IC117	F-8
IC118	F-5
IC119	F-4
IC120	C-4
IC121	D-5
IC122	D-5
IC123	D-4
IC125	C-12
IC126	C-12
IC127	C-12
IC128	E-13
IC129	B-4

TRANSISTOR	
Q101	F-6
Q104	G-10
Q109	A-12
Q115	C-1
Q119	F-12
Q121	E-12
Q124	F-11
Q128	G-3
Q132	C-5
Q136	F-6
Q137	F-6
Q138	F-5
Q141	C-6
Q150	G-8
Q164	B-12
Q166	D-12
Q171	F-9
Q176	F-9
Q189	G-4
Q191	B-2
Q193	B-1
Q196	B-2
Q197	B-2
Q198	A-3
Q200	F-8
Q204	B-9
Q205	A-9
Q206	A-8
Q208	B-3
Q212	C-11
Q299	A-11

DIODE	
D107	D-2
D121	E-4
D122	E-4
D123	C-4
D128	E-1
D130	B-13
D131	C-14
D132	D-14
D137	G-11
D138	B-13
D139	C-13
D146	D-12
D151	C-5
D152	B-4
D153	B-4
D154	B-13
D156	C-13
D157	A-13
D162	B-11
D166	C-9
D181	C-1
D342	D-12
D343	H-2
D344	F-6
D345	A-14
D346	B-14
D347	C-14
D348	B-14
D349	C-14
D350	D-14
D390	D-1
D393	G-3

– B Board – – Conductor Side –

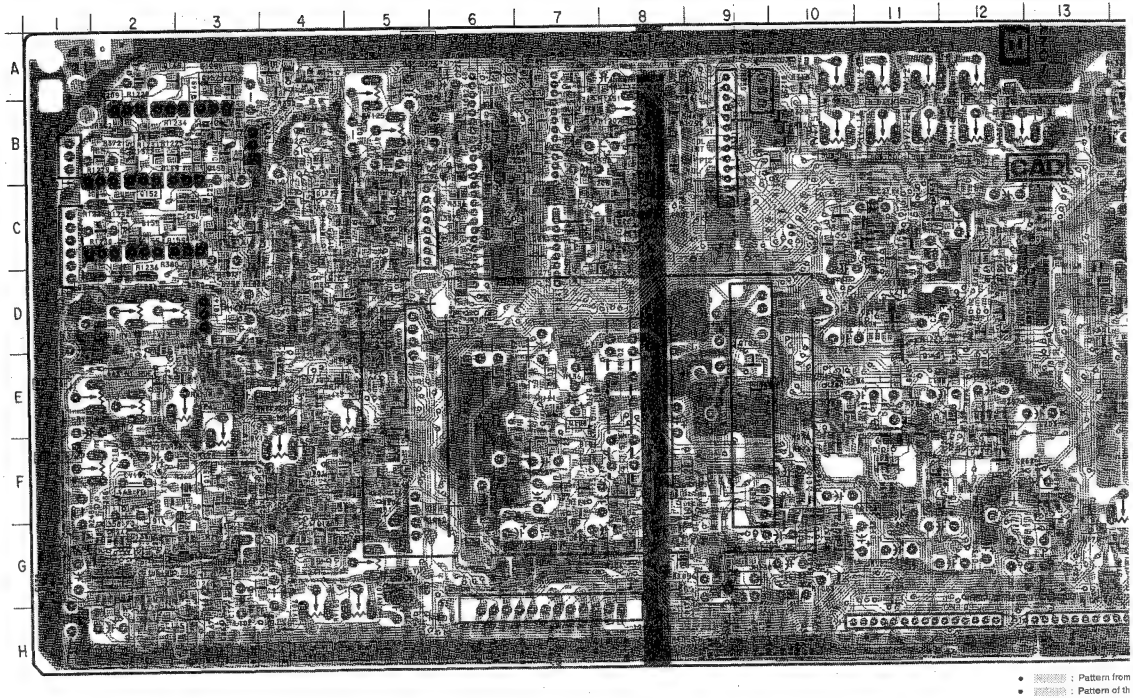

• : Pattern from
• : Pattern of th

Side –

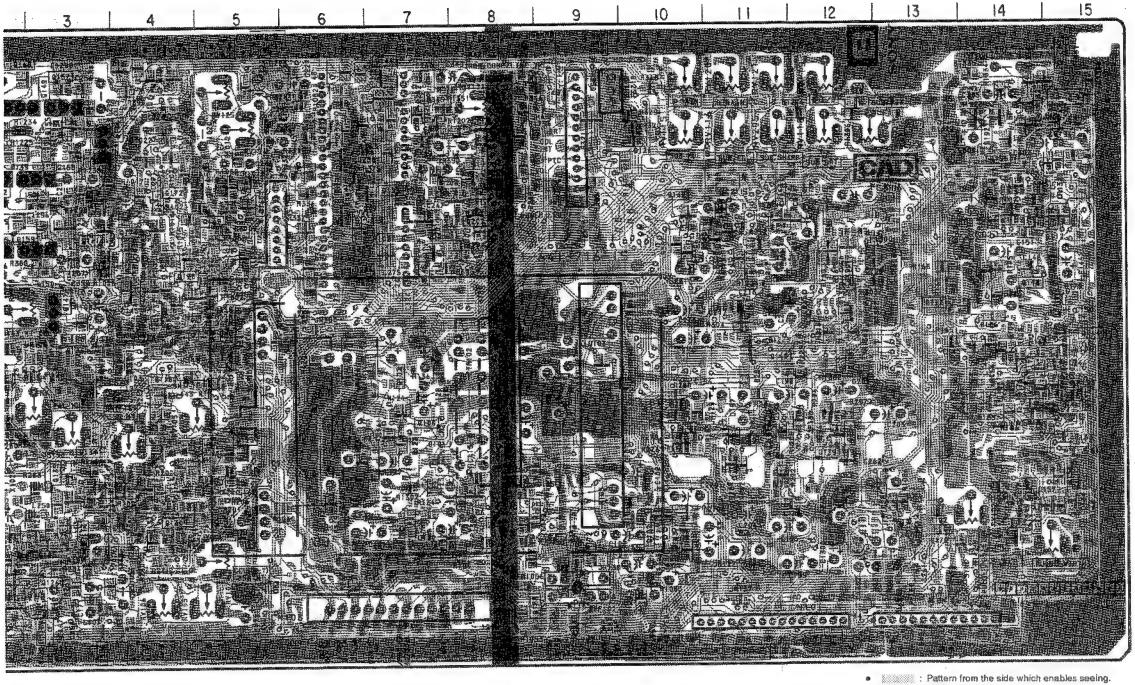

• ▒▒▒ : Pattern from the side which enables seeing.
• ▒▒▒ : Pattern of the rear side.

B Board (Conductor Side)

IC	
IC1162	G – 3
IC1124	C – 7

TRANSISTOR	
Q102	G – 10
Q103	E – 9
Q106	F – 10
Q107	E – 7
Q108	E – 7
Q112	D – 14
Q113	D – 14
Q114	D – 15
Q116	E – 15
Q117	F – 15
Q118	E – 4
Q120	F – 4
Q122	F – 4
Q123	F – 5
Q125	H – 2
Q126	G – 3
Q127	H – 4
Q128	H – 3
Q130	G – 4
Q131	G – 2
Q133	G – 3
Q134	F – 3
Q135	F – 3
Q139	F – 12
Q140	E – 11
Q142	C – 10
Q143	C – 11
Q144	A – 7
Q145	C – 7
Q146	B – 3
Q147	D – 3
Q148	A – 2
Q149	B – 2
Q151	B – 2
Q152	B – 2
Q153	C – 7
Q154	C – 2
Q155	C – 2
Q157	B – 3
Q158	B – 3
Q159	C – 3
Q160	A – 4
Q161	C – 3
Q165	D – 4
Q167	C – 5
Q168	C – 5
Q170	C – 4
Q172	C – 4
Q173	D – 4
Q174	C – 4
Q175	C – 4
Q177	A – 4
Q179	A – 4
Q190	C – 12
Q192	B – 14
Q194	B – 15
Q195	B – 14
Q199	A – 15
Q201	C – 7
Q202	C – 8
Q203	C – 8
Q210	B – 2
Q211	C – 2

DIODE	
D104	F – 7
D105	G – 8
D106	D – 14
D108	E – 14
D109	E – 14
D110	F – 14
D111	F – 15
D112	C – 15
D113	C – 14
D117	E – 14
D120	H – 3
D125	A – 10
D126	B – 10
D127	F – 13
D129	H – 2
D133	B – 6
D134	C – 6
D135	C – 6
D136	D – 3
D144	D – 4
D145	D – 4
D147	A – 5
D148	B – 3
D149	B – 2
D150	D – 3
D155	B – 3
D158	B – 3
D159	C – 2
D160	D – 12
D161	D – 12
D170	G – 13
D186	E – 14
D188	F – 8
D187	G – 14
D285	E – 11
D289	B – 8
D341	B – 14
D1382	D – 12

VARIABLE RESISTOR	
RV101	G – 15
RV102	G – 14
RV103	E – 4
RV104	F – 4
RV105	H – 5
RV106	H – 4
RV107	G – 5
RV108	D – 2
RV109	F – 1
RV110	E – 1
RV111	D – 2
RV112	E – 2
RV113	F – 3
RV114	E – 3
RV115	A – 10
RV116	B – 11
RV118	B – 12
RV119	A – 12
RV120	A – 11
RV121	A – 11
RV122	A – 10
RV123	B – 8
RV124	B – 5
RV125	A – 5
RV205	B – 11

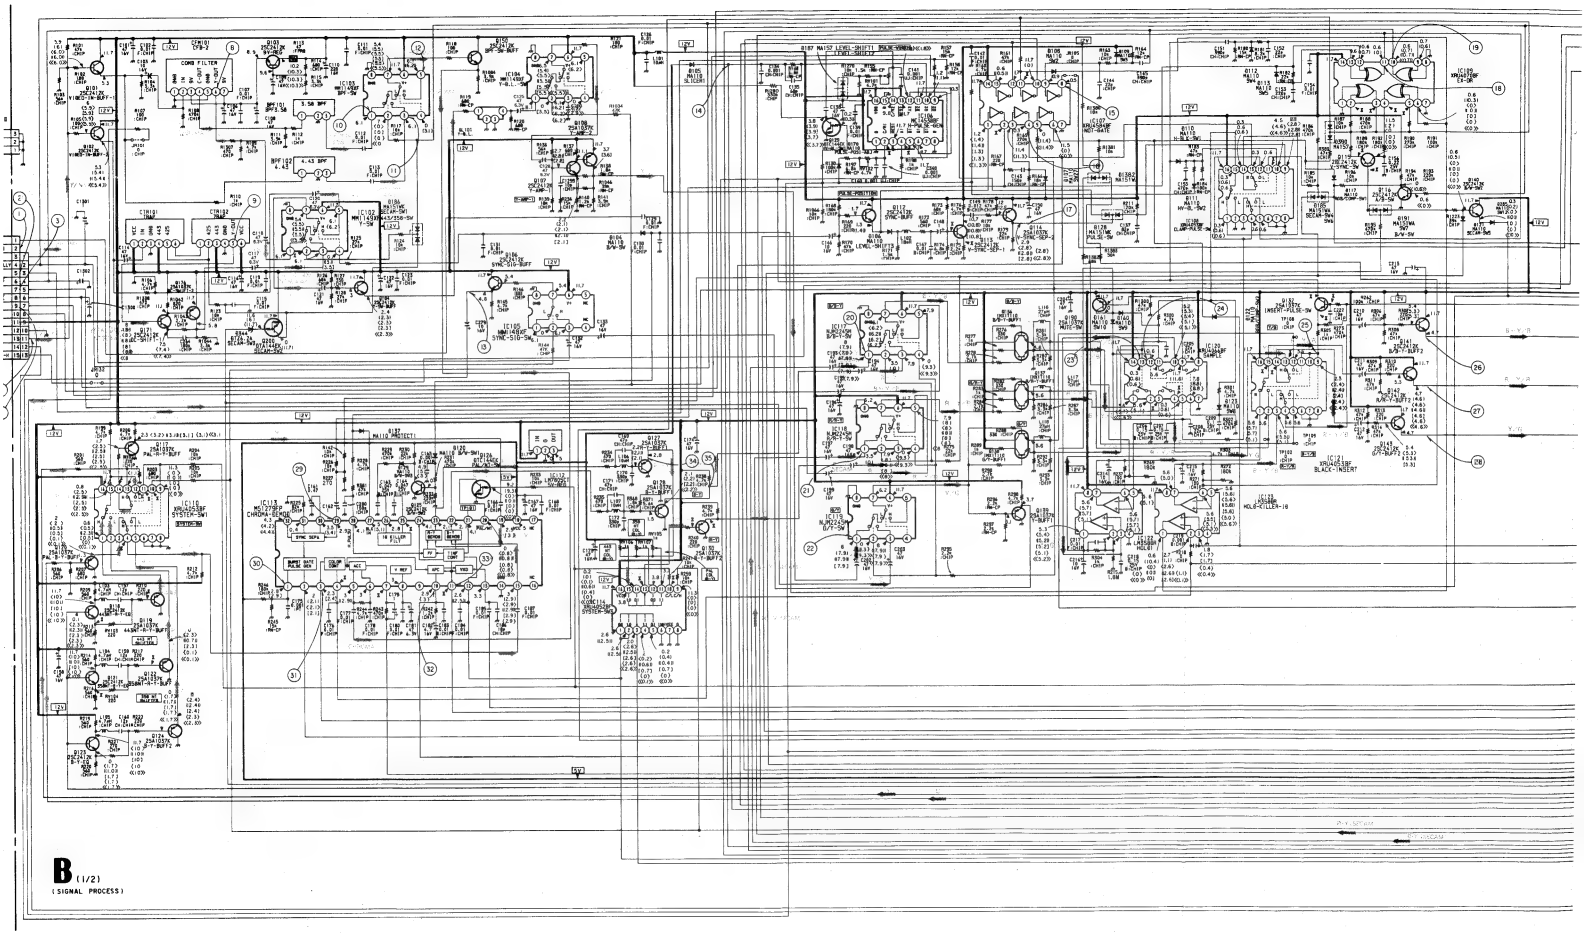

B (1/2)
(SIGNAL PROCESS)

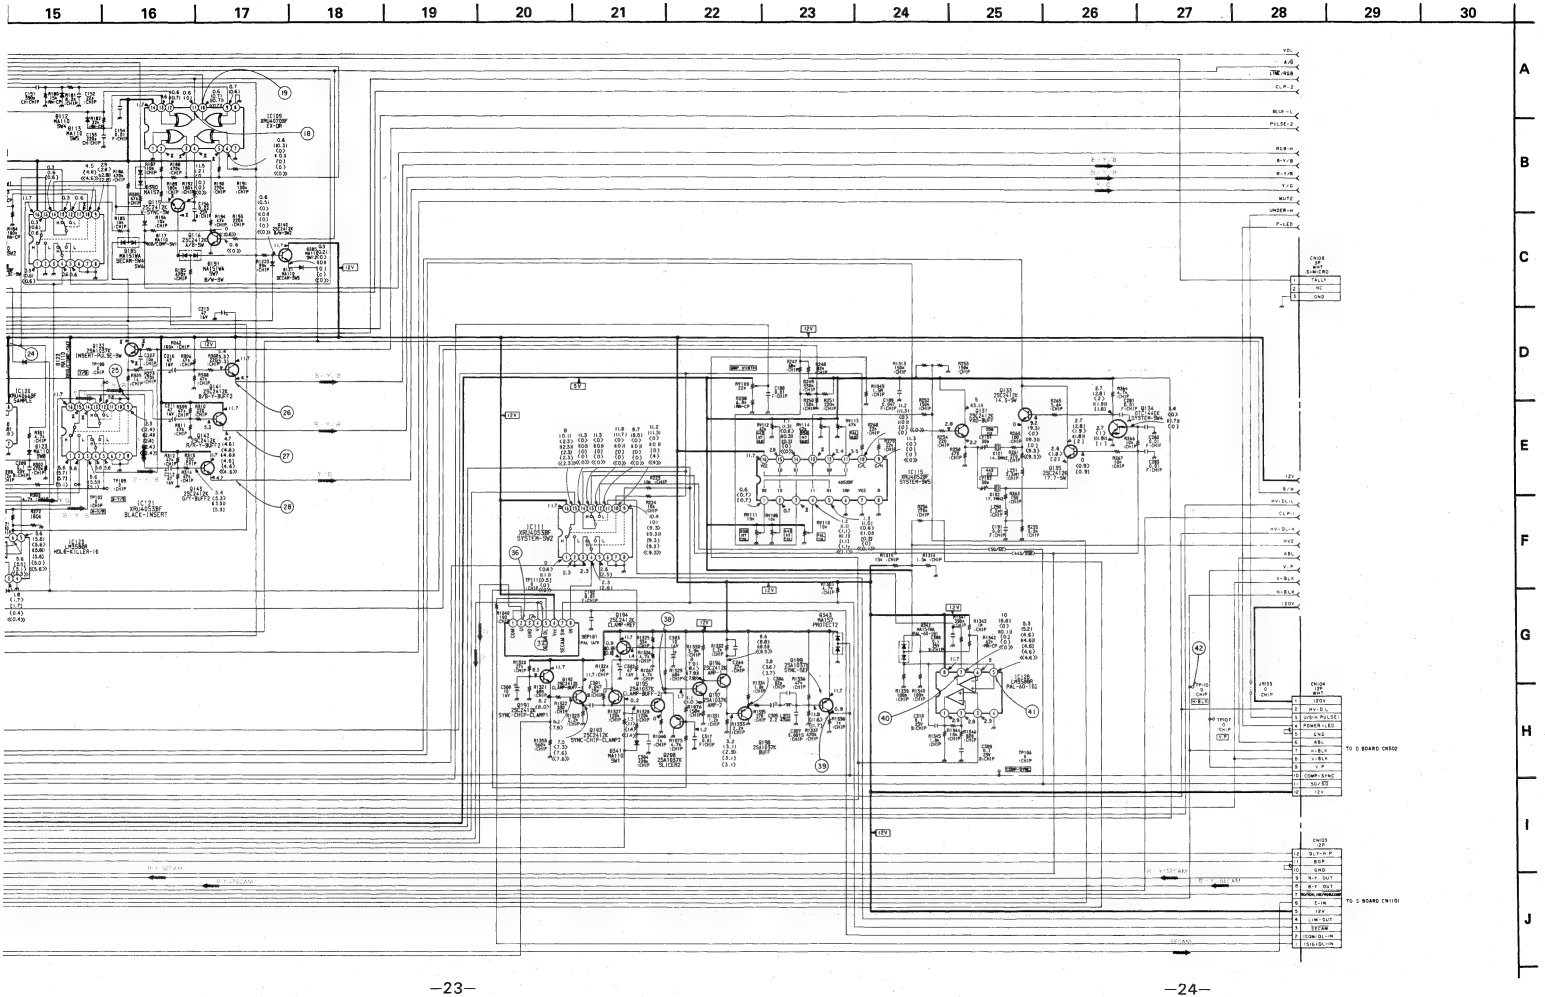
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
A
B
C
D
E
F
G
H
I
J
CN08
TALLY
NC
GND
CN04
120V
HV-DL
HS/H-PULSE
POWER-LED
GND
ABL
H-BLK
V-BLK
V-P
COMP-SYNC
50/60
12V
TO D BOARD CN502
CN03
SLY-H.P.
BSP
GND
R-Y OUT
B-Y OUT
NATION. HD/PROGRAM
CLIN
12V
LUM OUT
SYCAM
ICON-DL-IN
TALLY-IN
TO S BOARD CN103

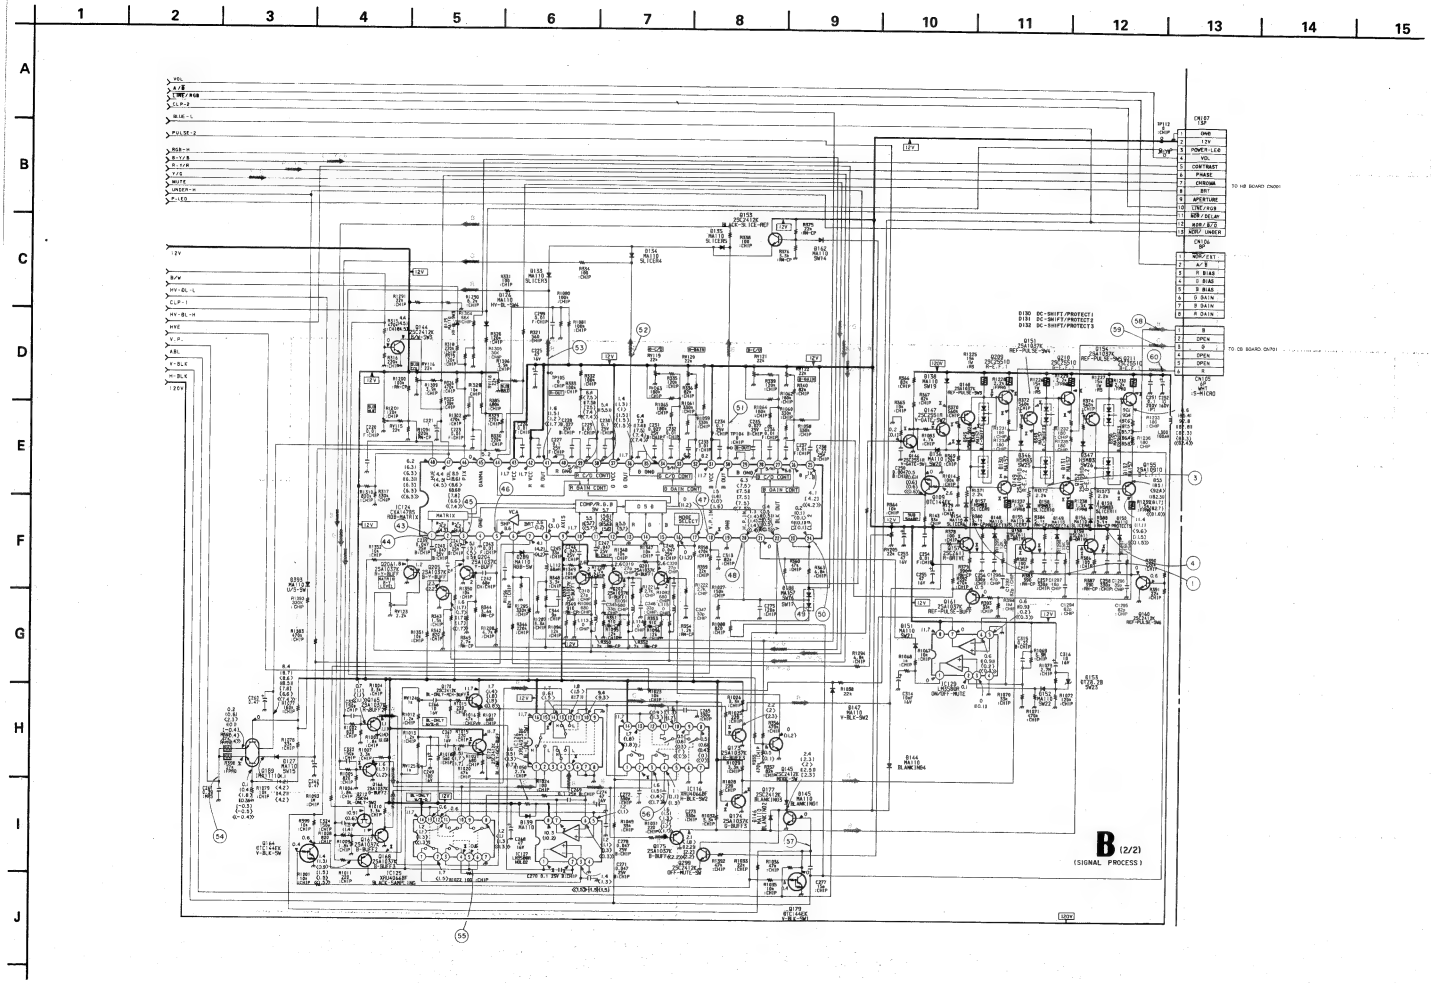
B (2/2)
(SIGNAL PROCESS)

— B Board —

< TRANSISTOR >

		PAL	SECAM	NTSC 3.58	NTSC 4.43	S (Y/C)	ANALOG RGB	COMPO-NENT
Q113	E	0.5	0.5	0.4	0.4	0.5	0.5	0.5
	B	1.0	1.0	0.9	0.9	0.9	0.9	1.0
Q115	E	11.2	9.3	0.0	10.6	0.0	0.0	0.0
	B	2.8	2.2	0.1	2.4	0.1	0.1	0.0
Q116	E	0.0	0.0	1.7	1.7	1.7	1.7	1.7
Q119	B	0.1	0.0	1.7	1.7	1.7	1.7	1.7
Q121	E	0.0	0.0	1.7	1.7	1.7	1.7	1.7
Q122	B	0.0	0.0	1.7	1.7	1.7	1.7	1.7
Q130	E	4.3	4.3	4.4	4.4	4.5	4.4	4.4
	B	3.7	3.7	3.8	3.8	3.9	3.8	3.8
Q132	E	2.3	2.3	2.4	2.3	2.4	2.4	2.4
	C	1.8	1.7	1.7	1.7	1.7	1.8	1.8
	B	2.7	2.6	2.6	2.7	2.6	2.7	2.6
Q146	C	116.7	114.4	110.4	113.2	113.7	114.3	114.1
Q147	E	117.8	115.6	111.6	114.5	115.0	115.5	115.4
	C	126.0	123.5	120.3	123.4	123.8	124.6	124.4
	B	119.6	119.5	110.5	118.4	118.2	114.2	114.2
Q148	C	86.1	84.9	91.2	83.4	82.6	82.5	82.2
	B	94.0	93.3	86.3	92.4	92.1	94.2	90.8
Q149	E	1.6	1.6	1.4	1.7	1.7	1.7	1.7
	C	86.1	84.9	91.2	83.4	82.7	82.5	82.5
Q151	E	90.7	91.4	98.0	87.9	87.0	86.5	86.4
	C	89.2	89.8	98.5	86.4	85.3	84.9	84.7
	B	92.1	92.7	100.2	89.5	92.4	90.5	88.9
Q152	E	86.1	86.0	92.6	82.6	82.9	82.8	82.7
	C	10.8	10.5	9.7	10.9	10.9	10.9	11.0
Q154	B	92.5	92.9	99.8	90.1	88.7	90.4	89.2
Q155	B	88.3	86.5	95.7	85.7	83.9	84.8	83.9
Q157	E	82.4	81.1	87.5	79.9	79.9	80.8	79.4
	B	86.0	84.8	91.2	84.4	82.7	82.5	82.1
Q158	E	1.6	1.5	1.3	1.6	1.6	1.7	1.7
	B	2.1	2.0	1.8	2.1	2.2	2.2	2.2
Q159	E	1.6	1.6	1.3	1.6	1.7	1.7	1.7
	B	2.2	2.1	1.5	2.1	2.2	2.2	2.2
Q163	E	0.2	0.8	2.7	0.5	-0.5	-0.7	-0.8
Q168	B	0.9	0.9	0.8	1.0	1.0	1.0	1.0
Q169	C	2.1	2.0	1.8	2.1	2.2	2.1	2.2
Q170	B	2.3	2.3	2.1	2.4	2.4	2.4	2.4
Q172	B	2.2	2.1	1.9	2.2	2.3	2.2	2.3
Q173	B	1.7	1.6	1.4	1.7	1.7	1.7	1.7
Q174	E	2.1	2.0	1.6	2.1	2.2	2.2	2.2
	B	1.6	1.5	1.3	1.6	1.6	1.7	1.7
Q178	B	6.2	6.3	6.2	6.3	6.1	6.2	6.2
Q209	E	83.4	81.5	87.9	80.3	80.4	80.4	79.8
	C	115.8	113.2	110.7	113.2	113.8	114.5	114.2
	B	87.8	86.4	92.8	85.0	84.3	84.2	83.8
Q210	E	86.5	86.3	93.1	83.0	83.3	83.0	82.8
	C	116.5	114.2	111.5	113.9	114.5	115.1	114.9
Q211	C	115.9	113.6	111.7	113.3	113.8	114.5	114.3

< IC >

		PAL	SECAM	NTSC 3.58	NTSC 4.43	S (Y/C)	ANALOG RGB	COMPO-NENT
IC102	②	6.8	6.8	0.0	6.8	0.0	0.0	0.0
IC108	②	0.2	0.1	0.1	0.1	0.1	0.1	0.2
	④	1.8	1.7	1.7	1.7	1.7	1.8	1.8
IC107	⑫	10.7	10.7	10.6	10.6	10.6	10.6	10.6
	⑬	1.2	10.7	0.0	0.0	0.0	0.0	0.0
IC108	⑪	9.7	0.4	9.7	9.6	9.6	1.1	9.6
IC109	⑫	11.3	11.3	0.0	10.8	0.0	0.0	0.0
	⑤	11.3	11.4	0.0	11.3	0.0	0.0	0.0
	⑥	11.7	0.0	0.0	11.7	0.0	0.0	0.0
	⑤	11.0	11.1	0.0	11.0	0.0	0.0	0.0
IC110	⑥	2.1	2.2	2.5	2.5	2.5	2.5	2.5
	⑭	11.3	11.3	0.0	11.3	0.0	0.0	0.0
	⑪	11.3	11.3	0.0	0.0	0.0	0.0	0.0
	⑬	0.8	0.8	2.5	2.5	2.5	2.5	2.5
	⑭	1.7	1.7	2.5	2.6	2.5	2.5	2.5
IC113	⑥	2.7	1.1	2.6	2.6	2.6	1.1	1.1
	⑦	4.2	4.3	4.2	4.3	4.3	4.8	4.8
	⑪	3.0	2.9	2.8	3.0	2.8	2.9	2.9
	⑭	2.2	2.5	2.9	2.2	1.9	2.8	2.8
IC114	⑭	11.4	11.3	0.0	0.0	0.0	0.0	0.0
	⑬	3.7	3.7	3.8	3.8	3.8	3.9	3.9
IC115	⑪	1.2	1.1	0.6	0.7	0.7	0.6	0.6
	⑭	3.5	3.5	3.4	2.8	3.4	3.4	3.4
IC118	⑦	0.0	0.0	1.0	1.1	1.1	1.3	1.1
IC120	⑪	5.5	5.6	5.6	5.6	5.6	5.6	5.6
	⑭	5.5	5.6	5.6	5.6	5.6	5.0	5.6
IC121	⑭	5.3	5.3	5.4	5.2	5.2	5.1	5.1
	⑭	5.8	5.7	5.6	5.6	5.7	5.7	5.7
	⑥	5.9	5.7	5.6	5.6	5.7	5.7	5.6
IC122	⑦	5.3	5.3	5.4	5.2	5.2	5.1	5.1
	⑪	5.3	5.3	5.4	5.2	5.2	5.1	5.1
IC124	⑭	0.1	0.1	0.2	0.2	0.2	0.2	0.2
IC125	⑭	1.4	1.4	1.3	1.4	1.5	1.5	1.5
IC126	⑭	1.9	1.5	1.3	1.9	1.8	1.7	1.9
	⑭	1.6	1.5	1.3	1.9	1.6	1.6	1.7
	⑭	1.7	1.6	1.4	1.7	1.7	1.8	1.7
IC127	⑪	3.0	2.9	2.8	3.0	3.1	3.0	3.0
	⑦	1.4	1.4	1.3	1.5	1.5	1.5	1.5
	⑦	2.1	2.7	2.4	2.8	2.8	2.8	2.8

• B BOARD WAVEFORMS

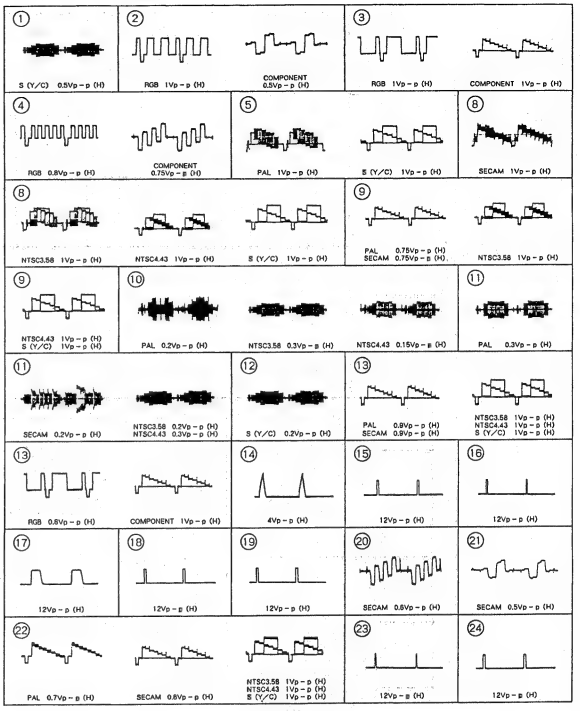

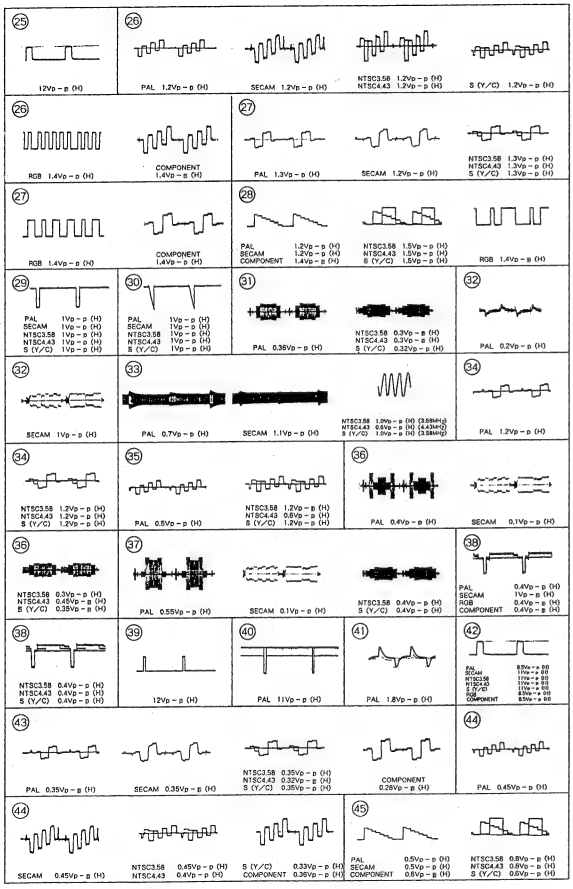

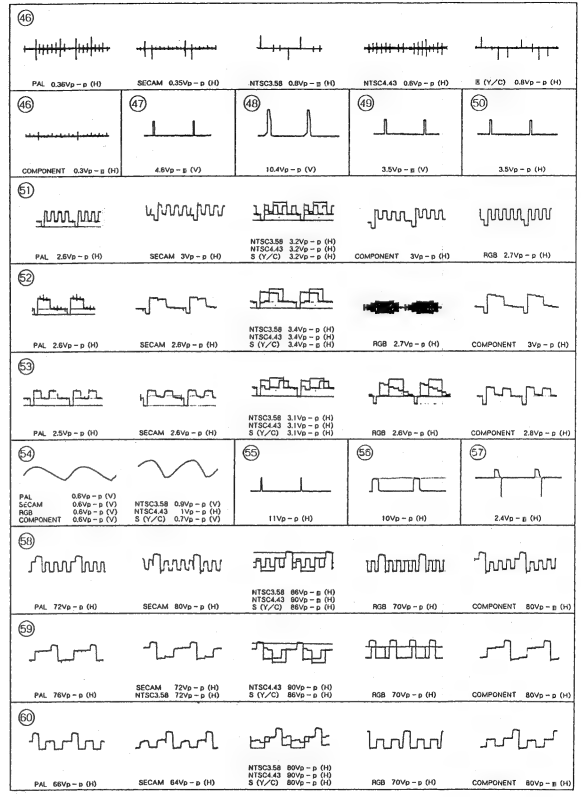

NOTE:

The components identified b
shading and mark ⚠ are crit
cal for safety.
Replace only with part numbe
specified.

Les composants identifiés pa
une trame et une marque ⚠
sont critiques pour la securite
Ne les remplacer que par un
piece portant le numero specifie

REF.NO.	PART NO.	DE
	*A-1135-726-A	B B(
		****
	<FILTER>	
BPF101	1-236-363-11	FILT
BPF102	1-236-364-11	FILT
	<CAPACITO	
C101	1-124-589-11	ELEC
C102	1-163-031-11	CERA
C103	1-126-157-11	ELEC
C106	1-124-477-11	ELEC
C107	1-163-031-11	CERA
C108	1-124-477-11	ELEC
C109	1-124-477-11	ELEC
C110	1-124-120-11	ELEC
C111	1-163-031-11	CERA
C112	1-163-031-11	CERA
C113	1-163-031-11	CERA
C114	1-124-477-11	ELEC
C115	1-163-031-11	CERA
C116	1-124-589-11	ELEC
C117	1-126-154-11	ELEC
C118	1-126-154-11	ELEC
C119	1-163-031-11	CERA
C120	1-126-154-11	ELEC
C121	1-124-477-11	ELEC
C122	1-124-477-11	ELEC
C123	1-163-031-11	CERA
C125	1-126-154-11	ELEC
C126	1-163-031-11	CERA
C128	1-126-154-11	ELEC
C129	1-163-031-11	CERA
C130	1-163-031-11	CERA
C131	1-163-031-11	CERA
C132	1-124-589-11	ELEC
C133	1-124-589-11	ELEC
C134	1-163-275-11	CERA
C135	1-163-113-00	CERA
C137	1-163-115-00	CERA
C138	1-124-589-11	ELEC
C139	1-163-031-11	CERA
C140	1-163-205-00	CERA
C141	1-163-141-00	CERA
C142	1-163-031-11	CERA
C143	1-163-121-00	CERA
C144	1-163-101-00	CERA
C145	1-163-131-00	CERA
C146	1-126-157-11	ELEC

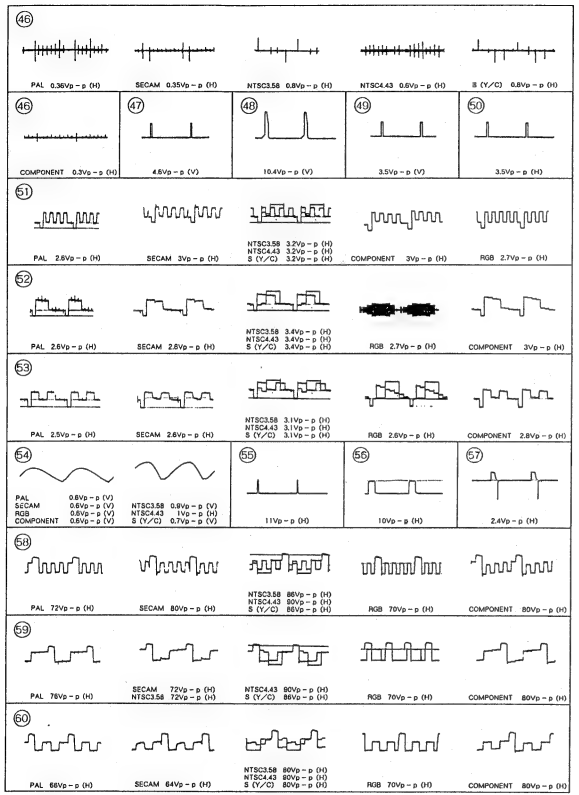

SECTION 2
ELECTRICAL PARTS LIST

B

NOTE:

The components identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

RESISTORS
- All resistors are in ohms
- F : nonflammable

When indicating parts by reference number, please include the board name.

CAPACITORS
- MF : μF, PF : μμF

COILS
- MMH : mH, UH : μH

- The components identified by ★ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally replaced.

REF.NO.	PART NO.	DESCRIPTION			REMARK
	*A-1135-726-A	B BOARD, COMPLETE **********			
		<FILTER>			
BPF101	1-236-363-11	FILTER, BAND PASS			
BPF102	1-236-364-11	FILTER, BAND PASS			
		<CAPACITOR>			
C101	1-124-589-11	ELECT 47MF	20%	16V	
C102	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C103	1-126-157-11	ELECT 10MF	20%	16V	
C106	1-124-477-11	ELECT 47MF	20%	16V	
C107	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C108	1-124-477-11	ELECT 47MF	20%	16V	
C109	1-124-477-11	ELECT 47MF	20%	16V	
C110	1-124-120-11	ELECT 220MF	20%	16V	
C111	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C112	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C113	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C114	1-124-477-11	ELECT 47MF	20%	16V	
C115	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C116	1-124-589-11	ELECT 47MF	20%	16V	
C117	1-126-154-11	ELECT 47MF	20%	6.3V	
C118	1-126-154-11	ELECT 47MF	20%	6.3V	
C119	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C120	1-126-154-11	ELECT 47MF	20%	6.3V	
C121	1-124-477-11	ELECT 47MF	20%	16V	
C122	1-124-477-11	ELECT 47MF	20%	16V	
C123	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C125	1-126-154-11	ELECT 47MF	20%	6.3V	
C126	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C128	1-126-154-11	ELECT 47MF	20%	6.3V	
C129	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C130	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C131	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C132	1-124-589-11	ELECT 47MF	20%	16V	
C133	1-124-589-11	ELECT 47MF	20%	16V	
C134	1-163-275-11	CERAMIC CHIP 0.001MF	5%	50V	
C135	1-163-113-00	CERAMIC CHIP 68PF	5%	50V	
C137	1-163-115-00	CERAMIC CHIP 82PF	5%	50V	
C138	1-124-589-11	ELECT 47MF	20%	16V	
C139	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C140	1-163-205-00	CERAMIC CHIP 0.001MF	5%	50V	
C141	1-163-141-00	CERAMIC CHIP 0.001MF	5%	50V	
C142	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C143	1-163-121-00	CERAMIC CHIP 150PF	5%	50V	
C144	1-163-101-00	CERAMIC CHIP 22PF	5%	50V	
C145	1-163-131-00	CERAMIC CHIP 390PF	5%	50V	
C146	1-126-157-11	ELECT 10MF	20%	16V	
C147	1-164-232-11	CERAMIC CHIP 0.01MF	10%	50V	
C148	1-126-160-11	ELECT 1MF	20%	50V	
C149	1-163-022-00	CERAMIC CHIP 0.012MF	10%	50V	
C150	1-124-589-11	ELECT 47MF	20%	16V	
C151	1-163-131-00	CERAMIC CHIP 390PF	5%	50V	
C152	1-163-101-00	CERAMIC CHIP 22PF	5%	50V	
C153	1-163-125-00	CERAMIC CHIP 220PF	5%	50V	
C154	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C155	1-163-133-00	CERAMIC CHIP 470PF	5%	50V	
C156	1-164-299-11	CERAMIC CHIP 0.22MF	10%	25V	
C157	1-163-229-11	CERAMIC CHIP 12PF	5%	50V	
C158	1-124-477-11	ELECT 47MF	20%	16V	
C159	1-163-229-11	CERAMIC CHIP 12PF	5%	50V	
C160	1-163-229-11	CERAMIC CHIP 12PF	5%	50V	
C161	1-124-902-00	ELECT 0.47MF	20%	50V	
C162	1-124-903-11	ELECT 1MF	20%	50V	
C163	1-163-809-11	CERAMIC CHIP 0.047MF	10%	25V	
C164	1-163-809-11	CERAMIC CHIP 0.047MF	10%	25V	
C165	1-163-009-11	CERAMIC CHIP 0.001MF	10%	50V	
C166	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C167	1-124-477-11	ELECT 47MF	20%	16V	
C168	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C169	1-163-243-11	CERAMIC CHIP 47PF	5%	50V	
C170	1-163-129-00	CERAMIC CHIP 330PF	5%	50V	
C171	1-163-243-11	CERAMIC CHIP 47PF	5%	50V	
C172	1-163-129-00	CERAMIC CHIP 330PF	5%	50V	
C173	1-124-589-11	ELECT 47MF	20%	16V	
C174	1-124-477-11	ELECT 47MF	20%	16V	
C175	1-108-792-11	MYLAR 0.001MF	5%	50V	
C176	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C177	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C178	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C179	1-126-160-11	ELECT 1MF	20%	50V	
C180	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C181	1-126-154-11	ELECT 47MF	20%	6.3V	
C182	1-126-163-11	ELECT 4.7MF	20%	16V	
C183	1-164-232-11	CERAMIC CHIP 0.01MF	10%	50V	
C184	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C185	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C186	1-163-099-00	CERAMIC CHIP 18PF	5%	50V	
C187	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C188	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C189	1-163-035-00	CERAMIC CHIP 0.047MF		50V	
C190	1-163-121-00	CERAMIC CHIP 150PF	5%	50V	
C191	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C192	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C193	1-124-589-11	ELECT 47MF	20%	16V	
C194	1-124-589-11	ELECT 47MF	20%	16V	
C195	1-124-589-11	ELECT 47MF	20%	16V	
C196	1-124-589-11	ELECT 47MF	20%	16V	
C197	1-124-589-11	ELECT 47MF	20%	16V	

B

REF.NO.	PART NO.	DESCRIPTION			REMARK
C198	1-124-589-11	ELECT	47MF	20%	16V
C199	1-124-589-11	ELECT	47MF	20%	16V
C202	1-124-589-11	ELECT	47MF	20%	16V
C203	1-124-589-11	ELECT	47MF	20%	16V
C204	1-124-589-11	ELECT	47MF	20%	16V
C205	1-163-101-00	CERAMIC CHIP	22PF	5%	50V
C206	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C207	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C208	1-163-101-00	CERAMIC CHIP	22PF	5%	50V
C209	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C210	1-124-589-11	ELECT	47MF	20%	16V
C211	1-124-589-11	ELECT	47MF	20%	16V
C212	1-124-589-11	ELECT	47MF	20%	16V
C213	1-124-589-11	ELECT	47MF	20%	16V
C214	1-126-157-11	ELECT	10MF	20%	16V
C215	1-126-157-11	ELECT	10MF	20%	16V
C216	1-126-157-11	ELECT	10MF	20%	16V
C217	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C218	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C219	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C220	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C221	1-124-903-11	ELECT	1MF	20%	50V
C222	1-163-093-00	CERAMIC CHIP	10PF	5%	50V
C223	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C225	1-124-477-11	ELECT	47MF	20%	16V
C226	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C227	1-163-038-00	CERAMIC CHIP	0.1MF		25V
C228	1-163-986-00	CERAMIC CHIP	0.027MF	10%	25V
C229	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C230	1-163-038-00	CERAMIC CHIP	0.1MF		25V
C231	1-163-986-00	CERAMIC CHIP	0.027MF	10%	25V
C232	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C233	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C234	1-163-038-00	CERAMIC CHIP	0.1MF		25V
C235	1-163-986-00	CERAMIC CHIP	0.027MF	10%	25V
C236	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C237	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C238	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C239	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C240	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C241	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C242	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C243	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C244	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C245	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C246	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C247	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C248	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C249	1-126-101-11	ELECT	100MF	20%	16V
C250	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C251	1-110-364-11	MYLAR	0.1MF	10%	200V
C252	1-124-046-00	ELECT	10MF	20%	160V
C253	1-124-477-11	ELECT	47MF	20%	16V
C254	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C255	1-124-477-11	ELECT	47MF	20%	16V
C256	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C257	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C258	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C260	1-124-465-00	ELECT	0.47MF	20%	50V
C261	1-137-193-11	FILM	0.39MF	5%	50V
C262	1-124-465-00	ELECT	0.47MF	20%	50V
C263	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C264	1-163-123-00	CERAMIC CHIP	180PF	5%	50V
C265	1-163-129-00	CERAMIC CHIP	330PF	5%	50V

REF.NO.	PART NO.	DESCRIPTION			REMARK
C266	1-126-320-11	ELECT	10MF	20%	16V
C267	1-126-320-11	ELECT	10MF	20%	16V
C268	1-124-477-11	ELECT	47MF	20%	16V
C269	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C270	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C271	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C272	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C273	1-163-129-00	CERAMIC CHIP	330PF	5%	50V
C274	1-124-477-11	ELECT	47MF	20%	16V
C275	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C277	1-163-097-00	CERAMIC CHIP	15PF	5%	50V
C278	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C279	1-126-157-11	ELECT	10MF	20%	16V
C280	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C281	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C282	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C283	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C299	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C300	1-126-157-11	ELECT	10MF	20%	16V
C301	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C302	1-124-589-11	ELECT	47MF	20%	16V
C303	1-126-157-11	ELECT	10MF	20%	16V
C304	1-163-125-00	CERAMIC CHIP	220PF	5%	50V
C305	1-124-257-00	ELECT	2.2MF	20%	50V
C306	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C307	1-163-145-00	CERAMIC CHIP	0.0015MF	5%	50V
C308	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C309	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C310	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C313	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C314	1-126-157-11	ELECT	10MF	20%	16V
C315	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C316	1-126-157-11	ELECT	10MF	20%	16V
C317	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C318	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C319	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C320	1-163-103-00	CERAMIC CHIP	27PF	5%	50V
C321	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C322	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C324	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C340	1-163-205-00	CERAMIC CHIP	0.001MF	5%	50V
C344	1-163-092-00	CERAMIC CHIP	9PF	0.25PF	50V
C345	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C346	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C347	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C1293	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C1294	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C1295	1-163-115-00	CERAMIC CHIP	82PF	5%	50V
C1296	1-163-107-00	CERAMIC CHIP	39PF	5%	50V
C1297	1-163-099-00	CERAMIC CHIP	18PF	5%	50V
C1298	1-163-109-00	CERAMIC CHIP	47PF	5%	50V
C1299	1-163-093-00	CERAMIC CHIP	10PF	5%	50V
C1300	1-126-160-11	ELECT	1MF	20%	50V
C1301	1-126-160-11	ELECT	1MF	20%	50V
C1302	1-126-160-11	ELECT	1MF	20%	50V

<FILTER BLOCK>

CFM101	1-464-880-11	FILTER BLOCK, COM (CFB-2)	

<CONNECTOR>

CN101	1-506-478-11	PIN, CONNECTOR 13P	

B B

REF.NO.	PART NO.	DESCRIPTION	REMARK
CN102	*1-564-506-11	PLUG, CONNECTOR 3P	
CN103	*1-565-503-11	CONNECTOR, BOARD TO BOARD 12P	
CN104	1-506-477-11	PIN, CONNECTOR 12P	
CN105	*1-564-509-11	PLUG, CONNECTOR 6P	
CN107	1-506-478-11	PIN, CONNECTOR 13P	

<TRAP MODULE>

CTR101	1-236-366-11	MODULE, TRAP	
CTR102	1-236-365-11	MODULE, TRAP	

<TRIMMER>

CV101	1-141-418-11	CAP, ADJ	
CV102	1-141-418-11	CAP, ADJ	

<DIODE>

D104	8-719-404-46	DIODE MA110	
D105	8-719-404-46	DIODE MA110	
D106	8-719-404-46	DIODE MA110	
D107	8-719-404-46	DIODE MA110	
D108	8-719-404-46	DIODE MA110	
D109	8-719-404-46	DIODE MA110	
D110	8-719-404-46	DIODE MA110	
D111	8-719-404-46	DIODE MA110	
D112	8-719-404-46	DIODE MA110	
D113	8-719-404-46	DIODE MA110	
D117	8-719-404-46	DIODE MA110	
D120	8-719-404-46	DIODE MA110	
D121	8-719-404-46	DIODE MA110	
D122	8-719-404-46	DIODE MA110	
D123	8-719-404-46	DIODE MA110	
D125	8-719-404-46	DIODE MA110	
D126	8-719-404-46	DIODE MA110	
D127	8-719-404-46	DIODE MA110	
D128	8-719-400-18	DIODE MA152WK	
D129	8-719-404-46	DIODE MA110	
D130	8-719-800-76	DIODE 1SS226	
D131	8-719-800-76	DIODE 1SS226	
D132	8-719-800-76	DIODE 1SS226	
D133	8-719-404-46	DIODE MA110	
D134	8-719-404-46	DIODE MA110	
D135	8-719-404-46	DIODE MA110	
D136	8-719-404-46	DIODE MA110	
D137	8-719-404-46	DIODE MA110	
D138	8-719-404-46	DIODE MA110	
D139	8-719-404-46	DIODE MA110	
D144	8-719-404-46	DIODE MA110	
D145	8-719-404-46	DIODE MA110	
D146	8-719-404-46	DIODE MA110	
D147	8-719-404-46	DIODE MA110	
D148	8-719-404-46	DIODE MA110	
D149	8-719-404-46	DIODE MA110	
D150	8-719-404-46	DIODE MA110	
D151	8-719-404-46	DIODE MA110	
D152	8-719-404-46	DIODE MA110	
D153	8-719-977-20	DIODE DTZ8.2B	
D154	8-719-404-46	DIODE MA110	
D155	8-719-404-46	DIODE MA110	
D156	8-719-404-46	DIODE MA110	
D157	8-719-901-83	DIODE 1SS83	
D158	8-719-901-83	DIODE 1SS83	
D159	8-719-901-83	DIODE 1SS83	

REF.NO.	PART NO.	DESCRIPTION	REMARK
D160	8-719-404-46	DIODE MA110	
D161	8-719-404-46	DIODE MA110	
D162	8-719-404-46	DIODE MA110	
D170	8-719-404-46	DIODE MA110	
D185	8-719-104-34	DIODE 1S2836	
D186	8-719-400-18	DIODE MA152WK	
D187	8-719-800-76	DIODE 1SS226	
D188	8-719-800-76	DIODE 1SS226	
D191	8-719-104-34	DIODE 1S2836	
D285	8-719-404-46	DIODE MA110	
D289	8-719-404-46	DIODE MA110	
D341	8-719-404-46	DIODE MA110	
D342	8-719-104-34	DIODE 1S2836	
D343	8-719-800-76	DIODE 1SS226	
D344	8-719-105-XX	DIODE RD6.2M-B1	
D345	8-719-901-83	DIODE 1SS83	
D346	8-719-901-83	DIODE 1SS83	
D347	8-719-901-83	DIODE 1SS83	
D348	8-719-800-76	DIODE 1SS226	
D349	8-719-800-76	DIODE 1SS226	
D350	8-719-800-76	DIODE 1SS226	
D390	8-719-800-76	DIODE 1SS226	
D393	8-719-404-46	DIODE MA110	
D1382	8-719-104-34	DIODE 1S2836	

<DELAY LINE>

DL101	1-415-632-11	DELAY LINE, Y	

<IC>

IC102	8-759-501-21	IC MM1149XF	
IC103	8-759-501-21	IC MM1149XF	
IC104	8-759-048-09	IC MM1148XF	
IC105	8-759-048-09	IC MM1148XF	
IC106	8-759-009-51	IC MC145388F	
IC107	8-759-509-57	IC XRU4584BF	
IC108	8-759-509-17	IC XRU4053BF	
IC109	8-759-509-37	IC XRU4070BF	
IC110	8-759-509-17	IC XRU4053BF	
IC111	8-759-509-17	IC XRU4053BF	
IC112	8-759-924-12	IC LM7805CT	
IC113	8-759-631-08	IC M51279FP	
IC114	8-759-509-13	IC XRU4052BF	
IC115	8-759-509-13	IC XRU4052BF	
IC116	8-759-509-05	IC XRU4066BF	
IC117	8-759-711-32	IC NJM2245M	
IC118	8-759-711-32	IC NJM2245M	
IC119	8-759-711-32	IC NJM2245M	
IC120	8-759-509-05	IC XRU4066BF	
IC121	8-759-509-17	IC XRU4053BF	
IC122	8-759-998-98	IC LM358D	
IC123	8-759-998-98	IC LM358D	
IC124	8-752-052-62	IC CXA1478S	
IC125	8-759-509-05	IC XRU4066BF	
IC126	8-759-509-17	IC XRU4053BF	
IC127	8-759-998-98	IC LM358D	
IC128	8-759-998-98	IC LM358D	
IC129	8-759-998-98	IC LM358D	

<JUMPER RESISTOR>

JR101	1-216-295-00	METAL GLAZE	0	5%	1/10W
JR105	1-216-295-00	METAL GLAZE	0	5%	1/10W

REF.NO.	REMARK
JR132	1-
JR133	1-
JR178	1-
L101	1-
L102	1-
L103	1-
L104	1-
L105	1-
L106	1-
L107	1-
L112	1-
L113	1-
L114	1-
L115	1-
L116	1-
L117	1-
L118	1-
L250	1-
L251	1-
L252	1-
L300	1-
Q101	8-
Q102	8-
Q103	8-
Q104	8-
Q106	8-
Q107	8-
Q108	8-
Q109	8-
Q112	8-
Q113	8-
Q114	8-
Q115	8-
Q116	8-
Q117	8-
Q118	8-
Q119	8-
Q120	8-
Q121	8-
Q122	8-
Q123	8-
Q124	8-
Q125	8-
Q126	8-
Q127	8-
Q128	8-
Q129	8-
Q130	8-
Q131	8-
Q132	8-
Q133	8-
Q134	8-
Q135	8-
Q136	8-
Q137	8-
Q138	8-
Q139	8-
Q140	8-

B B

REMARK	REF.NO.	PART NO.	DESCRIPTION	REMARK
V	CN102	*1-564-506-11	PLUG, CONNECTOR 3P	
	CN103	*1-565-503-11	CONNECTOR, BOARD TO BOARD 12P	
V	CN104	1-506-477-11	PIN, CONNECTOR 12P	
V	CN105	*1-564-509-11	PLUG, CONNECTOR 6P	
V	CN107	1-506-478-11	PIN, CONNECTOR 13P	
V				
V				
			<TRAP MODULE>	
V				
V	CTR101	1-236-366-11	MODULE, TRAP	
V	CTR102	1-236-365-11	MODULE, TRAP	
V				
V				
			<TRIMMER>	
V				
V	CV101	1-141-418-11	CAP, ADJ	
V	CV102	1-141-418-11	CAP, ADJ	
V				
V				
			<DIODE>	
V				
V	D104	8-719-404-46	DIODE MA110	
V	D105	8-719-404-46	DIODE MA110	
V	D106	8-719-404-46	DIODE MA110	
V	D107	8-719-404-46	DIODE MA110	
V	D108	8-719-404-46	DIODE MA110	
V				
V	D109	8-719-404-46	DIODE MA110	
V	D110	8-719-404-46	DIODE MA110	
V	D111	8-719-404-46	DIODE MA110	
V	D112	8-719-404-46	DIODE MA110	
V	D113	8-719-404-46	DIODE MA110	
V				
V	D117	8-719-404-46	DIODE MA110	
V	D120	8-719-404-46	DIODE MA110	
V	D121	8-719-404-46	DIODE MA110	
V	D122	8-719-404-46	DIODE MA110	
V	D123	8-719-404-46	DIODE MA110	
V				
V	D125	8-719-404-46	DIODE MA110	
V	D126	8-719-404-46	DIODE MA110	
V	D127	8-719-404-46	DIODE MA110	
V	D128	8-719-400-18	DIODE MA152WK	
V	D129	8-719-404-46	DIODE MA110	
V				
V	D130	8-719-800-76	DIODE 1SS226	
V	D131	8-719-800-76	DIODE 1SS226	
V	D132	8-719-800-76	DIODE 1SS226	
V	D133	8-719-404-46	DIODE MA110	
V	D134	8-719-404-46	DIODE MA110	
V				
V	D135	8-719-404-46	DIODE MA110	
V	D136	8-719-404-46	DIODE MA110	
V	D137	8-719-404-46	DIODE MA110	
V	D138	8-719-404-46	DIODE MA110	
V	D139	8-719-404-46	DIODE MA110	
V				
V	D144	8-719-404-46	DIODE MA110	
V	D145	8-719-404-46	DIODE MA110	
V	D146	8-719-404-46	DIODE MA110	
V	D147	8-719-404-46	DIODE MA110	
V	D148	8-719-404-46	DIODE MA110	
V				
V	D149	8-719-404-46	DIODE MA110	
V	D150	8-719-404-46	DIODE MA110	
V	D151	8-719-404-46	DIODE MA110	
V	D152	8-719-404-46	DIODE MA110	
V	D153	8-719-977-20	DIODE DTZ8.2B	
V				
V	D154	8-719-404-46	DIODE MA110	
V	D155	8-719-404-46	DIODE MA110	
V	D156	8-719-404-46	DIODE MA110	
V	D157	8-719-901-83	DIODE 1SS83	
V	D158	8-719-901-83	DIODE 1SS83	
V				
V	D159	8-719-901-83	DIODE 1SS83	

REF.NO.	PART NO.	DESCRIPTION	REMARK
D160	8-719-404-46	DIODE MA110	
D161	8-719-404-46	DIODE MA110	
D162	8-719-404-46	DIODE MA110	
D170	8-719-404-46	DIODE MA110	
D185	8-719-104-34	DIODE 1S2836	
D186	8-719-400-18	DIODE MA152WK	
D187	8-719-800-76	DIODE 1SS226	
D188	8-719-800-76	DIODE 1SS226	
D191	8-719-104-34	DIODE 1S2836	
D285	8-719-404-46	DIODE MA110	
D289	8-719-404-46	DIODE MA110	
D341	8-719-404-46	DIODE MA110	
D342	8-719-104-34	DIODE 1S2836	
D343	8-719-800-76	DIODE 1SS226	
D344	8-719-105-XX	DIODE RD6.2M-B1	
D345	8-719-901-83	DIODE 1SS83	
D346	8-719-901-83	DIODE 1SS83	
D347	8-719-901-83	DIODE 1SS83	
D348	8-719-800-76	DIODE 1SS226	
D349	8-719-800-76	DIODE 1SS226	
D350	8-719-800-76	DIODE 1SS226	
D390	8-719-800-76	DIODE 1SS226	
D393	8-719-404-46	DIODE MA110	
D1382	8-719-104-34	DIODE 1S2836	
		<DELAY LINE>	
DL101	1-415-632-11	DELAY LINE, Y	
		<IC>	
IC102	8-759-501-21	IC MM1149XF	
IC103	8-759-501-21	IC MM1149XF	
IC104	8-759-048-09	IC MM1148XF	
IC105	8-759-048-09	IC MM1148XF	
IC106	8-759-009-51	IC MC14538BF	
IC107	8-759-509-57	IC XRU4584BF	
IC108	8-759-509-17	IC XRU4053BF	
IC109	8-759-509-37	IC XRU4070BF	
IC110	8-759-509-17	IC XRU4053BF	
IC111	8-759-509-17	IC XRU4053BF	
IC112	8-759-924-12	IC LM7805CT	
IC113	8-759-631-08	IC M51279FP	
IC114	8-759-509-13	IC XRU4052BF	
IC115	8-759-509-13	IC XRU4052BF	
IC116	8-759-509-05	IC XRU4066BF	
IC117	8-759-711-32	IC NJM2245M	
IC118	8-759-711-32	IC NJM2245M	
IC119	8-759-711-32	IC NJM2245M	
IC120	8-759-509-05	IC XRU4066BF	
IC121	8-759-509-17	IC XRU4053BF	
IC122	8-759-998-98	IC LM358D	
IC123	8-759-998-98	IC LM358D	
IC124	8-752-052-62	IC CXA1478S	
IC125	8-759-509-05	IC XRU4066BF	
IC126	8-759-509-17	IC XRU4053BF	
IC127	8-759-998-98	IC LM358D	
IC128	8-759-998-98	IC LM358D	
IC129	8-759-998-98	IC LM358D	
		<JUMPER RESISTOR>	
JR101	1-216-295-00	METAL GLAZE 0 5% 1/10W	
JR105	1-216-295-00	METAL GLAZE 0 5% 1/10W	

REF.NO.	PART NO.	DESCRIPTION	REMARK
JR132	1-216-295-00	METAL GLAZE 0 5% 1/10W	
JR133	1-216-295-00	METAL GLAZE 0 5% 1/10W	
JR178	1-216-295-00	METAL GLAZE 0 5% 1/10W	
		<COIL>	
L101	1-410-470-11	INDUCTOR 10UH	
L102	1-410-090-41	INDUCTOR 18MMH	
L103	1-412-002-31	INDUCTOR CHIP 4.7UH	
L104	1-412-002-31	INDUCTOR CHIP 4.7UH	
L105	1-412-002-31	INDUCTOR CHIP 4.7UH	
L106	1-410-470-11	INDUCTOR 10UH	
L107	1-410-470-11	INDUCTOR 10UH	
L112	1-408-419-00	INDUCTOR 68UH	
L113	1-216-296-00	METAL GLAZE 0 5% 1/8W	
L114	1-216-296-00	METAL GLAZE 0 5% 1/8W	
L115	1-216-296-00	METAL GLAZE 0 5% 1/8W	
L116	1-412-011-31	INDUCTOR CHIP 27UH	
L117	1-412-011-31	INDUCTOR CHIP 27UH	
L118	1-412-011-31	INDUCTOR CHIP 27UH	
L250	1-410-997-31	INDUCTOR CHIP 2.2UH	
L251	1-410-999-11	INDUCTOR CHIP 3.3UH	
L252	1-410-478-11	INDUCTOR 47UH	
L300	1-410-482-31	INDUCTOR 100UH	
		<TRANSISTOR>	
Q101	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q102	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q103	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q104	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q106	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q107	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q108	8-729-216-22	TRANSISTOR 2SA1162-G	
Q109	8-729-901-01	TRANSISTOR DTC144EK	
Q112	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q113	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q114	8-729-216-22	TRANSISTOR 2SA1162-G	
Q115	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q116	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q117	8-729-216-22	TRANSISTOR 2SA1162-G	
Q118	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q119	8-729-216-22	TRANSISTOR 2SA1162-G	
Q120	8-729-216-22	TRANSISTOR 2SA1162-G	
Q121	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q122	8-729-216-22	TRANSISTOR 2SA1162-G	
Q123	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q124	8-729-216-22	TRANSISTOR 2SA1162-G	
Q125	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q126	8-729-901-01	TRANSISTOR DTC144EK	
Q127	8-729-216-22	TRANSISTOR 2SA1162-G	
Q128	8-729-216-22	TRANSISTOR 2SA1162-G	
Q129	8-729-901-01	TRANSISTOR DTC144EK	
Q130	8-729-216-22	TRANSISTOR 2SA1162-G	
Q131	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q132	8-729-216-22	TRANSISTOR 2SA1162-G	
Q133	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q134	8-729-901-01	TRANSISTOR DTC144EK	
Q135	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q136	8-729-907-26	TRANSISTOR IMX1	
Q137	8-729-907-26	TRANSISTOR IMX1	
Q138	8-729-907-26	TRANSISTOR IMX1	
Q139	8-729-216-22	TRANSISTOR 2SA1162-G	
Q140	8-729-422-27	TRANSISTOR 2SD601A-Q	

REF.NO.	PART NO.	DESCRIPTION	REMARK
Q141	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q142	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q143	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q144	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q145	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q146	8-729-255-12	TRANSISTOR 2SC2551-O	
Q147	8-729-255-12	TRANSISTOR 2SC2551-O	
Q148	8-729-216-22	TRANSISTOR 2SA1162-G	
Q149	8-729-200-17	TRANSISTOR 2SA1091-O	
Q150	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q151	8-729-216-22	TRANSISTOR 2SA1162-G	
Q152	8-729-200-17	TRANSISTOR 2SA1091-O	
Q153	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q154	8-729-216-22	TRANSISTOR 2SA1162-G	
Q155	8-729-200-17	TRANSISTOR 2SA1091-O	
Q157	8-729-326-11	TRANSISTOR 2SC2611	
Q158	8-729-326-11	TRANSISTOR 2SC2611	
Q159	8-729-326-11	TRANSISTOR 2SC2611	
Q160	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q161	8-729-216-22	TRANSISTOR 2SA1162-G	
Q164	8-729-901-01	TRANSISTOR DTC144EK	
Q165	8-729-216-22	TRANSISTOR 2SA1162-G	
Q166	8-729-216-22	TRANSISTOR 2SA1162-G	
Q167	8-729-216-22	TRANSISTOR 2SA1162-G	
Q168	8-729-216-22	TRANSISTOR 2SA1162-G	
Q170	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q171	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q172	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q173	8-729-216-22	TRANSISTOR 2SA1162-G	
Q174	8-729-216-22	TRANSISTOR 2SA1162-G	
Q175	8-729-216-22	TRANSISTOR 2SA1162-G	
Q176	8-729-216-22	TRANSISTOR 2SA1162-G	
Q177	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q179	8-729-901-01	TRANSISTOR DTC144EK	
Q189	8-729-907-26	TRANSISTOR IMX1	
Q190	8-729-216-22	TRANSISTOR 2SA1162-G	
Q191	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q192	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q193	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q194	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q195	8-729-216-22	TRANSISTOR 2SA1162-G	
Q196	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q197	8-729-216-22	TRANSISTOR 2SA1162-G	
Q198	8-729-216-22	TRANSISTOR 2SA1162-G	
Q199	8-729-216-22	TRANSISTOR 2SA1162-G	
Q200	8-729-901-06	TRANSISTOR DTA144EK	
Q201	8-729-216-22	TRANSISTOR 2SA1162-G	
Q202	8-729-216-22	TRANSISTOR 2SA1162-G	
Q203	8-729-216-22	TRANSISTOR 2SA1162-G	
Q204	8-729-216-22	TRANSISTOR 2SA1162-G	
Q205	8-729-216-22	TRANSISTOR 2SA1162-G	
Q206	8-729-216-22	TRANSISTOR 2SA1162-G	
Q208	8-729-216-22	TRANSISTOR 2SA1162-G	
Q209	8-729-255-12	TRANSISTOR 2SC2551-O	
Q210	8-729-255-12	TRANSISTOR 2SC2551-O	
Q211	8-729-255-12	TRANSISTOR 2SC2551-O	
Q212	8-729-109-44	TRANSISTOR 2SK94	
Q299	8-729-422-27	TRANSISTOR 2SD601A-Q	
		<RESISTOR>	
R101	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R102	1-216-025-00	METAL GLAZE 100 5% 1/10W	
R103	1-216-091-00	METAL GLAZE 56K 5% 1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R104	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R105	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R106	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R107	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R108	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R109	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R110	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R111	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R112	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R113	1-249-401-11	CARBON	47	5%	1/4W	F
R114	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R115	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R117	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R118	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R119	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R120	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R121	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R123	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R124	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R125	1-216-083-00	METAL GLAZE	27K	5%	1/10W	
R126	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R127	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R128	1-216-083-00	METAL GLAZE	27K	5%	1/10W	
R129	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R130	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R136	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R137	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R138	1-216-657-11	METAL CHIP	1.8K	0.50%	1/10W	
R139	1-216-079-00	METAL GLAZE	18K	5%	1/10W	
R140	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R141	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R142	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R143	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R144	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R145	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R146	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R148	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R155	1-216-655-11	METAL CHIP	1.5K	0.50%	1/10W	
R157	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R158	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R160	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R161	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R163	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R164	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R165	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R166	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R167	1-216-635-11	METAL CHIP	220	0.50%	1/10W	
R168	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R169	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R170	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R171	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W	
R172	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R173	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R174	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R175	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R176	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R177	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R178	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R179	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R180	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R181	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W	
R182	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R183	1-216-691-11	METAL CHIP	47K	0.50%	1/10W	
R184	1-216-699-11	METAL CHIP	100K	0.50%	1/10W	
R185	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R186	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R187	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R188	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R189	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R190	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R191	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R192	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R193	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R194	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R195	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R196	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R197	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R198	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R199	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R200	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R201	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R202	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R203	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R204	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R205	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R206	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R207	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R208	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R209	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R210	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R211	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R212	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R213	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R214	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R215	1-216-127-11	METAL GLAZE	1.8M	5%	1/10W	
R216	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R217	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R218	1-216-295-00	METAL GLAZE	0	5%	1/10W	
R219	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R220	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R221	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R222	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R223	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R224	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R225	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R226	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R227	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R228	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R229	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R230	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R231	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R232	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R233	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R234	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R235	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R236	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R237	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R238	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R239	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R240	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R241	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R242	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R243	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R244	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R245	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R246	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R247	1-216-093-00	METAL GLAZE	68K	5%	1/10W	

B

REF.NO.	PART NO.	DESCRIPTION				REMARK
R248	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R249	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R250	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R251	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R252	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R253	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R254	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R255	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R256	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R258	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R259	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R260	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R261	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R262	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R263	1-216-029-00	METAL GLAZE	150	5%	1/10W	
R264	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R265	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R266	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R267	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R268	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R269	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R270	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R271	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R272	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R273	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R275	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R276	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R277	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R278	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R280	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R281	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R282	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R283	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R284	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R286	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R287	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R288	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R289	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R290	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R292	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R293	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R295	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R296	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W	
R297	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W	
R298	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R300	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R301	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R302	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R303	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R304	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R305	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R306	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R307	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R308	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R309	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R310	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R311	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R312	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R313	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R314	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R315	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R316	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R317	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R318	1-216-105-00	METAL GLAZE	220K	5%	1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R319	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R320	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R321	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R325	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R326	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R328	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R329	1-216-107-00	METAL GLAZE	270K	5%	1/10W	
R330	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R331	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R332	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R333	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R334	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R335	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R336	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R338	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R339	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R340	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R342	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R343	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W	
R344	1-216-664-11	METAL CHIP	3.6K	0.50%	1/10W	
R345	1-216-661-11	METAL CHIP	2.7K	0.50%	1/10W	
R346	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R348	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R349	1-216-650-11	METAL CHIP	910	0.50%	1/10W	
R350	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R351	1-216-650-11	METAL CHIP	910	0.50%	1/10W	
R352	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R353	1-216-650-11	METAL CHIP	910	0.50%	1/10W	
R354	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R355	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R356	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R357	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R358	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R359	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R360	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R363	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R364	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R365	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R366	1-216-244-00	METAL GLAZE	82K	5%	1/8W	
R367	1-216-244-00	METAL GLAZE	82K	5%	1/8W	
R368	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R369	1-216-248-00	METAL GLAZE	120K	5%	1/8W	
R370	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R371	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R372	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R374	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R375	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R376	1-216-663-11	METAL CHIP	3.3K	0.50%	1/10W	
R378	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R379	1-216-641-11	METAL CHIP	390	0.50%	1/10W	
R380	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R381	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R382	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R383	1-216-641-11	METAL CHIP	390	0.50%	1/10W	
R384	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R385	1-216-117-00	METAL GLAZE	680K	5%	1/10W	
R386	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R387	1-216-641-11	METAL CHIP	390	0.50%	1/10W	
R388	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R389	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R390	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R391	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R392	1-216-113-00	METAL GLAZE	470K	5%	1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R393	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R394	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R397	1-249-437-11	CARBON	47K	5%	1/4W	F
R398	1-249-434-11	CARBON	27K	5%	1/4W	F
R399	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1001	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1002	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1003	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1004	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1005	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1006	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1007	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1008	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1009	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1010	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1011	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1012	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R1013	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R1014	1-216-246-00	METAL GLAZE	100K	5%	1/8W	
R1015	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1016	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1017	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1018	1-216-043-00	METAL GLAZE	560	5%	1/10W	
R1019	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1020	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1021	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1022	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1023	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1024	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1025	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1026	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1027	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R1028	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1029	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1031	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1032	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1033	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1034	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1035	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1036	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1038	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1040	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1042	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1043	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1044	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1045	1-216-125-00	METAL GLAZE	1.5M	5%	1/10W	
R1046	1-216-689-11	METAL CHIP	39K	0.50%	1/10W	
R1047	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1048	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1049	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1050	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1051	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R1058	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1059	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1060	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1061	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1062	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1063	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1064	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1065	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1066	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1067	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1068	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1069	1-216-133-00	METAL GLAZE	3.3M	5%	1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R1070	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1071	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1072	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1073	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W	
R1075	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1076	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R1077	1-216-103-00	METAL GLAZE	180K	5%	1/10W	
R1078	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1079	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1080	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1081	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1083	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1084	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1088	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1090	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1091	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1092	1-216-045-00	METAL GLAZE	680	5%	1/10W	
R1093	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R1094	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1095	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1096	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1200	1-216-699-11	METAL CHIP	100K	0.50%	1/10W	
R1201	1-218-754-11	METAL CHIP	120K	0.50%	1/10W	
R1207	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1208	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1220	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1221	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1222	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1223	1-216-689-11	METAL GLAZE	39K	5%	1/10W	
R1225	1-215-876-00	METAL OXIDE	15K	5%	1W	F
R1226	1-215-876-00	METAL OXIDE	15K	5%	1W	F
R1227	1-215-876-00	METAL OXIDE	15K	5%	1W	F
R1228	1-249-421-11	CARBON	2.2K	5%	1/4W	F
R1229	1-249-421-11	CARBON	2.2K	5%	1/4W	F
R1230	1-249-421-11	CARBON	2.2K	5%	1/4W	F
R1231	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1232	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1233	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1234	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1235	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1236	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1237	1-249-419-11	CARBON	1.5K	5%	1/4W	F
R1238	1-249-419-11	CARBON	1.5K	5%	1/4W	F
R1239	1-249-419-11	CARBON	1.5K	5%	1/4W	F
R1270	1-216-079-00	METAL GLAZE	18K	5%	1/10W	
R1280	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1290	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W	
R1291	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1294	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R1295	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1296	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R1297	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R1298	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R1299	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R1300	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1301	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1302	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1303	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1304	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R1305	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R1306	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1307	1-216-041-00	METAL GLAZE	470	5%	1/10W	
R1308	1-216-041-00	METAL GLAZE	470	5%	1/10W	

B D

REF.NO.	PART NO.	DESCRIPTION				REMARK
R1309	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1310	1-216-119-00	METAL GLAZE	820K	5%	1/10W	
R1313	1-216-101-00	METAL GLAZE	150K	5%	1/10W	
R1314	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W	
R1315	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R1320	1-216-083-00	METAL GLAZE	27K	5%	1/10W	
R1321	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R1322	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R1323	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1324	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R1325	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R1326	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1327	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1328	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1329	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R1330	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1331	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W	
R1332	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1333	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1334	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1335	1-216-035-00	METAL GLAZE	270	5%	1/10W	
R1336	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1337	1-216-113-00	METAL GLAZE	470K	5%	1/10W	
R1338	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1339	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1340	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1341	1-216-111-00	METAL GLAZE	390K	5%	1/10W	
R1342	1-216-694-11	METAL CHIP	62K	0.50%	1/10W	
R1343	1-216-121-00	METAL GLAZE	1M	5%	1/10W	
R1344	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1345	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	
R1346	1-216-047-00	METAL GLAZE	820	5%	1/10W	
R1347	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1348	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1349	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1350	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1351	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1352	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1353	1-216-115-00	METAL GLAZE	560K	5%	1/10W	
R1371	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1372	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1373	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1380	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1381	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1382	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R1383	1-216-091-00	METAL GLAZE	56K	5%	1/10W	
R1392	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1393	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
		<VARIABLE RESISTOR>				
RV101	1-241-763-11	RES, ADJ, CERMET	4.7K			
RV102	1-241-763-11	RES, ADJ, CERMET	4.7K			
RV103	1-238-009-11	RES, ADJ, CARBON	220			
RV104	1-238-009-11	RES, ADJ, CARBON	220			
RV105	1-241-627-11	RES, ADJ, CARBON	1K			
RV106	1-241-627-11	RES, ADJ, CARBON	1K			
RV107	1-241-627-11	RES, ADJ, CARBON	1K			
RV108	1-241-630-11	RES, ADJ, CARBON	10K			
RV109	1-241-765-11	RES, ADJ, CERMET	22K			
RV110	1-241-630-11	RES, ADJ, CARBON	10K			
RV111	1-241-630-11	RES, ADJ, CARBON	10K			
RV112	1-238-019-11	RES, ADJ, CARBON	47K			
RV113	1-238-019-11	RES, ADJ, CARBON	47K			
RV114	1-238-019-11	RES, ADJ, CARBON	47K			
RV115	1-241-631-11	RES, ADJ, CARBON	22K			
RV116	1-241-631-11	RES, ADJ, CARBON	22K			
RV118	1-241-631-11	RES, ADJ, CARBON	22K			
RV119	1-241-631-11	RES, ADJ, CARBON	22K			
RV120	1-241-631-11	RES, ADJ, CARBON	22K			
RV121	1-241-631-11	RES, ADJ, CARBON	22K			
RV122	1-241-631-11	RES, ADJ, CARBON	22K			
RV123	1-241-628-11	RES, ADJ, CARBON	2.2K			
RV124	1-241-627-11	RES, ADJ, CARBON	1K			
RV125	1-241-627-11	RES, ADJ, CARBON	1K			
RV205	1-241-631-11	RES, ADJ, CARBON	22K			
		<MODULE>				
SEP101	1-808-654-11	MODULE				
		<CRYSTAL>				
X101	1-527-722-00	OSCILLATOR, CRYSTAL				
X102	1-577-259-11	VIBRATOR, CRYSTAL				
		**********				
	*A-1346-067-A	D BOARD, COMPLETE				
		**********				
	*3-738-015-01	COVER, (DIA. 6) CARBON VR				
	4-382-854-01	SCREW (M3X8), P, SW (+)				
		<CAPACITOR>				
C501	1-124-477-11	ELECT	47MF	20%	16V	
C502	1-124-907-11	ELECT	10MF	20%	50V	
C503	1-126-103-11	ELECT	470MF	20%	16V	
C504	1-124-902-00	ELECT	0.47MF	20%	50V	
C505	1-106-381-12	MYLAR	0.039MF	10%	100V	
C506	1-124-903-11	ELECT	1MF	20%	50V	
C507	1-106-367-00	MYLAR	0.01MF	10%	100V	
C508	1-124-903-11	ELECT	1MF	20%	50V	
C509	1-136-173-00	FILM	0.47MF	5%	50V	
C510	1-136-161-00	FILM	0.047MF	5%	50V	
C511	1-124-903-11	ELECT	1MF	20%	50V	
C512	1-106-375-12	MYLAR	0.022MF	10%	100V	
C513	1-106-375-12	MYLAR	0.022MF	10%	100V	
C514	1-106-371-00	MYLAR	0.015MF	10%	100V	
C515	1-124-925-11	ELECT	2.2MF	20%	50V	
C516	1-124-925-11	ELECT	2.2MF	20%	50V	
C517	1-130-480-00	FILM	0.0056MF	5%	50V	
C518	1-163-245-11	CERAMIC CHIP	56PF	5%	50V	
C519	1-124-927-11	ELECT	4.7MF	20%	50V	
C520	1-163-129-00	CERAMIC CHIP	330PF	5%	50V	
C521	1-124-907-11	ELECT	10MF	20%	50V	
C523	1-106-363-00	MYLAR	0.0068MF	10%	100V	
C524	1-102-116-00	CERAMIC	680PF	10%	50V	
C525	1-102-820-00	CERAMIC	330PF	5%	50V	
C526	1-102-973-00	CERAMIC	100PF	5%	50V	
C527	1-124-514-11	ELECT	100MF	20%	50V	
C528	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C529	1-124-513-11	ELECT	47MF	20%	50V	
C530	1-163-097-00	CERAMIC CHIP	15PF	5%	50V	
C531	1-131-370-00	TANTALUM	6.8MF	10%	16V	
C532	1-124-557-11	ELECT	1000MF	20%	25V	
C533	1-124-927-11	ELECT	4.7MF	20%	50V	
C534	1-124-768-11	ELECT	4.7MF	20%	50V	

D

The components identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION			REMARK
C535	1-136-161-00	FILM	0.047MF	5%	50V
C536	1-124-927-11	ELECT	4.7MF	20%	50V
C537	1-124-510-11	ELECT	220MF	20%	35V
C538	1-124-910-11	ELECT	47MF	20%	50V
C539	1-136-828-11	FILM	1.8MF	5%	200V
C540	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C541	1-163-035-00	CERAMIC CHIP	0.047MF		50V
C542	1-126-103-11	ELECT	470MF	20%	16V
C545	1-126-101-11	ELECT	100MF	20%	16V
C546	1-124-907-11	ELECT	10MF	20%	50V
C547	1-124-907-11	ELECT	10MF	20%	50V
C548	1-124-907-11	ELECT	10MF	20%	50V
C549	1-124-907-11	ELECT	10MF	20%	50V
C550	1-124-907-11	ELECT	10MF	20%	50V
C551	1-124-927-11	ELECT	4.7MF	20%	50V
C552	1-101-004-00	CERAMIC	0.01MF		50V
C553	1-126-103-11	ELECT	470MF	20%	16V
C563	1-106-383-00	MYLAR	0.047MF	10%	100V
C564	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C567	1-123-875-11	ELECT	10MF	20%	50V
C568	1-130-736-11	FILM	0.01MF	5%	50V
C569	1-130-471-00	FILM	0.001MF	5%	50V
C570	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C571	1-124-913-11	ELECT	470MF	20%	50V
C572	1-101-004-00	CERAMIC	0.01MF		50V
C574	1-106-351-00	MYLAR	0.0022MF	10%	100V
C575	1-106-351-00	MYLAR	0.0022MF	10%	100V
C831	1-123-875-11	ELECT	10MF	20%	50V
C832	1-123-875-11	ELECT	10MF	20%	50V
C833	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C834	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C835	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C836	1-123-875-11	ELECT	10MF	20%	50V
C837	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C838	1-136-163-00	FILM	0.068MF	5%	50V
C839	1-102-122-00	CERAMIC	0.0027MF	10%	50V
C840	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C841	1-163-209-00	CERAMIC CHIP	0.0015MF	5%	50V
C843	1-124-042-51	ELECT	0.47MF	20%	50V
C844	1-124-902-00	ELECT	0.47MF	20%	50V
C845	1-124-126-00	ELECT	47MF	20%	10V
C846	1-124-907-11	ELECT	10MF	20%	50V
C847	1-126-233-11	ELECT	22MF	20%	50V
C848	1-131-351-00	TANTALUM	4.7MF	10%	35V
C849	1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C1601	1-124-907-11	ELECT	10MF	20%	50V
C1602	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C1603	1-104-348-11	ELECT	15MF	20%	50V
C1604	1-128-500-51	ELECT	1000MF	20%	50V
C1605	1-124-922-11	ELECT	1000MF	20%	50V
C1606	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C1607	1-124-907-11	ELECT	10MF	20%	50V
C1608	1-124-916-11	ELECT	22MF	20%	50V
C1609	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C1610	1-126-163-11	ELECT	4.7MF	20%	50V
C1611	1-124-482-11	ELECT	33MF	20%	35V
C1612	1-136-257-00	FILM	0.0039MF	5%	50V
C1613	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C1614	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C1615	1-124-042-51	ELECT	0.47MF	20%	50V
C1620	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C1621	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C1641	1-163-035-00	CERAMIC CHIP	0.047MF		50V

REF.NO.	PART NO.	DESCRIPTION	REMARK
		<CONNECTOR>	
CN501	*1-564-506-11	PLUG, CONNECTOR 3P	
CN502	1-506-477-11	PIN, CONNECTOR 12P	
CN504	*1-564-507-11	PLUG, CONNECTOR 4P	
CN505	*1-564-509-11	PLUG, CONNECTOR 6P	
CN507	*1-564-507-11	PLUG, CONNECTOR 4P	
CN508	*1-564-104-00	PIN, CONNECTOR (B3P-VH) 3P	
CN509	*1-564-506-11	PLUG, CONNECTOR 3P	
		<DIODE>	
D501	8-719-404-46	DIODE MA110	
D502	8-719-404-46	DIODE MA110	
D503	8-719-404-46	DIODE MA110	
D504	8-719-404-46	DIODE MA110	
D506	8-719-908-03	DIODE GP08D	
D507	8-719-404-46	DIODE MA110	
D508	8-719-404-46	DIODE MA110	
D511	8-719-404-46	DIODE MA110	
D512	8-719-404-46	DIODE MA110	
D514	8-719-404-46	DIODE MA110	
D520	8-719-800-76	DIODE 1SS226	
D521	8-719-800-76	DIODE 1SS226	
D589	8-719-800-76	DIODE 1SS226	
D831	8-719-404-46	DIODE MA110	
D832	8-719-404-46	DIODE MA110	
D833	8-719-404-46	DIODE MA110	
D834	8-719-404-46	DIODE MA110	
D835	8-719-109-89	DIODE RD5.6ES-B2	
D836	8-719-977-69	DIODE DTZ24B	
D848	8-719-800-76	DIODE 1SS226	
D1601	8-719-105-XX	DIODE RD6.2M-B1	
D1603	8-719-977-61	DIODE DTZ20B	
D1606	8-719-981-00	DIODE ERC81-004	
D1607	8-719-981-00	DIODE ERC81-004	
D1608	8-719-977-02	DIODE DTZ5.6A	
D1609	8-719-977-49	DIODE DTZ15B	
D1610	8-719-404-46	DIODE MA110	
D1611	8-729-101-31	TRANSISTOR N13T1	
D1612	8-719-404-46	DIODE MA110	
D1615	8-719-404-46	DIODE MA110	
D1617	8-719-977-49	DIODE DTZ15B	
D1618	8-719-977-49	DIODE DTZ15B	
D1620	8-719-400-18	DIODE MA152WK	
D1622	8-719-400-18	DIODE MA152WK	
D1623	8-719-400-18	DIODE MA152WK	
D1626	8-719-404-46	DIODE MA110	
D1627	8-719-404-46	DIODE MA110	
D1628	8-719-404-46	DIODE MA110	
D1635	8-719-404-46	DIODE MA110	
D1699	8-719-404-46	DIODE MA110	
		<FUSE>	
F1601A	1-532-777-21	FUSE, MICRO (SECONDARY) (1.25A/125V)	
	1-533-189-11	HOLDER, FUSE: F1601	
		<IC>	

D

REF.NO.	PART NO.	DESCRIPTION	REMARK
IC501	8-759-909-70	IC CX23025	
IC502	8-759-100-60	IC UPC1377C	
IC503	8-759-801-98	IC LA7830	
IC504	8-759-701-79	IC MC7812CT	
IC505	8-759-009-51	IC MC14538BF	
IC831	8-759-509-29	IC XBU40218F	
IC832	8-759-509-37	IC XBU40708F	
IC833	8-759-009-51	IC MC14538BF	
IC1601	8-759-509-91	IC XBA10393F	
		<JUMPER RESISTOR>	
JR510	1-216-295-00	METAL GLAZE 0 5% 1/10W	
		<COIL>	
L501	1-410-093-11	INDUCTOR 33MMK	
L502	1-410-665-31	INDUCTOR 15UH	
L503	1-424-625-11	COIL, CHOKE (PMC) 390UH	
L506	1-412-530-31	INDUCTOR 27UH	
L1601	1-459-155-00	COIL (WITH CORE) 47UH	
L1602	1-402-785-11	COIL, CHOKE 600UH	
L1603	1-410-397-21	FERRITE BEAD INDUCTOR	
		<TRANSISTOR>	
Q501	8-729-901-01	TRANSISTOR DTC144EK	
Q502	8-729-901-01	TRANSISTOR DTC144EK	
Q503	8-729-901-06	TRANSISTOR DTA144EK	
Q504	8-729-901-01	TRANSISTOR DTC144EK	
Q505	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q508	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q509	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q510	8-729-901-06	TRANSISTOR DTA144EK	
Q512	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q513	8-729-216-22	TRANSISTOR 2SA1162-G	
Q515	8-729-313-42	TRANSISTOR 2SD1134-C	
Q518	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q519	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q532	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q569	8-729-907-26	TRANSISTOR IMX1	
Q576	8-729-920-48	TRANSISTOR IMH2	
Q579	8-729-920-48	TRANSISTOR IMH2	
Q589	8-729-216-22	TRANSISTOR 2SA1162-G	
Q599	8-729-920-48	TRANSISTOR IMH2	
Q833	8-729-216-22	TRANSISTOR 2SA1162-G	
Q834	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q835	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q836	8-729-255-12	TRANSISTOR 2SC2551-O	
Q1601	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1602	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1603	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1604	8-729-216-22	TRANSISTOR 2SA1162-G	
Q1605	8-729-119-80	TRANSISTOR 2SC2688-L	
Q1606	8-729-133-42	TRANSISTOR 2SC2334-L	
Q1607	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1608	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1609	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1610	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1611	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1612	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1613	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1614	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q1615	8-729-216-22	TRANSISTOR 2SA1162-G	

REF.NO.	PART NO.	DESCRIPTION	REMARK
Q1616	8-729-216-22	TRANSISTOR 2SA1162-G	
Q1617	8-729-216-22	TRANSISTOR 2SA1162-G	
Q1618	8-729-216-22	TRANSISTOR 2SA1162-G	
		<RESISTOR>	
R501	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R502	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R503	1-249-437-11	CARBON 47K 5% 1/4W	F
R504	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R505	1-249-393-11	CARBON 10 5% 1/4W	F
R506	1-216-071-00	METAL GLAZE 8.2K 5% 1/10W	
R507	1-216-059-00	METAL GLAZE 2.7K 5% 1/10W	
R508	1-216-085-00	METAL GLAZE 33K 5% 1/10W	
R509	1-216-687-11	METAL CHIP 33K 0.50% 1/10W	
R510	1-216-683-11	METAL CHIP 22K 0.50% 1/10W	
R511	1-216-675-11	METAL CHIP 10K 0.50% 1/10W	
R512	1-218-761-11	METAL CHIP 240K 0.50% 1/10W	
R513	1-216-065-00	METAL GLAZE 4.7K 5% 1/10W	
R514	1-218-754-11	METAL CHIP 120K 0.50% 1/10W	
R515	1-216-081-00	METAL GLAZE 22K 5% 1/10W	
R516	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R517	1-218-768-11	METAL CHIP 470K 0.50% 1/10W	
R518	1-249-422-11	CARBON 2.7K 5% 1/4W	F
R519	1-216-085-00	METAL GLAZE 33K 5% 1/10W	
R520	1-216-677-11	METAL CHIP 12K 0.50% 1/10W	
R521	1-216-067-00	METAL GLAZE 5.6K 5% 1/10W	
R522	1-216-107-00	METAL GLAZE 270K 5% 1/10W	
R523	1-216-081-00	METAL GLAZE 22K 5% 1/10W	
R524	1-216-049-00	METAL GLAZE 1K 5% 1/10W	
R525	1-216-434-11	METAL OXIDE 1.8K 5% 1W	F
R526	1-216-079-00	METAL GLAZE 18K 5% 1/10W	
R527	1-249-437-11	CARBON 47K 5% 1/4W	F
R528	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R529	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R530	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R531	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R532	1-216-097-00	METAL GLAZE 100K 5% 1/10W	
R533	1-216-089-00	METAL GLAZE 47K 5% 1/10W	
R534	1-216-097-00	METAL GLAZE 100K 5% 1/10W	
R535	1-216-053-00	METAL GLAZE 1.5K 5% 1/10W	
R536	1-212-881-11	FUSIBLE 100 5% 1/4W	F
R537	1-215-867-00	METAL OXIDE 470 5% 1W	F
R538	1-216-095-00	METAL GLAZE 82K 5% 1/10W	
R539	1-216-095-00	METAL GLAZE 82K 5% 1/10W	
R540	1-216-101-00	METAL GLAZE 150K 5% 1/10W	
R541	1-216-063-00	METAL GLAZE 3.9K 5% 1/10W	
R542	1-216-075-00	METAL GLAZE 12K 5% 1/10W	
R543	1-216-065-00	METAL GLAZE 4.7K 5% 1/10W	
R544	1-216-101-00	METAL GLAZE 150K 5% 1/10W	
R545	1-216-041-00	METAL GLAZE 470 5% 1/10W	
R546	1-216-091-00	METAL GLAZE 56K 5% 1/10W	
R547	1-216-121-00	METAL GLAZE 1M 5% 1/10W	
R548	1-216-107-00	METAL GLAZE 270K 5% 1/10W	
R549	1-216-101-00	METAL GLAZE 150K 5% 1/10W	
R550	1-216-354-11	METAL OXIDE 2.7 5% 1W	F
R552	1-216-061-00	METAL GLAZE 3.3K 5% 1/10W	
R553	1-216-091-00	METAL GLAZE 56K 5% 1/10W	
R554	1-216-073-00	METAL GLAZE 10K 5% 1/10W	
R555	1-216-077-00	METAL GLAZE 15K 5% 1/10W	
R557	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R558	1-216-049-00	METAL GLAZE 1K 5% 1/10W	
R559	1-216-065-00	METAL GLAZE 4.7K 5% 1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R560	1-216-037-00	METAL GLAZE	330	5%	1/10W	
R561	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R562	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R563	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R564	1-249-410-11	CARBON	270	5%	1/4W	F
R565	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R566	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R567	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R568	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R569	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R570	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R571	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R572	1-216-095-00	METAL GLAZE	82K	5%	1/10W	
R573	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R574	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R575	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R576	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R577	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R578	1-249-457-11	CARBON	6.8	5%	1/4W	F
R579	1-249-457-11	CARBON	6.8	5%	1/4W	F
R580	1-216-001-00	METAL GLAZE	10	5%	1/10W	
R590	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R591	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R592	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R831	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R832	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R833	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R834	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
R835	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R836	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R837	1-216-075-00	METAL GLAZE	12K	5%	1/10W	
R838	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R839	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R840	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R841	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R842	1-216-093-00	METAL GLAZE	68K	5%	1/10W	
R843	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R844	1-216-077-00	METAL GLAZE	15K	5%	1/10W	
R847	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R850	1-216-085-00	METAL GLAZE	33K	5%	1/10W	
R851	1-216-669-11	METAL CHIP	5.6K	0.50%	1/10W	
R852	1-216-675-11	METAL CHIP	10K	0.50%	1/10W	
R853	1-216-105-00	METAL GLAZE	220K	5%	1/10W	
R854	1-218-754-11	METAL CHIP	120K	0.50%	1/10W	
R855	1-216-697-11	METAL CHIP	82K	0.50%	1/10W	
R856	1-218-755-11	METAL CHIP	130K	0.50%	1/10W	
R857	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R858	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R859	1-215-436-00	METAL OXIDE	3.9K	5%	1W	F
R860	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R861	1-216-672-11	METAL CHIP	7.5K	0.50%	1/10W	
R862	1-216-675-11	METAL CHIP	10K	0.50%	1/10W	
R863	1-249-435-11	CARBON	33K	5%	1/4W	F
R1503	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1504	1-216-689-11	METAL CHIP	39K	0.50%	1/10W	
R1505	1-216-089-00	METAL GLAZE	47K	5%	1/10W	
R1506	1-216-667-11	METAL CHIP	4.7K	0.50%	1/10W	
R1507	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1508	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1509	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1510	1-249-425-11	CARBON	4.7K	5%	1/4W	F
R1511	1-216-033-00	METAL GLAZE	220	5%	1/10W	
R1512	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1513	1-216-017-00	METAL GLAZE	47	5%	1/10W	

REF.NO.	PART NO.	DESCRIPTION				REMARK
R1519	1-216-031-00	METAL GLAZE	180	5%	1/10W	
R1520	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1601	1-216-685-11	METAL CHIP	27K	0.50%	1/10W	
R1602	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R1603	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R1604	1-249-433-11	CARBON	22K	5%	1/4W	F
R1605	1-216-070-00	METAL GLAZE	7.5K	5%	1/10W	
R1606	1-216-070-00	METAL GLAZE	7.5K	5%	1/10W	
R1607	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W	
R1608	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1609	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1610	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1611	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1612	1-215-913-11	METAL OXIDE	220	5%	3W	F
R1613	1-216-025-00	METAL GLAZE	100	5%	1/10W	
R1614	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	
R1615	1-216-657-11	METAL CHIP	1.8K	0.50%	1/10W	
R1616	1-216-629-11	METAL CHIP	120	0.50%	1/10W	
R1617	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W	
R1618	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1620	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1621	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1622	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1623	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1624	1-216-246-00	METAL GLAZE	100K	5%	1/8W	
R1625	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W	
R1626	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	
R1627	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1628	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1629	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R1630	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R1631	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	
R1632	1-216-042-00	METAL GLAZE	510	5%	1/10W	
R1633	1-216-109-00	METAL GLAZE	330K	5%	1/10W	
R1634	1-216-099-00	METAL GLAZE	120K	5%	1/10W	
R1635	1-216-097-00	METAL GLAZE	100K	5%	1/10W	
R1636	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1640	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1641	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1642	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1643	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1644	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1645	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1646	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
R1647	1-216-685-11	METAL CHIP	27K	0.50%	1/10W	
R1648	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1649	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1650	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1651	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1652	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1653	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W	
R1654	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R1655	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1656	1-216-643-11	METAL CHIP	470	0.50%	1/10W	
R1657	1-216-081-00	METAL GLAZE	22K	5%	1/10W	
R1658	1-216-063-00	METAL GLAZE	3.9K	5%	1/10W	
R1659	1-216-049-00	METAL GLAZE	1K	5%	1/10W	
R1660	1-216-649-11	METAL CHIP	820	0.50%	1/10W	
R1661	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	

<VARIABLE RESISTOR>

RV501	1-238-019-11	RES, ADJ, CARBON 47K

D S

* The components identified by ⚠ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF.NO.	PART NO.	DESCRIPTION			REMARK
RV502	1-241-531-11	RES, ADJ, CARBON 22K			
RV503	1-241-763-11	RES, ADJ, CERMET 4.7K			
RV504	1-224-250-XX	RES, ADJ, METAL GLAZE 2.2K			
RV505	1-238-009-11	RES, ADJ, CARBON 220			
RV506	1-241-627-11	RES, ADJ, CARBON 1K			
RV507	1-241-628-11	RES, ADJ, CARBON 2.2K			
RV508	1-241-627-11	RES, ADJ, CARBON 1K			
RV509	1-238-020-11	RES, ADJ, CARBON 100K			
RV511	1-241-629-11	RES, ADJ, CARBON 4.7K			
RV512	1-241-629-11	RES, ADJ, CARBON 4.7K			
RV514	1-238-019-11	RES, ADJ, CARBON 47K			
RV515	1-238-021-11	RES, ADJ, CARBON 220K			
RV516	1-241-763-11	RES, ADJ, CERMET 4.7K			
RV831	1-228-997-00	RES, ADJ, METAL GLAZE 100K			
RV832	1-241-764-11	RES, ADJ, CERMET 10K			
⚠RV833	1-228-997-11	RES, ADJ, METAL GLAZE 100K			
RV1601	1-241-762-11	RES, ADJ, CERMET 2.2K			
RV1602	1-241-627-11	RES, ADJ, CARBON 1K			
⚠RV1603	1-228-996-11	RES, ADJ, METAL GLAZE 47K			
		<RELAY>			
RY1601	1-515-481-21	RELAY (G2R-212P-V)			
		<TRANSFORMER>			
T1601	1-437-216-11	TRANSFORMER, DRIVE			
		<THERMISTOR>			
TH501	1-807-971-11	THERMISTOR			
		**********			
	A-1394-392-A	S BOARD, COMPLETE			
		**********			
		<CAPACITOR>			
C1101	1-163-119-00	CERAMIC CHIP 120PF	5%	50V	
C1102	1-164-004-11	CERAMIC CHIP 0.1MF	10%	25V	
C1103	1-126-589-11	ELECT 47MF	20%	16V	
C1104	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C1105	1-163-114-00	CERAMIC CHIP 75PF	5%	50V	
C1106	1-163-101-00	CERAMIC CHIP 22PF	5%	50V	
C1107	1-164-004-11	CERAMIC CHIP 0.1MF	10%	25V	
C1108	1-163-119-00	CERAMIC CHIP 120PF	5%	50V	
C1109	1-163-031-11	CERAMIC CHIP 0.01MF		50V	
C1110	1-163-117-00	CERAMIC CHIP 100PF	5%	50V	
C1111	1-163-018-00	CERAMIC CHIP 0.0056MF	10%	50V	
C1112	1-126-160-11	ELECT 1MF	20%	50V	
C1113	1-163-119-00	CERAMIC CHIP 120PF	5%	50V	
C1114	1-163-103-00	CERAMIC CHIP 27PF	5%	50V	
C1115	1-164-004-11	CERAMIC CHIP 0.1MF	10%	25V	
C1116	1-163-114-00	CERAMIC CHIP 75PF	5%	50V	
C1117	1-124-589-11	ELECT 47MF	20%	16V	
C1118	1-164-004-11	CERAMIC CHIP 0.1MF	10%	25V	
C1119	1-163-020-00	CERAMIC CHIP 0.0082MF	10%	50V	
C1120	1-163-097-00	CERAMIC CHIP 15PF	5%	50V	
C1121	1-163-097-00	CERAMIC CHIP 15PF	5%	50V	
C1122	1-163-222-11	CERAMIC CHIP 5PF	0.25PF	50V	
C1123	1-163-097-00	CERAMIC CHIP 15PF	5%	50V	
C1130	1-163-097-00	CERAMIC CHIP 15PF	5%	50V	
C1131	1-163-097-00	CERAMIC CHIP 15PF	5%	50V	

REF.NO.	PART NO.	DESCRIPTION			REMARK
		<CONNECTOR>			
CN1101	*1-565-488-11	CONNECTOR, BOARD TO BOARD 12P			
		<DIODE>			
D1101	8-719-404-46	DIODE MA110			
D1102	8-719-404-46	DIODE MA110			
		<IC>			
IC1101	8-752-056-67	IC CXA1214P			
		<COIL>			
L1101	1-408-411-00	INDUCTOR 15UH			
L1102	1-404-496-00	COIL			
L1103	1-404-496-00	COIL			
L1104	1-408-411-00	INDUCTOR 15UH			
L1110	1-412-008-31	INDUCTOR CHIP 15UH			
L1111	1-412-008-31	INDUCTOR CHIP 15UH			
		<TRANSISTOR>			
Q1101	8-729-216-22	TRANSISTOR 2SA1162-G			
Q1102	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q1103	8-729-216-22	TRANSISTOR 2SA1162-G			
Q1104	8-729-216-22	TRANSISTOR 2SA1162-G			
Q1105	8-729-901-01	TRANSISTOR DTC144EK			
Q1106	8-729-901-01	TRANSISTOR DTC144EK			
Q1107	8-729-109-44	TRANSISTOR 2SK94			
Q1108	8-729-422-27	TRANSISTOR 2SD601A-Q			
		<RESISTOR>			
R1101	1-216-053-00	METAL GLAZE 1.5K	5%	1/10W	
R1102	1-216-067-00	METAL GLAZE 5.6K	5%	1/10W	
R1103	1-216-059-00	METAL GLAZE 2.7K	5%	1/10W	
R1104	1-216-073-00	METAL GLAZE 10K	5%	1/10W	
R1105	1-216-031-00	METAL GLAZE 180	5%	1/10W	
R1106	1-216-059-00	METAL GLAZE 2.7K	5%	1/10W	
R1107	1-216-071-00	METAL GLAZE 8.2K	5%	1/10W	
R1108	1-216-039-00	METAL GLAZE 390	5%	1/10W	
R1109	1-216-063-00	METAL GLAZE 3.9K	5%	1/10W	
R1110	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	
R1111	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	
R1112	1-216-059-00	METAL GLAZE 2.7K	5%	1/10W	
R1113	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	
R1114	1-216-055-00	METAL GLAZE 1.8K	5%	1/10W	
R1115	1-216-061-00	METAL GLAZE 3.3K	5%	1/10W	
R1116	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	
R1117	1-216-061-00	METAL GLAZE 3.3K	5%	1/10W	
R1118	1-216-073-00	METAL GLAZE 10K	5%	1/10W	
R1119	1-216-049-00	METAL GLAZE 1K	5%	1/10W	
R1120	1-216-097-00	METAL GLAZE 100K	5%	1/10W	
R1121	1-216-121-00	METAL GLAZE 1M	5%	1/10W	
R1122	1-216-039-00	METAL GLAZE 390	5%	1/10W	
R1123	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	
R1124	1-216-029-00	METAL GLAZE 150	5%	1/10W	
R1125	1-216-029-00	METAL GLAZE 150	5%	1/10W	
R1126	1-216-053-00	METAL GLAZE 1.5K	5%	1/10W	
R1127	1-216-043-00	METAL GLAZE 560	5%	1/10W	
R1128	1-216-049-00	METAL GLAZE 1K	5%	1/10W	